

RTU MODULE SPECIFICATIONS

Refer to our website for information on the I/O modules.

GENERAL SPECIFICATIONS

**Max. number of I/O modules:** 16  
(Max. consumption current of I/O modules: 1.6 A)  
**Isolation:** Ethernet to internal bus or internal power or power supply (exc. supply) to RUN contact output to FE  
**Calendar clock:** Year (4 digits), month, date, day, hour, minute, second  
**Status indicator LED:** POWER, LOGGING, SD CARD, SEND, COM, ERROR  
**RUN contact output**\*1: Photo MOSFET relay (no polarity); (OFF in error detected)  
\*1. Run contact output is applicable for Type C with the DL8 firmware version 1.4.x or later.

ETHERNET COMMUNICATION

**Communication Standard:** IEEE 802.3u  
**Transmission:** 10BASE-T, 100BASE-TX  
**Baud rate:** 10/100 Mbps (Auto Negotiation function)  
**Protocol:** TCP/IP, Modbus/TCP, SLMP, HTTP, HTTPS, FTP, FTPS, SMTP, SNTP  
**Transmission media:** 10BASE-T (STP, Category 5), 100BASE-TX (STP, Category 5e)  
**Max. length of fieldbus segment:** 100 meters  
**Ethernet indicator LED:** DPLX, LNK  
**IP address:** 192.168.0.1 (factory setting)

INSTALLATION

**Power input:** 24 V DC  
**Power consumption:** Approx. 12 W 24 V DC @ internal power max. current 1.6 A  
Approx. 2 W (at single mounting)  
**Internal power supply** (power supply for I/O module): 5 V DC, 1.6 A  
**Excitation supply output** (excitation for I/O module): 24 V DC ±10 %, operational current 7 A  
(From power supply (excitation supply) connector, via connector for internal bus, supplied to each I/O module. Power output current consumption must be under operational current.)  
**Operating temperature:** -10 to +55°C (14 to 131°F)  
**Operating humidity:** 30 to 90 %RH (non-condensing)  
**Atmosphere:** No corrosive gas or heavy dust  
**Mounting:** DIN rail  
**Weight:** 190 g (0.42 lb)

PERFORMANCE

**Battery:** Vanadium-lithium secondary battery (undetachable)  
**Calendar clock accuracy:** Monthly deviation 2 minutes at 25°C  
**Battery backup:** Approx. 2 months  
**Insulation resistance:** ≥ 100 MΩ with 500 V DC  
**Dielectric strength:** 1500 V AC @ 1 minute (Ethernet to internal bus or internal power or power supply (exc. supply) to RUN contact output to FE)

COMPATIBLE BROWSING DEVICE

- Software requirement  
Functional checked environment
- PC
    - OS: Windows 10 (32-bit/64-bit), Windows 11
    - Browser: Microsoft Edge, Chrome, Firefox
  - Tablet
    - OS: iPad (iPadOS 17.5.1); Android terminal (Android 14)
    - Browser: iOS: Safari; Android: Chrome
  - Smart phone
    - OS: iPhone (iOS 17.5.1); Android terminal (Android 14)
    - Browser: (iOS) Safari; (Android) Chrome

COMMUNICATION

**IP:** DHCP client is supported. Manual setting of IP address, subnet mask, default gateway and DNS server available too.  
**Modbus/TCP slave:** Remote observation system via SCADA etc. Number of connections 4  
**Modbus/TCP master:** I/O expansion with remote I/O, e.g. R3 or R7 series, is available. Measuring points in multiple locations can be handled collectively.  
**SLMP Client:** DL8 allows I/O expansion by connecting with the SLMP-compatible CPU unit of Mitsubishi programmable-controller MELSEC; and collectively handles data from measuring points in multiple locations.  
**Web server function (Direct):** This unit can be a Web server, and 'Data,' 'Trend' and 'Event Log' views are available from remote location.  
**Web server function (Cloud):** This unit can be an FTP client, and upload the Web files to a cloud server. Users can browse the cloud server. Multiple users can access it at once without extra load at the unit. (only browsing, operation not available.)

**Analog input:** 32 points  
**Discrete input:** 64 points  
**Pulse input:** 32 points  
**Discrete output:** 64 points  
**Analog output:** 32 points  
(firmware version of the unit: 1.4.x or later)  
(For pulse input, only 32 bit data is available. It is not available for the products using 16 bit data (model: R3-PA16 etc.).

ALARM OUTPUT

Event can trigger an alarm contact at a discrete output module.

- Transition of analog input zone
- Transition of pulse input zone
- Status change of discrete input
- Count up of discrete input

EVENT REPORTING

Reporting email function available at event or designated time. Encrypted communication is supported. (SMTP over SSL). The DL8 turns a designated Do ON after transmitting the report.

- Number of email attention: 32
- Number of event report text: 32
- Number of regular report text: 1
- Channel status: AI, DI, PI, DO, AO status attachable to email (DO and AO are available with firmware version of the unit 1.4.x or later)
- Output at transmitting failure: 1 point

LOGGING

Log files in text format are stored into an SD card. The number of logs depends on the free space of the SD card.

- Log file: System log, event log, email report log, channel log

FTP CLIENT

The recorded data is uploaded to an FTP server and FTPS server (Type E) in CSV format in specified interval time. User can define the CSV file.

- Number of channel: Max. 32 (Selectable within AI, DI, DI (counter), PI, DO, AO) (AO is selectable with firmware version of the unit 1.4.x or later)
- Sampling rate (Firmware version 1.6.x or later) 1 or 2 sec (Interval time: 1 or 10 min. or 1 hr.) 5, 10 or 30 sec. (Interval time: 10 min. or 1 hr.) 1, 2, 5, 10, 15, 20 or 30 min. (Interval time: 1 day)
- Sampling rate (Firmware version 1.2.x or later) 1 or 2 sec (Interval time: 1 or 10 min. or 1 hr.) 5, 10 or 30 sec. (Interval time: 10 min. or 1 hr.) 1, 2, 5, 10 or 30 min. (Interval time: 1 day)
- Sampling rate (Firmware version 1.1.x or earlier) 1, 2, 5, 10 or 30 sec. (Interval time: 1 hr.) 1, 2, 5, 10 or 30 min. (Interval time: 1 day)

To confirm the firmware version, use the configurator software, model: DLCFG. Event can trigger an alarm contact at a discrete output module.

TREND DATA STORING

The logged data is written into the SD card in CSV format. User can define the CSV file.

- Number of channels: Max. 32 (Selectable within AI, DI, DI (counter), PI, DO, AO) (DO and AO are selectable with firmware version of the unit 1.4.x or later)
- AI sampling: Momentary, average, peak (max.), peak (min.)
- Logging rate: Second: 1, 2, 5, 10, 20, 30 sec. Minute: 1, 2, 5, 10, 15, 20, 30 min. (15 min. is selectable with firmware version 1.5.x or later) On the hour: 0 to 23 o'clock (1 or more times available; specify time delay for each set time) Day start time and days to log are available.
- Recordable up to the SD card size. Automatically deleted. (Auto delete is available with firmware version of the unit 1.4.x or later)
- Recording period (as a guide): Approx. 180 days (logging rate: 1 sec, 32 channels, only trend storing)

FTP SERVER

Reading and deleting files in the SD card by an FTP client and an FTPS client (Type E) are available.

- Compatible FTP client
- FFFTP 5.6
- Compatible FTPS client
- FFFTP 5.6

I/O MAPPING

Multiplex Data Transmission for remote I/O and IP telemeter is available by registering DI-to-DO or AI-to-AO mapping information.

USER DEFINED BROWSER VIEW

The browser view is user-definable. Development tools for HTML file are not available by us. Provide by customer.

WEB DATA LOGGER DL8 SERIES

WEB DATA LOGGER DL8 Series

Web-Enabled Remote Terminal Unit for Monitoring, Event Reporting and Data Logging



Web-Enabled Remote Terminal Unit for Monitoring, Event Reporting and Data Logging

DL8 Series Web Data Logger



MG CO., LTD.  
www.mgco.jp

Make Greener automation



MG CO., LTD.  
www.mgco.jp

Your local representative:






## Remote Monitoring System With High Cost Performance Accessible from Your Smartphone Anywhere through Internet



### DL8 DEMO SITE

Browse trend and data monitor windows of the DL8 on our web site.

URL [www.mgco.jp/english/products/weblogger/dl8\\_7.html](http://www.mgco.jp/english/products/weblogger/dl8_7.html)

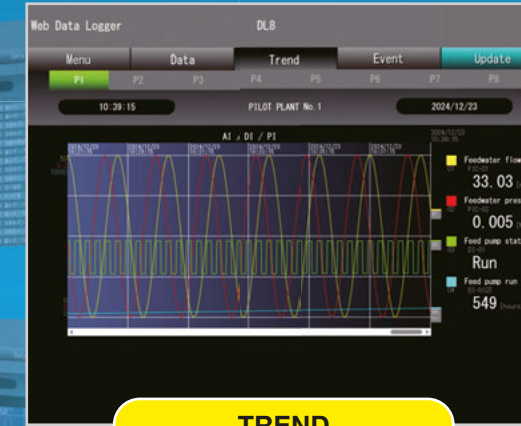


**EVENT LOG**

Time	Ch	Name	Comment	Event/Status	Signal
2024/12/23 10:43:46	A101	Feedwater flow	PIG-01	9999 counts	OK
2024/12/23 10:43:52	P101	Feedwater flow	PIG-01	9999 counts	OK
2024/12/23 10:43:56	A102	Feedwater pressure	PIG-02	9999 counts	OK
2024/12/23 10:43:58	P104	Energy consumption	MO-04	Demand Alarm	OK
2024/12/23 10:44:00	A103	Tank water level	LIC-03	Tank empty	OK
2024/12/23 10:44:05	A101	Feedwater flow	PIG-01	9999 counts	OK
2024/12/23 10:44:06	A102	Feedwater pressure	PIG-02	9999 counts	OK
2024/12/23 10:44:09	P104	Energy consumption	MO-04	Demand Alarm	OK
2024/12/23 10:44:10	P101	Feedwater flow	PIG-01	9999 counts	OK
2024/12/23 10:44:15	A103	Tank water level	LIC-03	Demand Alarm	OK
2024/12/23 10:44:30	A101	Feedwater flow	PIG-01	9999 counts	OK
2024/12/23 10:44:35	A102	Feedwater pressure	PIG-02	9999 counts	OK
2024/12/23 10:44:45	A103	Tank water level	LIC-03	Tank empty	OK
2024/12/23 10:44:50	A101	Feedwater flow	PIG-01	9999 counts	OK
2024/12/23 10:44:55	A102	Feedwater pressure	PIG-02	9999 counts	OK
2024/12/23 10:45:00	A103	Tank water level	LIC-03	Tank empty	OK

**DATA**

Ch	Name	Comment	Status	Signal	Value	Unit
0001	Feed pump control	DO-01	ON	Signal	10	ON/OFF
0002	Discharge pump control	DO-02	ON	Signal	10	ON/OFF
0003	Intake pump control	DO-03	ON	Signal	10	ON/OFF
0004	Exhaust pump control	DO-04	ON	Signal	10	ON/OFF
0005	DO1	DO1	Alarm OFF	Alarm	10	ON/OFF
0006	DO2	DO2	Alarm ON	Alarm	10	ON/OFF
0007	DO3	DO3	Alarm OFF	Alarm	10	ON/OFF
0008	DO4	DO4	Alarm ON	Alarm	10	ON/OFF
0009	DO5	DO5	Alarm OFF	Alarm	10	ON/OFF

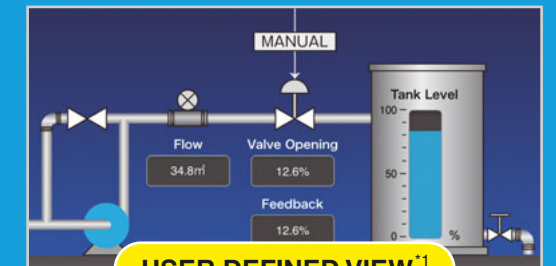

**DATA LOGGING**



**EMAIL**

<sup>\*1</sup> User Defined View is an optional feature available with the DL8-D and -E.

### Pre-installed user-friendly browser views for smartphones

'Data,' 'Trend' and 'Event Log' views are ready for monitoring purpose. Each one is basic but useful, designed for ease of browsing on smartphones and tablets. No additional application program is needed, just have your mobile terminal with internet browser.

### Browse, Report and Log

Five types of DL8 are available: Type A for 'Browsing' function with an internet browser; Type B added with 'Reporting' function by emails; Type C added with 'Logging' function with an SD card memory, Type D added with 'I/O Mapping' over Modbus/TCP network, and Type E added with 'Advanced Communication' function supporting SLMP client and secure communications.


### Flexible I/O signal types and scalable points

The DL8 is composed of an RTU module plus dedicated I/O modules for **analog I/O**, **status (discrete) I/O** and **pulse I/O** which can be used in free combinations to meet exact users' needs of I/O types and number of points.

The minimum configuration consists of two analog inputs or four discrete inputs, while the maximum consists of 32 analog inputs 32 analog outputs, plus 64 discrete inputs, 64 discrete outputs and 32 pulse count inputs.

### Enjoy modern communication infrastructure

Various network protocols are usable: **TCP/IP**, **SLMP client**, **SMTP client**, **SNTP client**, **HTTP/HTTPS server**, **FTP/FTPS client and server**, **Modbus/TCP master and slave**. The latest communication infrastructure such as optical, ADSL, CATV broadband, high-speed mobile communications and WLAN networks.

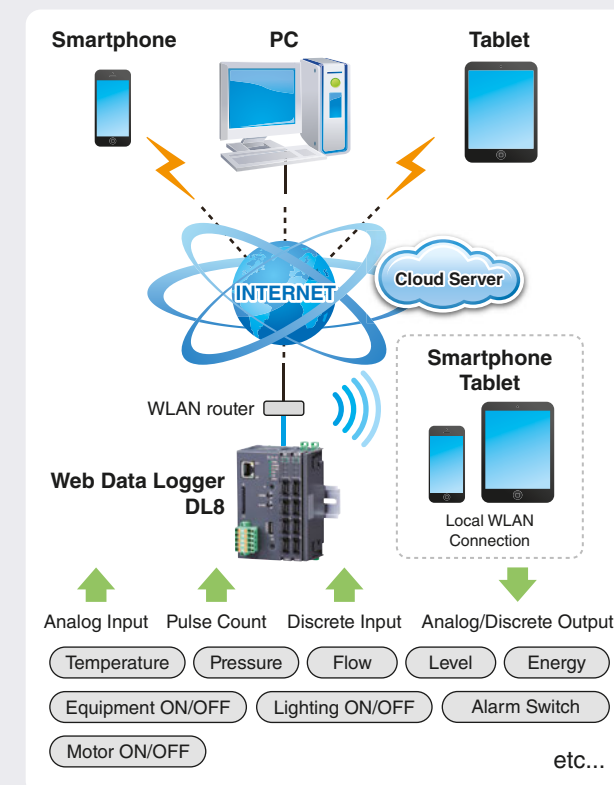

The DL8 may be used in monitoring applications which you thought were unable to meet your cost requirements.

- |  |  |
|--|--|
| <input checked="" type="checkbox"/> Construction machine | <input checked="" type="checkbox"/> Large equipment  |
| <input checked="" type="checkbox"/> Convenience store    | <input checked="" type="checkbox"/> Greenhouse       |
| <input checked="" type="checkbox"/> Elevated water tank  | <input checked="" type="checkbox"/> Electric furnace |
| <input checked="" type="checkbox"/> Reservoir pond       | <input checked="" type="checkbox"/> Winery/Brewery   |
| <input checked="" type="checkbox"/> Building             |  |
- Construction Machine

Convenience Store

Greenhouse
- Large Equipment


Winery/Brewery

Building

● Screen images for illustration purposes only. The actual web browser views are subject to change without notice.  
 ● Smartphones and/or telecommunication services are not our products.  
 ● "Cloud server" mentioned in this document includes both paid and free services.



Selectable Features at Minimum Cost

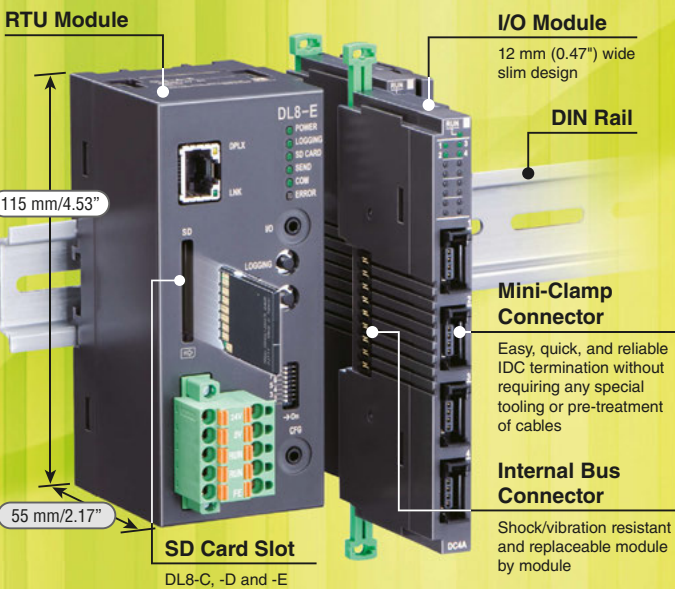

**RTU MODULE**

'Browsing,' 'Reporting,' 'Logging,' 'I/O Marshalling and Advanced View' and 'Advanced Communication' functions can be combined to suit your applications at the minimum cost.

**I/O MODULE (12-/24-mm wide)**


Economical slim I/O modules are selectable by signal types and number of points up to 16 modules. External Modbus/TCP slave modules can be also added.

RTU MODULE	Type	Featured Functions (See P.6)					Model
	A	Browse	—	—	—	—	DL8-A
	B	Browse	Report	—	—	—	DL8-B
	C	Browse	Report	Log	—	—	DL8-C
	D	Browse	Report	Log	I/O Marshalling Advanced View	—	DL8-D
	E	Browse	Report	Log	I/O Marshalling Advanced View	Advanced Communication	DL8-E

I/O MODULE	Signal Type	Max. Capacity*1 per module	Function	Model
	Analog input	32 points	DC current input (2 points, isolated) DC current input (4 points, non-isolated) DC current input (4 points, non-isolated, sensor exc.) DC current input (8 points, isolated, tension-clamp terminal block) DC voltage input (2 points, isolated) DC voltage input (4 points, non-isolated) Thermocouple input (2 points, isolated) RTD input (4 points, non-isolated) DC voltage/current input (4 points, non-isolated, sensor exc., tension-clamp terminal block) DC voltage/current input (16 points, non-isolated, sensor exc.)	R8-SS2 R8-SS4N R8-SS4NJ R8-SST8 R8-SV2 R8-SV4N R8-TS2 R8-RS4N R8-FST4N R8-FS16N
	Discrete input	64 points	Contact input (4 points, NPN) Contact input (16 points, NPN) Contact input (8 points, NPN, tension-clamp terminal block) Contact input (16 points, NPN, tension-clamp terminal block) Contact input (8 points, PNP, tension-clamp terminal block)	R8-DA4A R8-DAM16A R8-DAT8A2 R8-DAT16A2 R8-DAT8B2
	Pulse input	32 points	Totalized pulse input (4 points, NPN/PNP/voltage pulse) High-speed totalized pulse input (4 points, NPN)	R8-PA4 R8-PA4F
	AC power input	32 points	AC current input (4 points, non-isolated, clamp-on current sensor) DC voltage output (4 points, non-isolated)	R8-CT4E R8-YV4N
	Analog output	32 points	DC current output (4 points, non-isolated, tension-clamp terminal block) DC current output (2 points, non-isolated, sensor exc.) DC current output (2 points, isolated)	R8-YST4N R8-YS2NJ R8-YS2
	Discrete output	64 points	Transistor output (4 points, NPN, shortcircuit protection) Transistor output (4 points, NPN, voltage contact, shortcircuit protection) Photo MOSFET relay output (4 points) Relay output (4 points, tension-clamp terminal block) Transistor output (16 points, NPN, shortcircuit protection) Transistor output (16 points, NPN, shortcircuit protection, full interlock) Transistor output (16 points, NPN, shortcircuit protection, full and individual interlock) Transistor output (16 points, NPN, shortcircuit protection, full and partial interlock) Transistor output (32 points, PNP, shortcircuit protection) Transistor output (8 points, NPN, shortcircuit protection, tension-clamp terminal block) Transistor output (16 points, NPN, shortcircuit protection, tension-clamp terminal block) Transistor output (8 points, PNP shortcircuit protection, tension-clamp terminal block)	R8-DC4A R8-DC4A2 R8-DC4C R8-DCT4D R8-DCM16A R8-DCM16ALZ R8-DCM16ALK R8-DCM16ALH R8-DCM32B2 R8-DCT8A2 R8-DCT16A2 R8-DCT8B2
	Pulse output	32 points	Pulse output (4 points, open collector)	R8-PC4A
POWER SUPPLY				Model
Power supply module for extension				R8-PS1

\*1. Including extended remote I/Os

FUNCTIONS

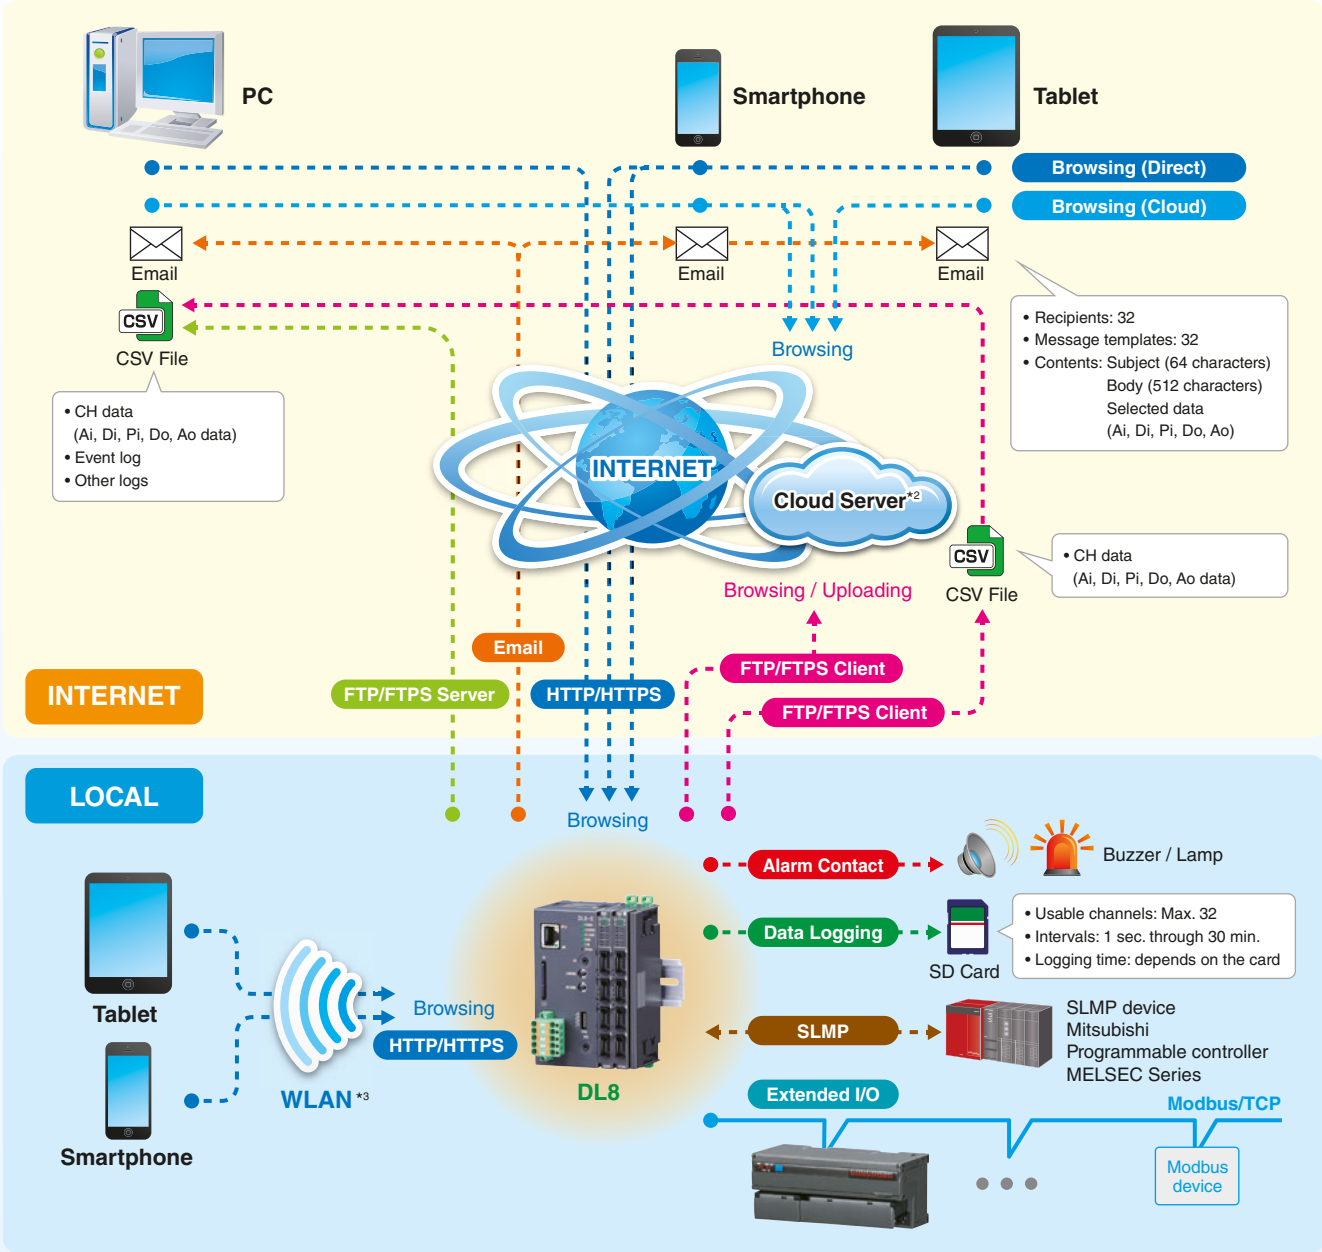

\*2. Cloud server services are not our products. \*3. A WLAN access point is required to use wireless LAN network.

ETHERNET/RS-485 ADAPTOR FOR MODBUS

Bidirectional protocol converter for Modbus/TCP (Ethernet) and Modbus RTU (RS-485)


Communication Adaptor GR8 Series

**Ethernet/RS-485 Adaptor (Modbus use)**

Model: GR8-EM

Can be coupled with the DL8 or the R8 Series Remote I/O modules, or installed independently.

I/O signals of RS-485 devices are connected to the DL8 via a hub/switch.

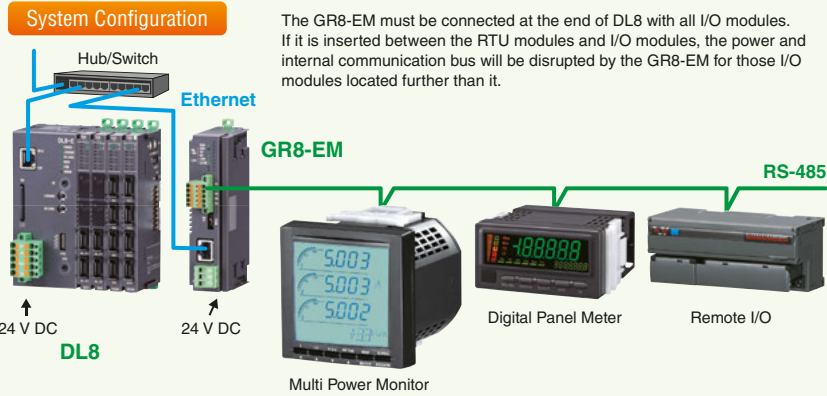


FUNCTIONS

Type					Function	Descriptions
A	B	C	D	E		
Y	Y	Y	Y	Y	Browse	<b>Browsing (Direct)</b> I/O signal status in the DL8 web server can be directly monitored with an internet browser.
						<b>Browsing (Cloud)</b> The DL8, operating as FTP client, uploads web use files to a cloud server. Multiple users can access it at once without extra load at the DL8.
						<b>Extended I/O</b> I/Os located within 500-meter distance can be collected and accessed via single DL8 module.
N	Y	Y	Y	Y	Report	<b>Email</b> Events can be reported by emails. Regular reporting and test mailing are also possible.
						<b>Alarm Contact</b> Event can trigger an alarm contact at a discrete output module.
						<b>FTP Client</b> Specific data can be converted into user defined CSV files and uploaded to an FTP server.
N	N	Y	Y	Y	Log	<b>Data Logging</b> Data is sampled and stored in CSV format in an SD card.
						<b>FTP Server</b> The host supervising system (client PC) can upload CSV data files from the DL8 operating as FTP server.
N	N	N	Y	Y	I/O Marshalling Advanced View	<b>I/O Mapping</b> Input at one I/O module can be output at another connected over Modbus/TCP network, by simply specifying combination of Di/Do and Ai/Ao.
						<b>User Defined View</b> User's own browser views can be added using JavaScript and the DL8 original HTML tags.
N	N	N	N	Y	Advanced Communication	<b>Encrypted Communication</b> Communications are encrypted by using HTTPS and FTPS protocols. Data can be handled securely.
						<b>SLMP Communication</b> The DL8 collects data from a PLC using SLMP client function.

Y = Function available. N = Not available.

Email Type B, C, D, E


Up to 32 mail recipients can be registered in the address list. Each of the regular and event reports can be sent to different recipients. The DL8 retries every 30 seconds up to 5 times if a mail is undelivered. It outputs an error contact to notify the failure if it is still undelivered after 5 retries.

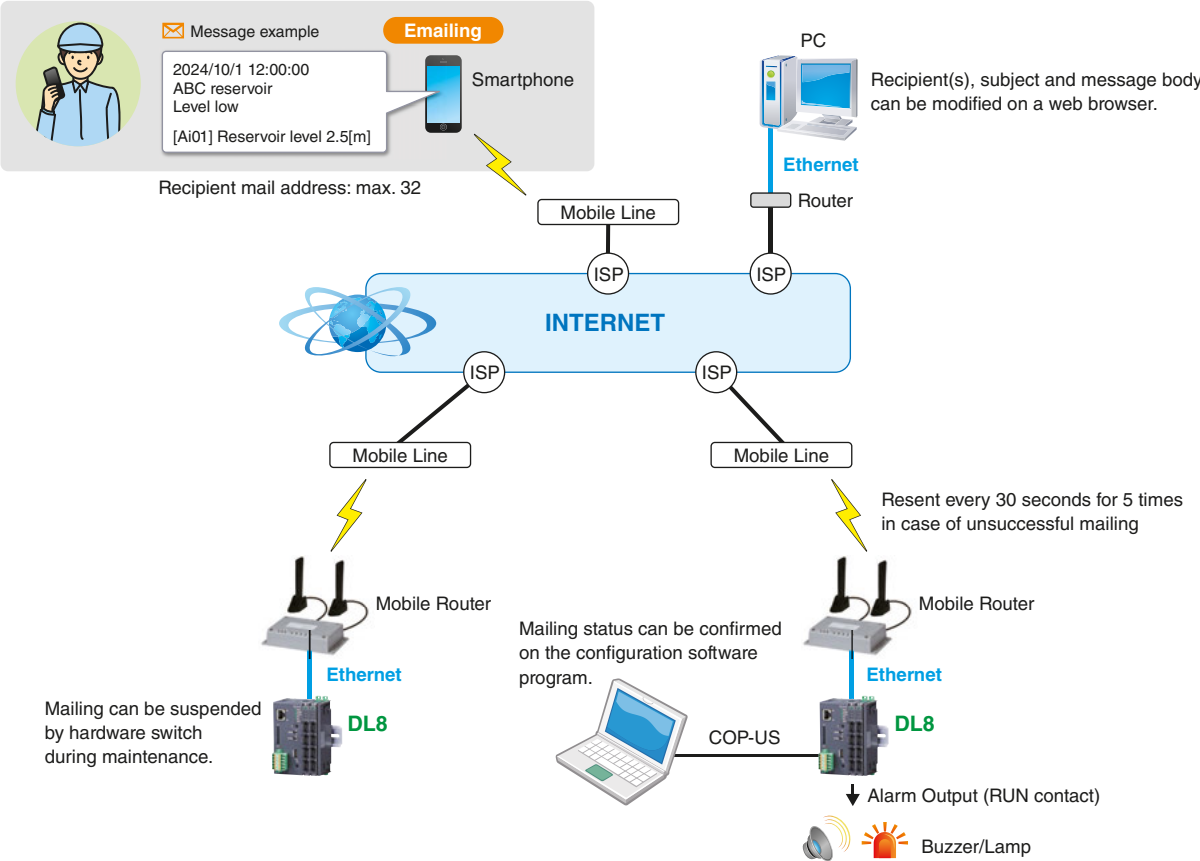

Modbus/TCP Master, Modbus/TCP Slave, SLMP Client


I/O signal sources can be extended to the max. 12 nodes of remote I/O and other devices via Modbus/TCP or SLMP communications. Users can monitor the I/O data on the data displays or trend graphs of the DL8. A SCADA can be used to supervise multiple DL8.

Modbus/TCP master and slave All types  
SLMP client Type E

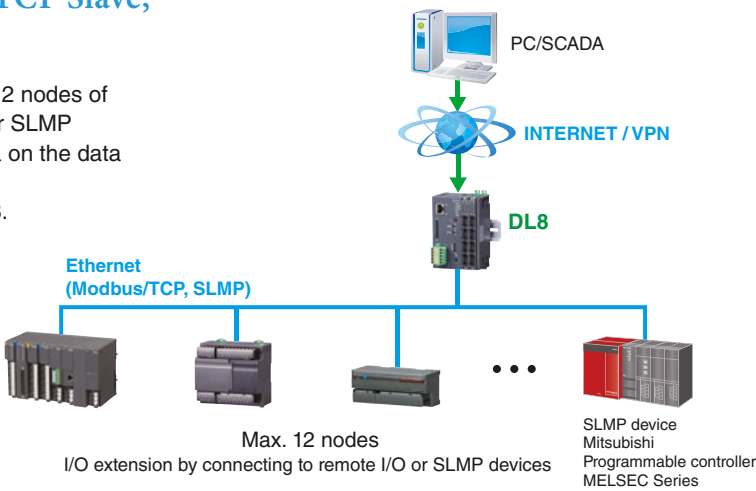

HTTPS Communication Type E


The DL8, type E, supports HTTPS protocol, encrypted version of HTTP. Encrypted data are securely exchanged via the internet, reducing risks of eavesdropping or falsification by cyber attacks. For HTTPS communication, a browser imports a server certificate generated by the software tool Local Certification Authority Creator (Model: LCA-DL8) and downloaded both to the DL8 and to the PC. The LCA-DL8 is downloadable for free at our web site.

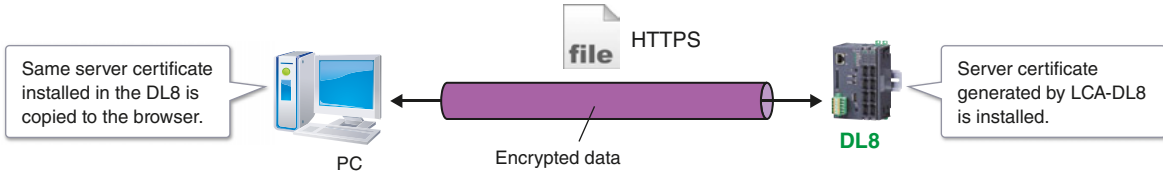

FTP Client and Server, FTPS Client and Server


CSV files recorded and stored in the DL8 can be transferred to a FTP server, while a FTP client can also upload the files stored in an SD card. To use the FTPS server function, the DL8 installs a server certificate generated by the software tool Local Certification Authority Creator (Model: LCA-DL8).

FTP client Type B, C, D, E  
FTP server Type C, D, E  
FTPS client Type E  
FTPS server Type E

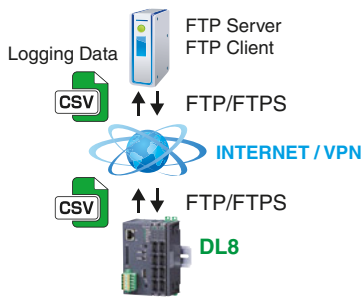

I/O Mapping Type D, E

The I/O mapping function realizes a simple and free marshalling of I/O signals at multiple locations on the LAN/WAN or VPN (Virtual Private Network) via IP (Internet Protocol) networks. Users can build an IP telemetering system to monitor remote field signals via the DL8.

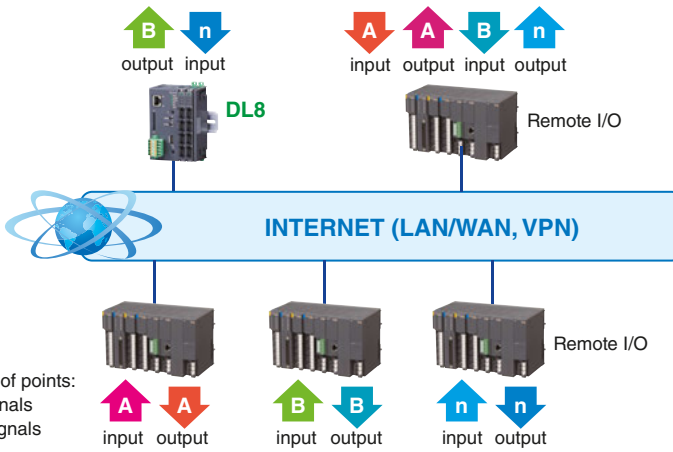



PRE-INSTALLED VIEWS

Smartphone / Tablet / Laptop PC  
Web Browsed Views Designed for Mobiles




Display Examples with iPhone or Android™

Trend view optimized for the aspect ratio of a smartphone screen


Display Examples with iPad

Event log view designed for ease of reading on the vertical screen of a tablet

PC SCREEN

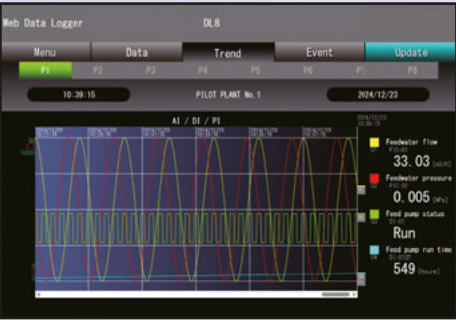

SMARTPHONE SCREEN

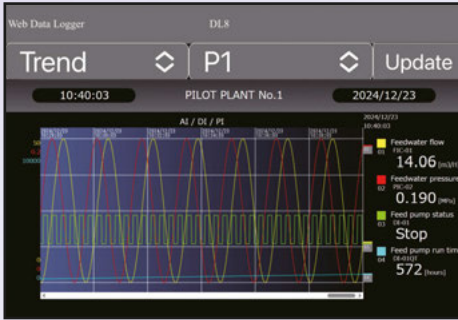


● iPhone and iPad are registered trademarks of Apple Inc. ● Android and Android logo are (registered) trademarks of Google LLC.  
● Screen images for illustration purposes only. The actual web browser views are subject to change without notice. ● Smartphones and/or telecommunication services are not our products.




Short trend and digital data displays are available to monitor analog, discrete and totalized pulse signals. Event log is also available to review alarm events. All the views can be quickly ready for use by simple setting.

TREND

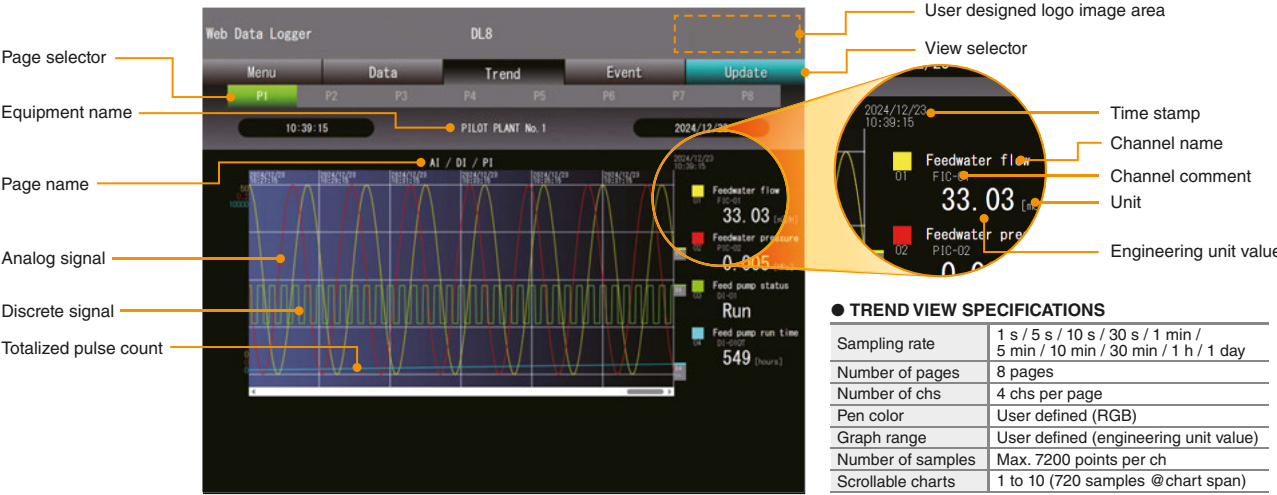

EVENT LOG

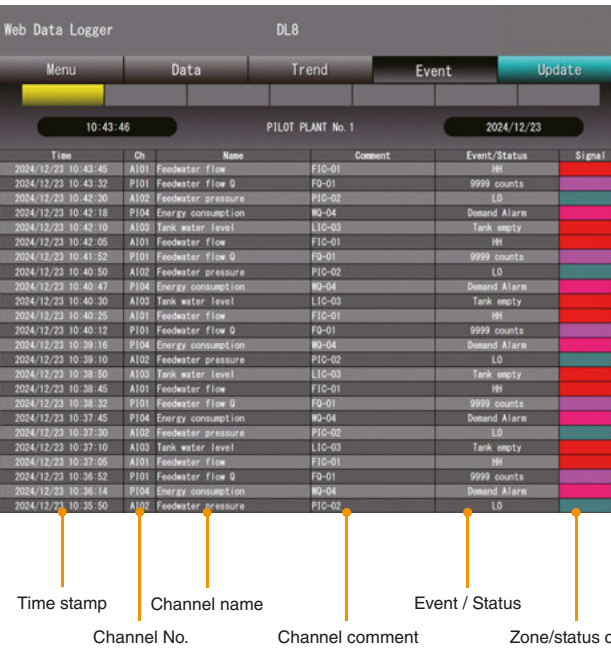


EVENT LOG SPECIFICATIONS

Analog signal	Alarm triggered when measured value passes across the setpoint.
Discrete signal	Alarm triggered when status changes.
Totalized count	Alarm triggered when pulse count exceeds the setpoint. (Counter can be reset.)
Pulse signal	Alarm triggered when measured value passes across the setpoint.


Emails can be sent when an event occurs. Specific recipients and texts can be defined for each event condition.

DATA


ANALOG INPUT DATA DISPLAY

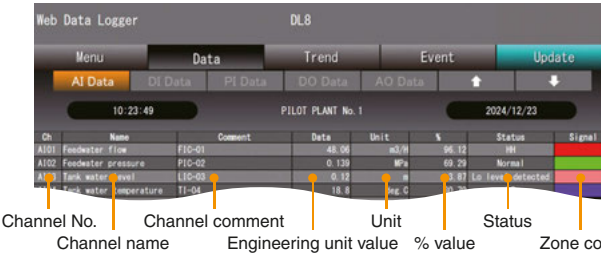


DISCRETE INPUT DATA DISPLAY

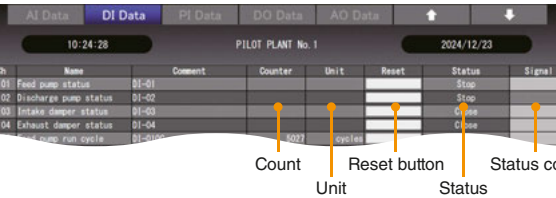


PULSE INPUT DATA DISPLAY

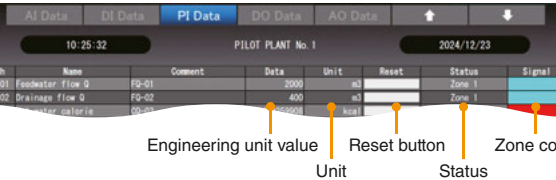

DISCRETE OUTPUT DATA DISPLAY

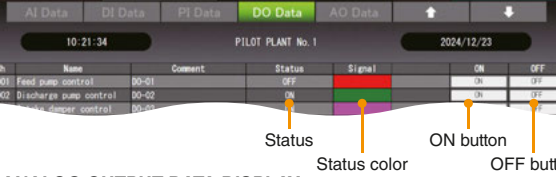

ANALOG OUTPUT DATA DISPLAY

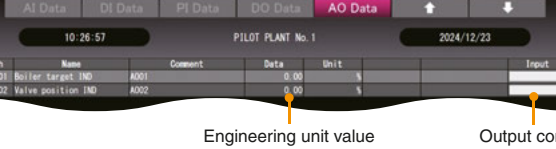



Customized Web Browser Views

DL8-D, -E OPTION

DATA VIEW  
BY HTML


Example using the  
DL8 original tags



● Composite Picture

GRAPHIC  
VIEW

Example using  
JavaScript

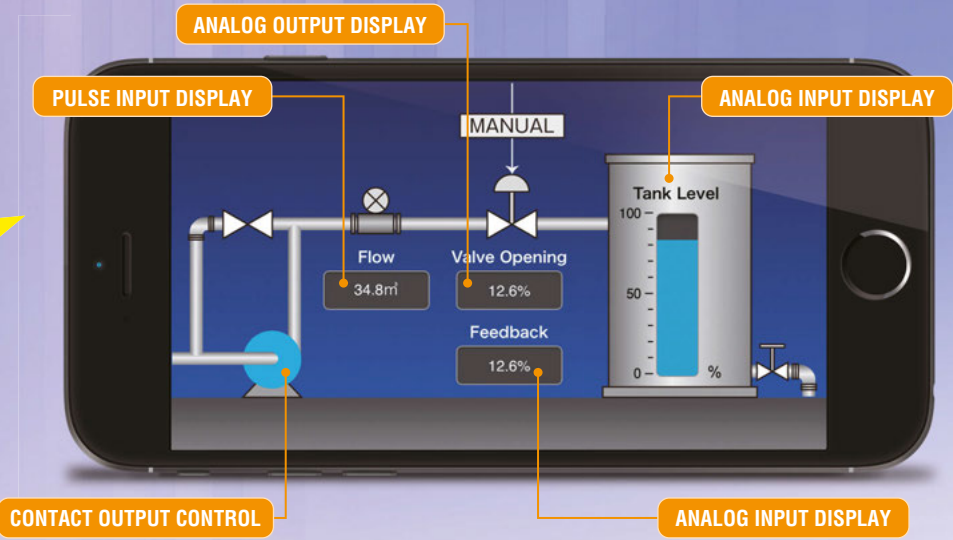


● Composite Picture


Creating User's Original Views by JavaScript or HTML

Measured data strings can be output as JavaScript arrays. Users who have knowledge and skills of JavaScript language, HTML and CSS used to build a web site can freely create original trend graphs, bargraphs and graphic views. Analog input, analog output, discrete input, discrete output, trend data, event data and other variety of array files are available.

Turning Pump ON/OFF

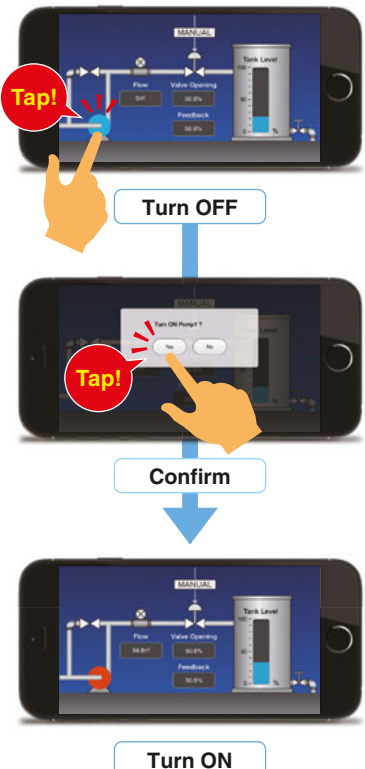

Setting Valve Opening

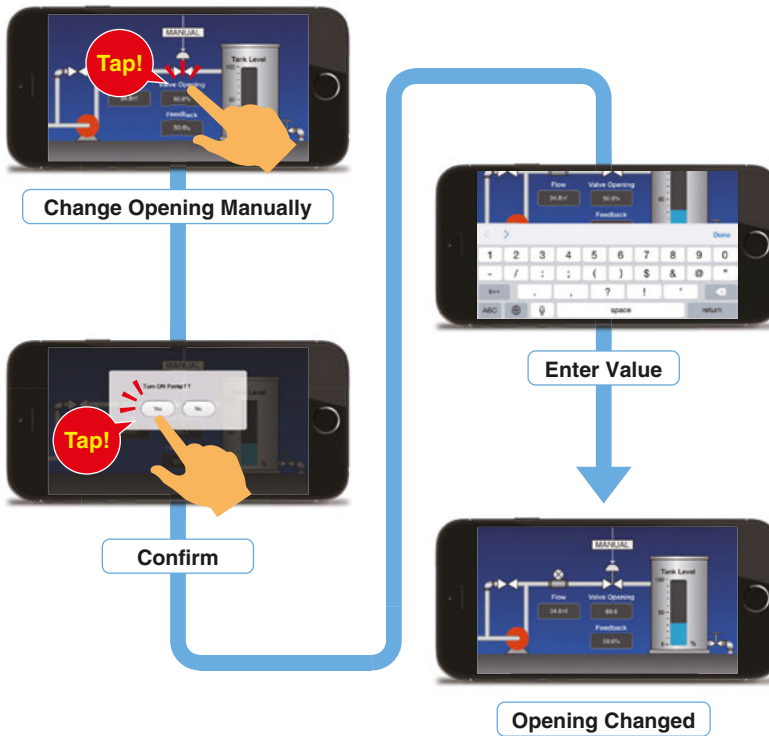

● Simulated Imagery. View samples are not provided.

JAVASCRIPT ARRAY FILES

FILE NAME DATA VARIABLE DEFINITION

dl\_header.js Present time

data\_ai.js

data\_di.js

Number of AI channels

Number of array elements in the following format de

AI Channel

AI CH name

AI CH comment

AI Engineering unit value

AI % value [% x 100]

AI Engineering unit

AI Zone name

AI Zone color

AI Channel No.

Number of DI channels

Enable/Disable DI control

(Number of array elements in the following format de

data\_ao.js

Number of AO channels

(Number of array elements in the following format descriptions equals the number of AO channels)

AO Channel

AO CH name

AO CH comment

AO Engineering unit value

AO Engineering unit

AO Channel No.

Enable/Disable AO control

AO Web control limit (lower)

AO Web control limit (upper)

Authorization level

auth\_level.js

Trend page name

Page name

Number of data samples

Trend speed

Year data string

Month data string

Day data string

ANALOG INPUT

DISCRETE INPUT

ANALOG OUTPUT

TREND DATA

USING THE DL8 ORIGINAL TAGS

The DL8 original tags in an HTML file are automatically converted into corresponding text/data string by the DL8. Users who do not have technical knowledge of programming scripts can easily create an original data view.




The DL8 User Defined View must be created and used under the user's sole responsibility, including its display components and functions.

ORIGINAL TAG	CONTENTS	CONVERTED TEXT/DATA STRING (example)
[NAME1]	Name 1	Web Data Logger
[NAME2]	Name 2	Web Data Logger
[NAME3]	Name 3	Web Data Logger
[TIME1]	Present Time	2024/10/1 11:00:00
[TIME2]	Not Used	----
[AI1_NAME]	Ai 1	CH name
[AI1_COMM]	Ai 1	CH comment
[AI1_DATA]	Ai 1	Engineering unit data
[AI1_DATA_P]	Ai 1	% data
[AI1_UNIT]	Ai 1	Engineering unit
[AI1_AREA]	Ai 1	Zone name
[DI1_NAME]	Di 1	CH name
[DO1_DATA]	Do 1	Status (display comment)
[AO1_NAME]	Ao 1	CH name
[AO1_COMM]	Ao 1	CH comment
[AO1_DATA]	Ao 1	Engineering unit data



SETUP

The DLCFG PC Configurator software is available to customize the views with the user specific information and various parameters. The user-friendly program is easy to use for anyone without special knowledge about network and software. The DLCFG can be downloaded for free of charge at our web site.

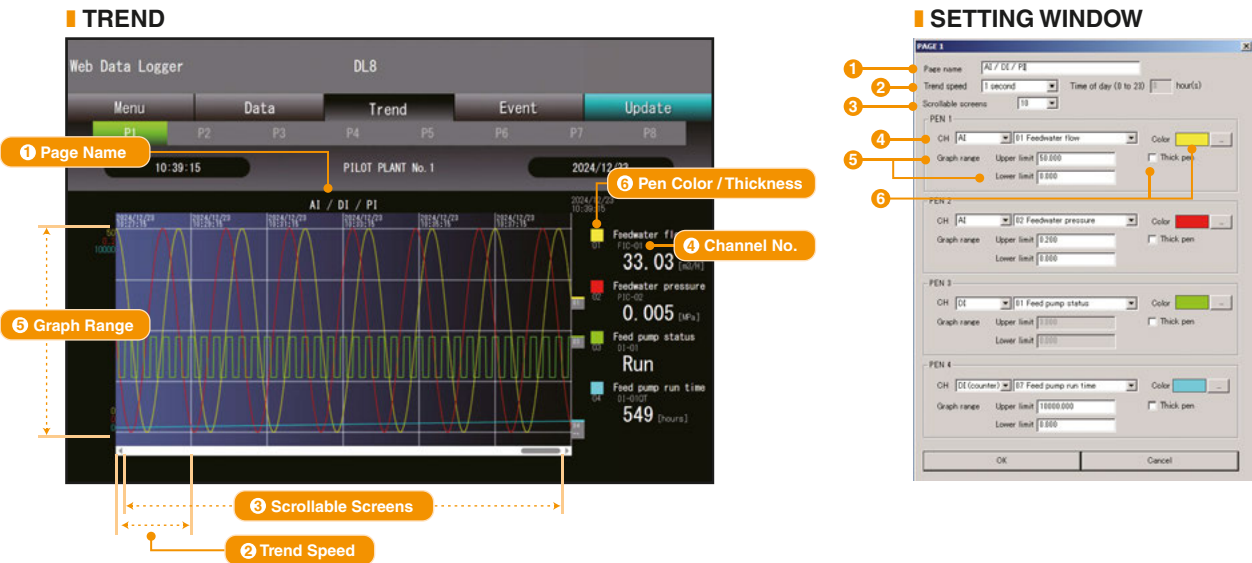

SETUP ITEMS

USER SETTING



SYSTEM	Name
	Time Zone
	Start Mode
INPUT/OUTPUT	Modbus/TCP Node
	Ai
	Di
	Pi
	Do
	Ao
COMMUNICATION	Web Server (HTTP/HTTPS)
	SNTP
	Modbus/TCP Slave
	SMTP/POP3
	SLMP
	FTP/FTPS Client
	FTP/FTPS Server
EMAIL	Address List
	Event Report
	Regular Report
	Delivery Failure Output
LOGGING	General
	Data Logging
	Channel Event Log
I/O MAPPING	Ao
	Do

MAINTENANCE SETTING

Date / Time
User Defined Imagery
MAC Address
DL8 Version
System Log
Preset Count
FTP Client Test
Test Mail
Start/Stop Logging
Disk Usage
User Defined Browser View
BIOS Update


HOW TO SET UP

SETUP SYSTEM CONFIGURATION

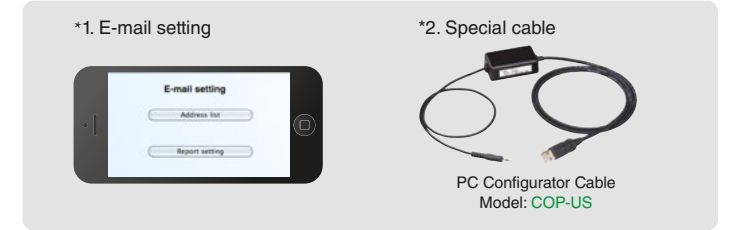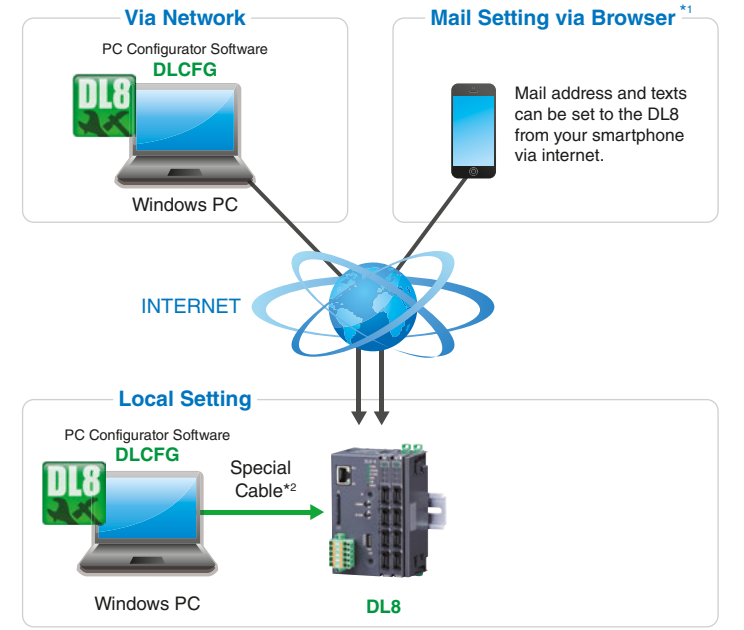


CONFIGURATIONS


INTERNET

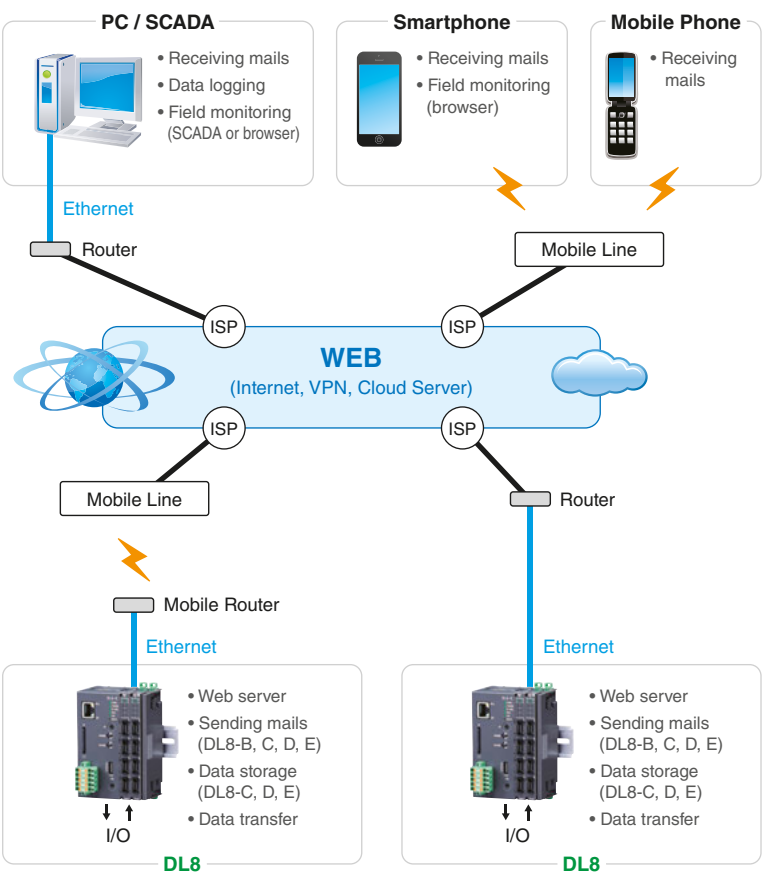


LAN

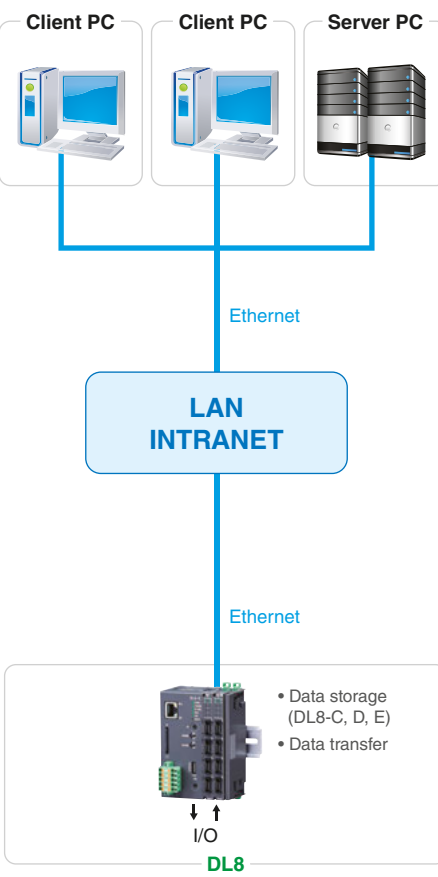

LOCAL WLAN

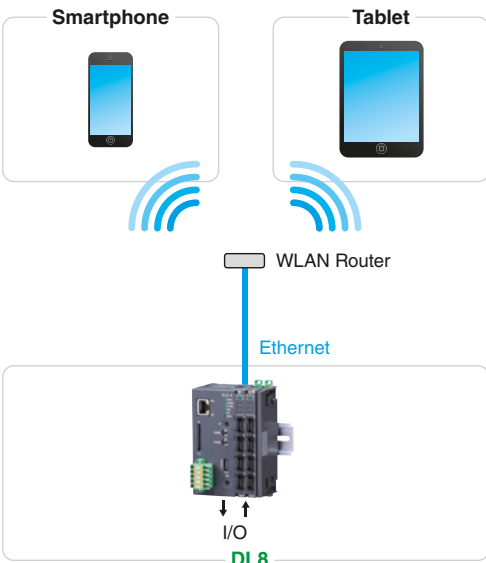

STAND-ALONE

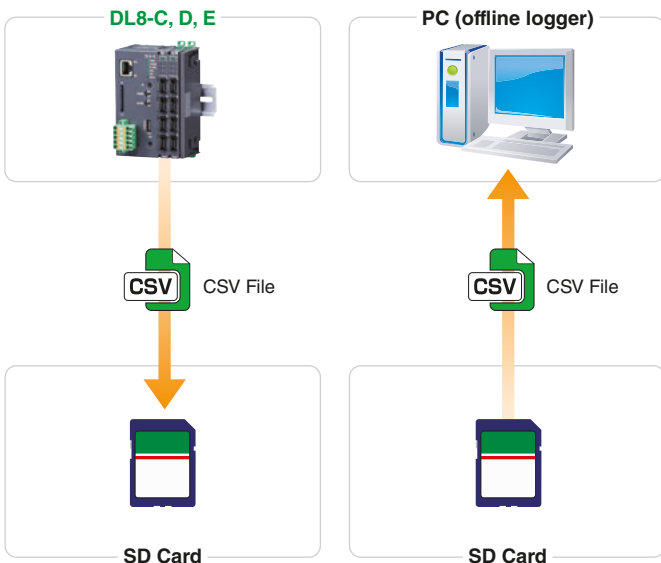

ISP : Internet Service Provider

About SD card (usable with DL8-C, D, E)  
An SD card is required to save data. Use one of the types specified in the data sheet.  
SD cards can be purchased from us. Contact us for more information.



# DL8 APPLICATION EXAMPLES

The DL8 web data logger is suitable for a wide variety of monitoring applications such as: construction machines, convenience stores, large equipment, elevated water tanks, wineries, breweries, electric furnaces, reservoir ponds, building, etc.

Web-Enabled Remote Terminal Unit for Monitoring, Event Reporting and Data Logging


Web Data Logger **DL8** Series



## CNG Gas Filling Stations

Also applicable to: Utility / Infrastructure Monitoring


- ✓ Material level monitoring
- ✓ Optimization of refilling schedule
- ✓ Effective service personnel assignment

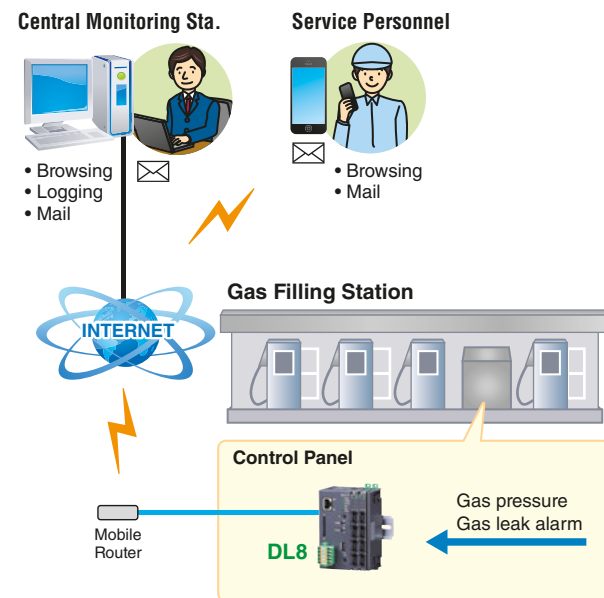

## Construction Machines

Also applicable to: Mobile Equipment


- ✓ Remote monitoring of mobile equipment
- ✓ Operation log for effective maintenance

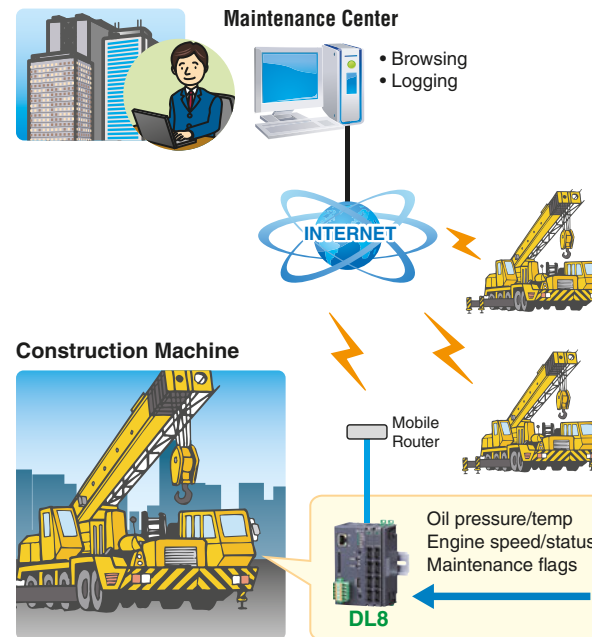

## Microbrewery

Also applicable to: Small Scale Fermentation Plants


- ✓ Remote monitoring
- ✓ Utilizing existing in-house LAN and email server
- ✓ Abnormality alert mail including update data

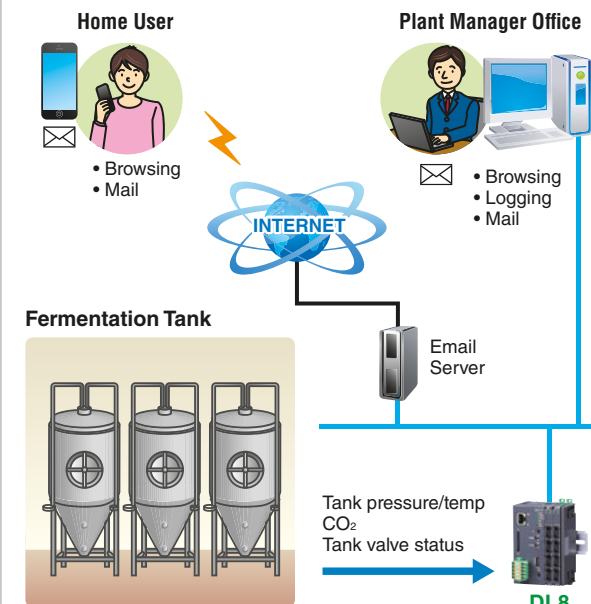

## Tank Farm

Also applicable to: Utility / Infrastructure Monitoring


- ✓ Wireless data monitoring for HART wireless transmitters
- ✓ Monitoring of material level and temperature

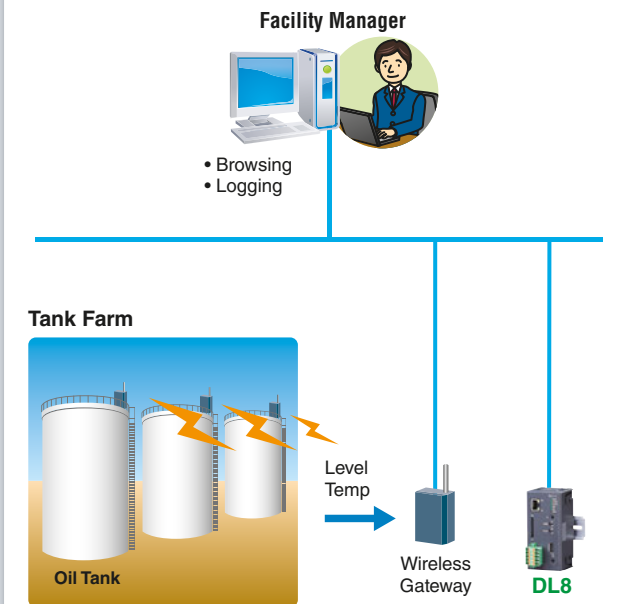

## Irrigation Canal Gate

Also applicable to: Utility / Infrastructure Monitoring


- ✓ Remote monitoring & control
- ✓ Alert mail to multiple users
- ✓ Web camera surveillance and telemetry via single fiber optics line

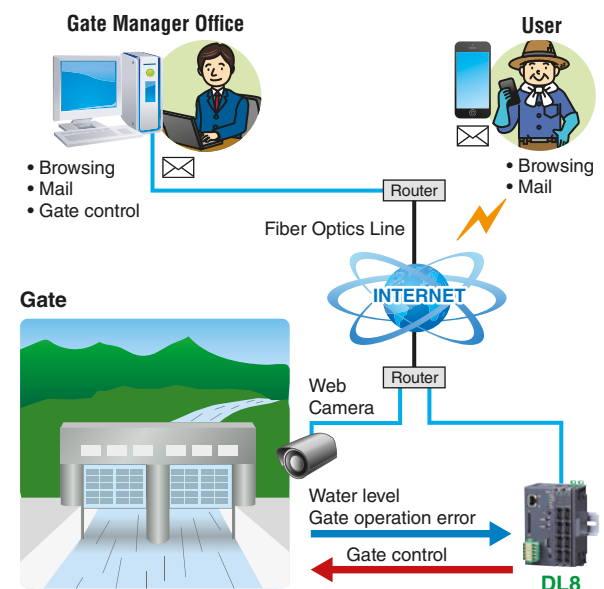

## Gas Cogeneration Generator

Also applicable to: Green Energy Plants


- ✓ Utilizing existing in-house LAN
- ✓ Alerting facility manager and maintenance company at once in case of trouble
- ✓ Operation log for effective maintenance

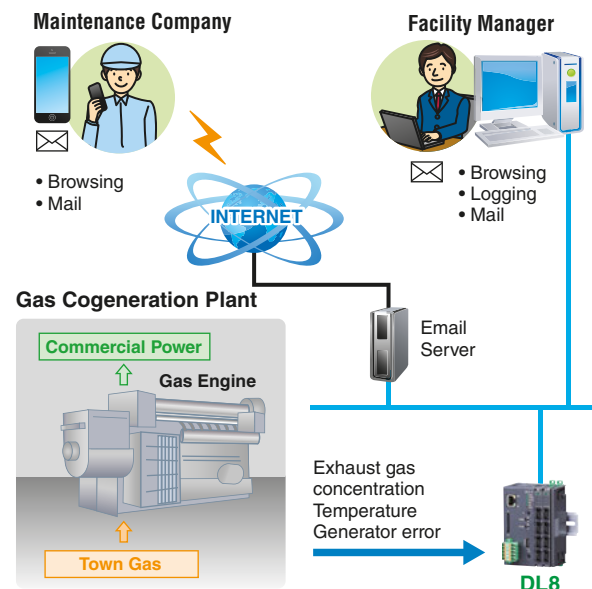

## Boiler Test Run Monitoring

Also applicable to: Machinery & Equipment Monitoring

- ✓ Combination of the DL8/mobile router needs only a minimum space, ideal for temporary installation for the startup
- ✓ Supervisor and field operators can double-check the data at once

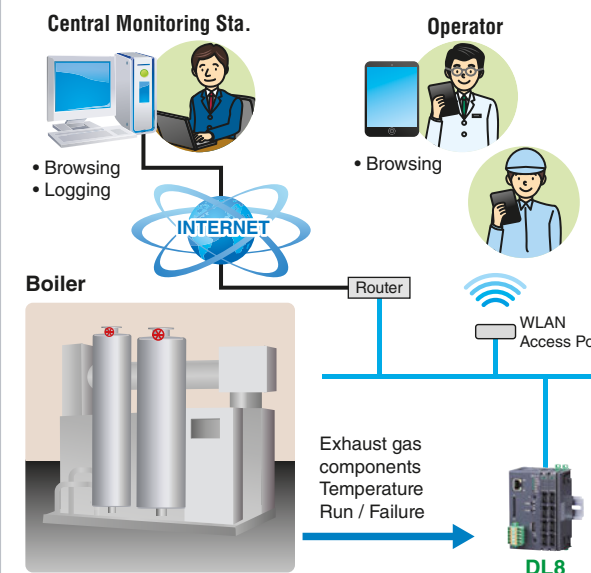

## Water Quality Analyzer

Also applicable to: Utility / Infrastructure Monitoring

- ✓ Water quality monitoring
- ✓ Effective service personnel assignment

