

MAIN SPECIFICATIONS

APPLICATION SOFTWARE

Model: PC Recorder
Downloadable from our website for free of charge
Operating system: Windows 11
Browser: Chrome, Edge, Firefox
Language: English / Japanese

COMMUNICATION

Media: USB
Number of connections: 1

GENERAL SPECIFICATIONS

Connection
Power input, communication: USB Type-C connector (female) (USB cable provided by user)
I/O: Tension clamp terminal
Isolation: Analog input to discrete input or output to USB connector (power input or communication)

ANALOG INPUT (Ai)

Input signal: DC voltage, 16 points (2 ranges by 8 points among wide span, middle span and narrow span specified when ordering)
Wide span voltage: ± 10 V DC to ± 0.8 V DC
Middle span voltage: ± 0.8 V DC to ± 80 mV DC
Narrow span voltage: ± 80 mV DC to ± 10 mV DC
Sampling rate: 100 ms

OPERATION INPUT (Oi)

Mathematical and other functions can be applied to analog input values using ratios and constants.
Function: Addition/Subtraction / Multiplication / Division / Extraction of square root / Moving average / First order lag / exp / Common logarithm / Natural logarithm / Peak hold (maximum) / Peak hold (minimum) / Power / Analog integration / F-value operation / Antilogarithm / Scaling / Time

DISCRETE INPUT (Di)

Common: Negative common (PNP) per 2 points
Rated detecting voltage: Approx. 5 V DC (internal supply)
Sampling rate: 100 ms

DISCRETE OUTPUT (Do)

Photo MOSFET relay: 2 points
Rated load voltage: 48 V peak AC/DC
Output timing: 100 ms

INSTALLATION

Current consumption: ≤ 120 mA
5 V DC power input by USB bus powered (high powered device)
Operating temperature: -10 to +55°C (14 to 131°F)
Storage temperature: -20 to +65°C (-4 to +149°F)
Operating humidity: 30 to 90 %RH (non-condensing)
Mounting: Desktop, surface or DIN rail (35 mm rail)
Weight: 150 g (0.33 lb)


PERFORMANCE

Conversion accuracy: ± 0.1 % (narrow span voltage input ± 20 mV DC: ± 0.2 %, ± 10 mV DC: ± 0.3 %)
Conversion rate: 4 msec.
Temp. coefficient: ± 0.015 % /°C (± 0.008 %/°F) (± 0.03 %/°C [± 0.02 %/°F] with ± 10 mV DC)
Insulation resistance: ≥ 100 M Ω with 500 V DC
Dielectric strength: 1500 V AC @1 minute (analog input to discrete input or output to USB connector (power input or communication))

STANDARDS & APPROVALS

EU conformity: EMC Directive
EMI EN 61000-6-4
EMS EN 61000-6-2

EXTERNAL DIMENSIONS unit: mm (inch)

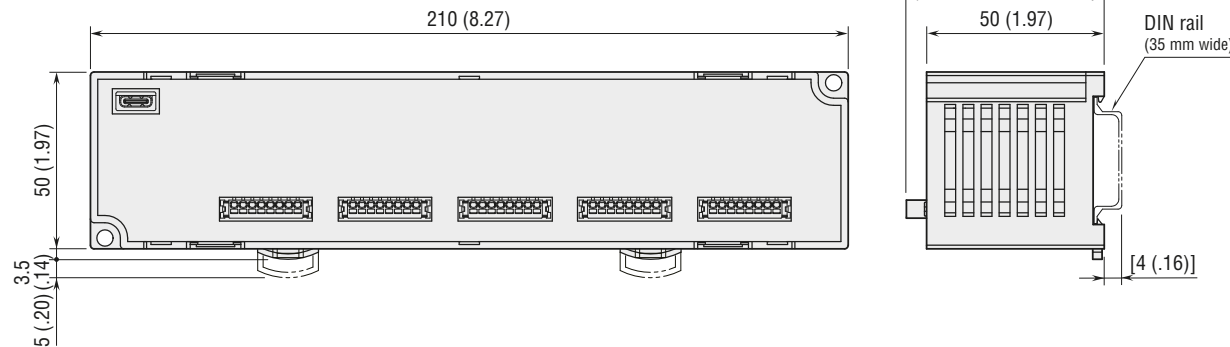

MG CO., LTD.
www.mgco.jp

Your local representative:

Paperless Recorder on the PC PC RECORDER

- USB Type-C bus powered: no external power supply needed
- Event-triggered recording
- Enhanced screens: Overview, Event View and Report File Display




PC Recorder
Model: R7K4GUS-G16D4

MG CO., LTD.
www.mgco.jp

Make Greener automation

No External Power Supply Needed!

Paperless Recorder that is as easy to use as a digital multimeter

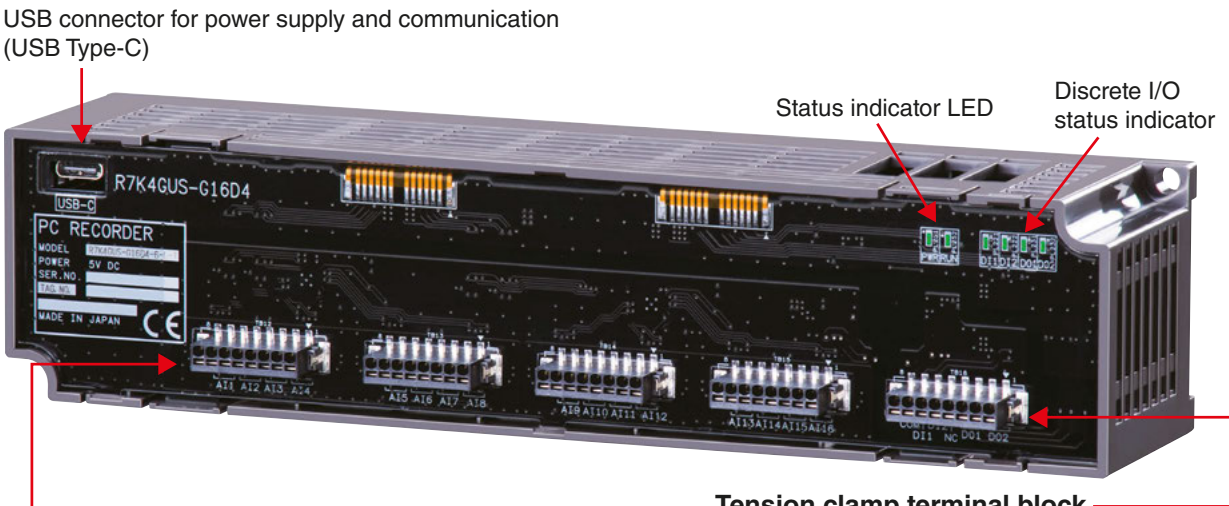


Analog input measuring range (16 points)
Measuring range is selected by every 8 points when ordering.

Three measuring ranges:

- Wide span range: ± 10 V DC to ± 0.8 V DC
- Middle span range: ± 0.8 V DC to ± 80 mV DC
- Narrow span range: ± 80 mV DC to ± 10 mV DC


PC Recorder

Model: R7K4GUS-G16D4

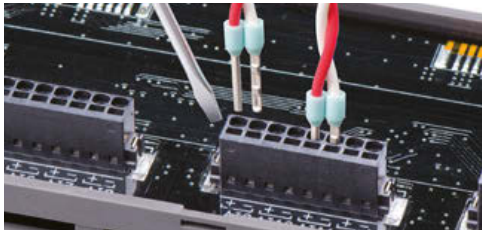

Easy-to-wire tension clamp terminals for I/O signals
Probes, alligator clips and other tools must be prepared by the user.

What You Need to Start Data Recording

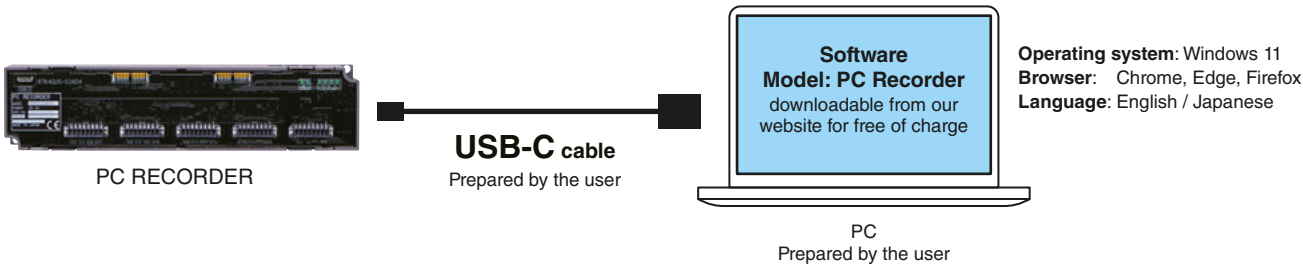

Application Examples




Enhanced Screens Beside the Trend Graph

The operability of PC Recorder follows that of the existing products of Web Data Logger and Tablet Recorder which have already been used and familiar to many users.

GRAPH Trend View

There are four trend graph pages, each of which contains 4 pens (16 pens in total). Each pen is assigned to any channel of all I/Os (Ai / Di / Oi / Do). Zone name, zone color, event comment, alarm output, delay timer, trigger recording and reset function value, can be specified to each analog input channel (Ai) and operation input channel (Oi).


Trend Display Functions

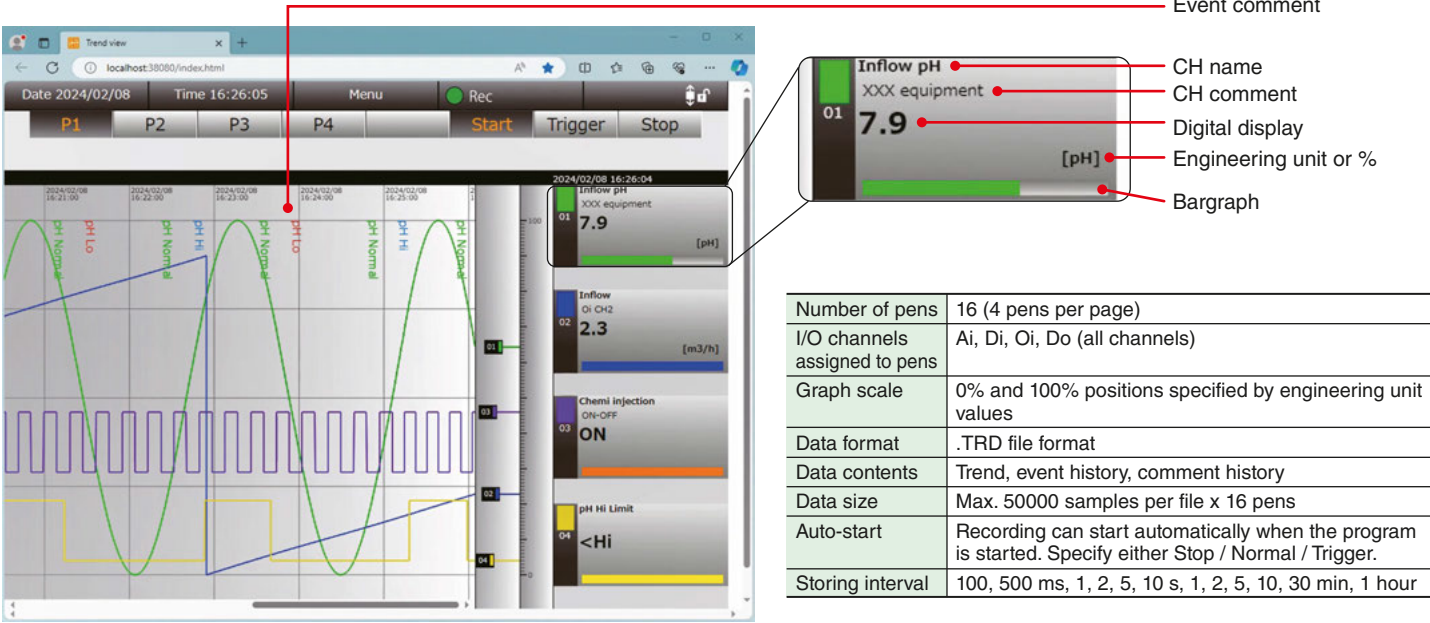

Trigger Recording

User can preset specific trigger conditions to certain analog/digital/operation channels, and choose how many data samples before and after an event condition is triggered, must be recorded. It is an effective way to save only the necessary data for failure monitoring and analysis.

Two operation modes are available: "Level" mode and "Edge" mode.

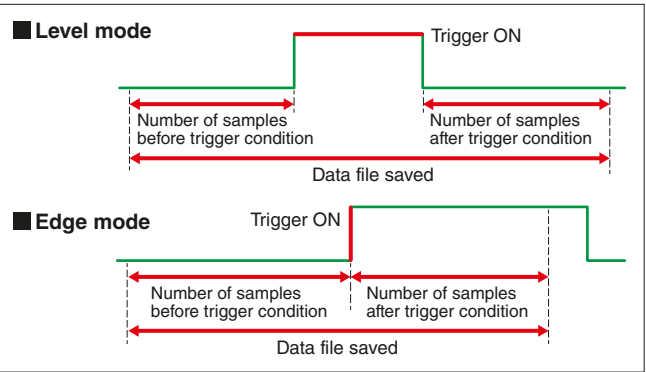


ALL CHANNELS Overview




All channels are updated and displayed on the overview screen. For analog input channels, engineering unit values and percent values are toggled by clicking over the display.

LATEST EVENTS Event View

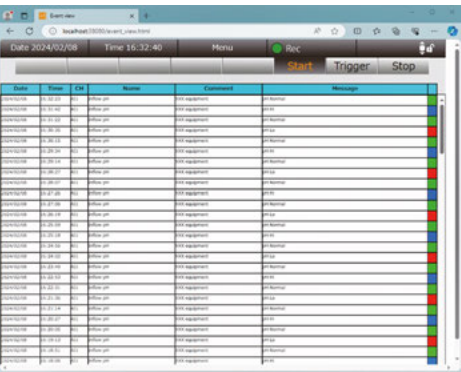

The latest 500 events, triggers, alarms are listed among the analog and operation input signal channels.

REPORT FORMS Report File

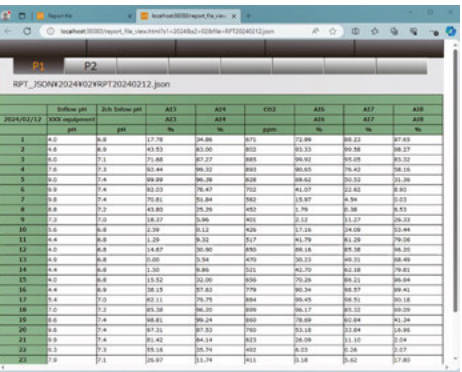

Report file data is generated every hour on the hour (1H data). Sampling method can be selected from momentary / average / maximum / minimum values.