

Model M3LDY Current Loop Supply

PC CONFIGURATOR SOFTWARE

Model: M3LDYCFG

USERS MANUAL

CONTENTS

1. GETTING STARTED	4
1.1. PC REQUIREMENTS.....	4
1.2. INSTALLING & DELETING THE PROGRAM	4
1.3. STARTING UP THE M3LDYCFG	5
1.4. OPTION /A & OPTION /B.....	5
2. MONITOR	6
2.1. STARTING UP	6
2.2. CONNECTING THE DEVICE.....	7
2.3. MONITORING TRENDS.....	8
2.3.1. DEVICE MODE.....	9
2.3.2. DEVICE STATUS	9
2.3.3. BARGRAPH & TREND GRAPH	10
3. CONFIGURATION.....	11
3.1. INPUT CONFIGURATION	11
3.2. DETAILED INFORMATION.....	12
3.2.1. LOU CUT FUNCTION.....	13
3.3. ANALOG OUTPUT	14
4. ONE STEP CALIBRATION	15
4.1. INPUT CALIBRATION MODE.....	16
4.2. OUTPUT CALIBRATION MODE.....	17
5. INPUT / OUTPUT CALIBRATION	18
5.1. DAC TRIMMING	18
5.1.1. LOWER RANGE DAC TRIMMING.....	18
5.1.2. UPPER RANGE DAC TRIMMING	18
5.1.3. RESETTING TO THE DEFAULT	18
5.2. SENSOR CALIBRATION	19
6. OFFLINE CONFIGURATION AND READ / WRITE FILES	20
6.1. LINEARIZATION TABLE	20
6.1.1. LINEARIZATION TABLE SETTING.....	20
6.1.2. SPECIAL CURVE	21
6.2. FILE MANAGEMENT	23
6.2.1. MODIFYING PARAMETERS	24
6.2.2. TRANSFERRING DATA TO/FROM DEVICE	25
6.2.3. READING/WRITING FILES.....	26
6.2.4. COMPARING FILE TO DEVICE.....	27
6.2.5. OPERATION EXAMPLE BY FILE MANAGEMENT	28

7. DIAGNOSTICS	30
8. LANGUAGE	31

1. GETTING STARTED

1.1. PC REQUIREMENTS

The following PC performance is required for adequate operation of the M3LDYCFG.


OS	Windows 10 (32-bit, 64-bit) Windows 11 (64-bit) The software may not operate adequately in certain conditions.
CPU/Memory	Must meet the relevant Windows' requirements.
Hard disk	10MB minimum free space
PC configurator cable	Model COP-US (USB) or MCN-CON (RS-232-C)

1.2. INSTALLING & DELETING THE PROGRAM

INSTALL

The program is provided as compressed archive. Decompress the archive and execute 'setup.msi' to start up the M3LDYCFG installer program. Follow instructions on the Windows.

In the M3LDYCFG installer program, all the software of the M3CFG series will be installed. If you would like to install only M3LDYCFG, change to "X" for other software in the window appeared during the installation as shown below.

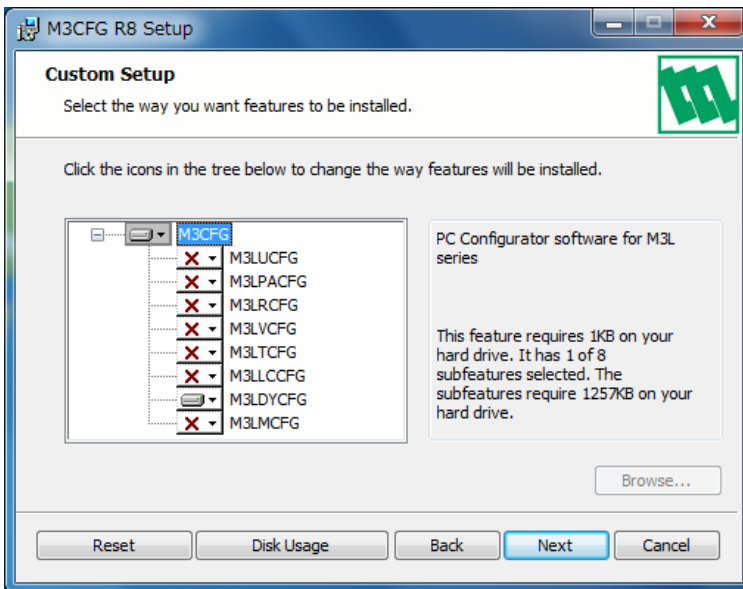

DELETE

Open Control Panel > Add/Remove Programs. Select the "M3CFG Rx" from the program list and click Delete button.

1.3. STARTING UP THE M3LDYCFG

Connect the model M3LDY Current Loop Supply to the PC via the PC configurator cable.

Press Start on the task bar and choose M3CFG > M3LDYCFG from the Program menu.

1.4. OPTION /A & OPTION /B

The M3LDY with Option /B is not designed for PC configuration but only for monitoring on the PC, while the Option /A version is fully programmable.

OPTION /B

When you connect the Option /B version to the PC and start up the M3LDYCFG program, you can confirm the current setting but these buttons and fields used for configuring the module are greyed out and thus unavailable.

The M3LDYCFG features available for the Option /B version are: monitoring, One Step Calibration, zero/span, loop test output and diagnostics.

OPTION /A

The Option /A version is fully programmable including the following: PV range, analog output, range and linearization table PV transfer function.

This version of the M3LDY can be programmed and calibrated even when the configuration mode switch (DIP switch SW2-8) is set to DIP SW mode, however, once the power supply to the M3LDY is turned off and on, it restarts based on DIP switch configurations. It must be started up with the SW2-8 turned on so that it reads its EEPROM contents regardless of other DIP switch configurations.


2. MONITOR

2.1. STARTING UP

Figure 1 shows the initial window of the M3LDYCFG PC Configurator window.

In order to enable the tools shown on the screen, the model M3LDY Current Loop Supply must be connected to the PC via the PC configurator cable.


Figure 1. Initial Window

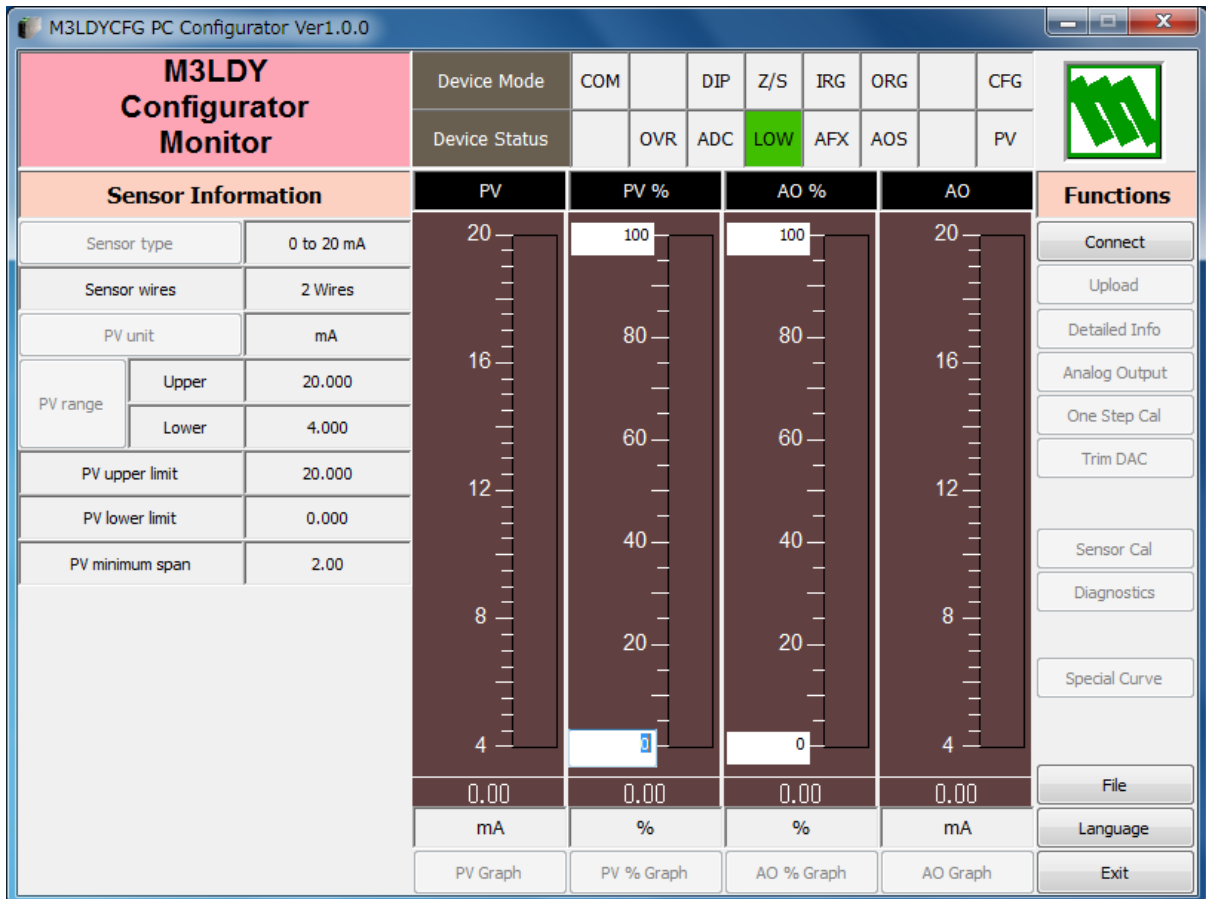

2.2. CONNECTING THE DEVICE

On the initial window, click [Connect] and the Device Connection menu appears on the screen.

Figure 2. Device Connection

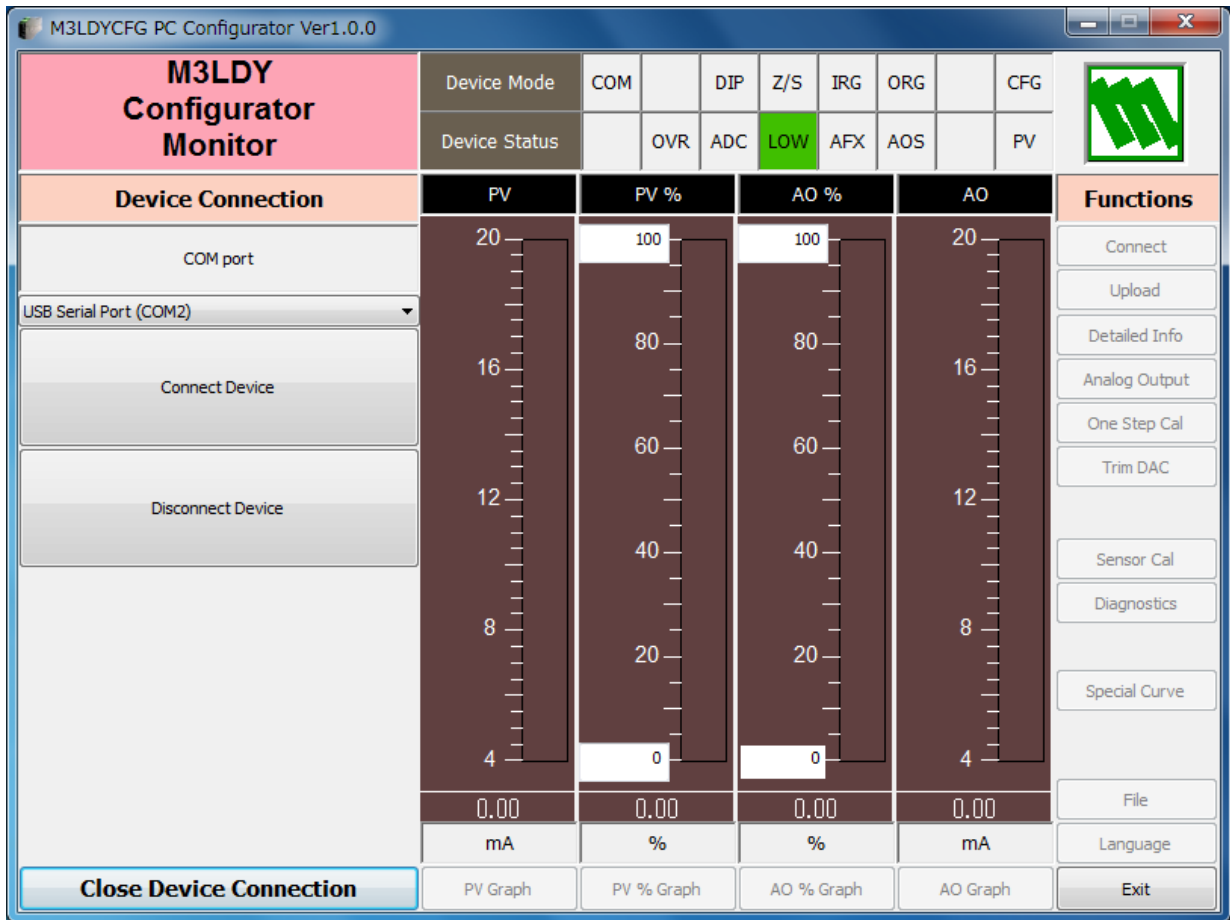


COM port	Choose an adequately configured COM port to be connected.
Connect Device	Connects the device. Once the connection is established, the program uploads the device's configuration information and automatically opens Sensor Information window. The window is the base for various operations to configure the M3LDY.
Disconnect Device	Disconnects the currently connected device.
Close Device Connection	Close the Device Connection window.

2.3. MONITORING TRENDS

Once the device is connected, the Sensor Information menu and the trend monitors appears on the screen. The user can configure various parameters of the M3LDY.

Use [Upload] button to re-load device information e.g. when you replace the module with a new one or when you make changes to M3LDY's configuration without using this tool.

Figure 3. Sensor Information

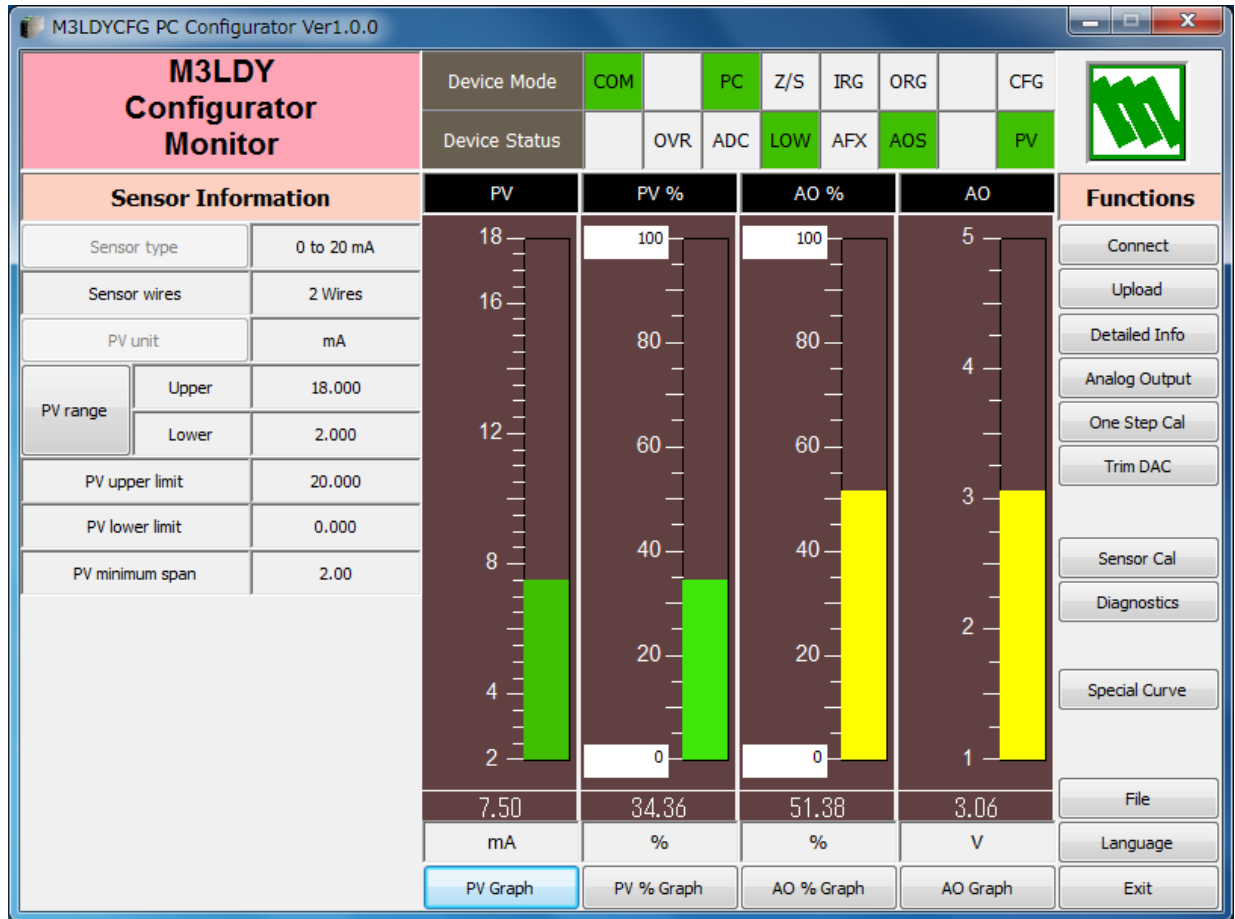

2.3.1. DEVICE MODE

Device Mode summarizes the device's current operation status and communications status with the PC by lamps.



or



[COM] lamp	Blinks with the normal communications condition.
[DIP]/[PC] lamp	Shows the device's configuration mode: DIP switch or PC. For the M3LDY version /B, only DIP switch mode is available.
[Z/S] lamp	Red light turns on when the device is in the DAC trimming mode.
[IRG] lamp	Red light turns on when the device is in the input one-step calibration mode.
[ORG] lamp	Red light turns on when the device is in the output one-step calibration mode.
[CFG] lamp	Red light turns on when data changes have been done on the configuration software since it was stored the last time. It turns off once the data has been stored into the nonvolatile memory.

2.3.2. DEVICE STATUS

Device Status summarizes the current device status by lamps.



[OVR] lamp	Red light turns on with 'Input error' detected (ADC overrange or underrange).
[ADC] lamp	Red light turns on with ADC's hardware errors.
[LOW] lamp	Yellow light turns on when Low cut function is enabled. Green light turns on when Low cut function is disabled.
[AFX] lamp	Red light turns on when the analog output entered in Fixed AO mode.
[AOS] lamp	Green light turns on when the analog output is diagnosed to be normal. Red light turns on when the output is saturated upscale or downscale.
[PV] lamp	Green light turns on when the sensor input is in the specified range. Red light turns on when it is out of the range.

2.3.3. BARGRAPH & TREND GRAPH

Four bargraphs indicating PV (mA), PV in % of the selected range, analog output in % and analog output in engineering unit are available.

The analog output % shows the result of the transfer function against the PV %. With LINEAR transfer function, the analog output % equals the PV %.

The graph scales for the PV in % and the analog output in % can be modified unlike the PV and the analog output in engineering unit of which the scales are automatically determined and fixed according to the selected range.

At the bottom of each bargraph is [Graph] button which opens a trend graph for the item. Use [Start] and [Stop] buttons to start/stop recording data, and click [Close Trend Graph] to close the graph window.

PV Bargraph


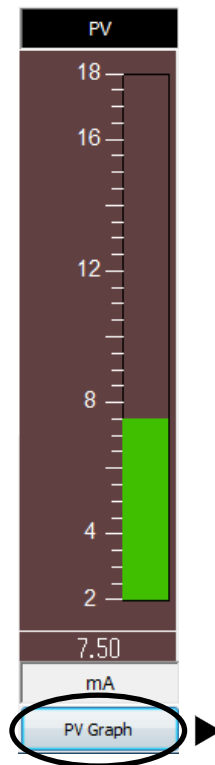


Figure 4. Trend Graph

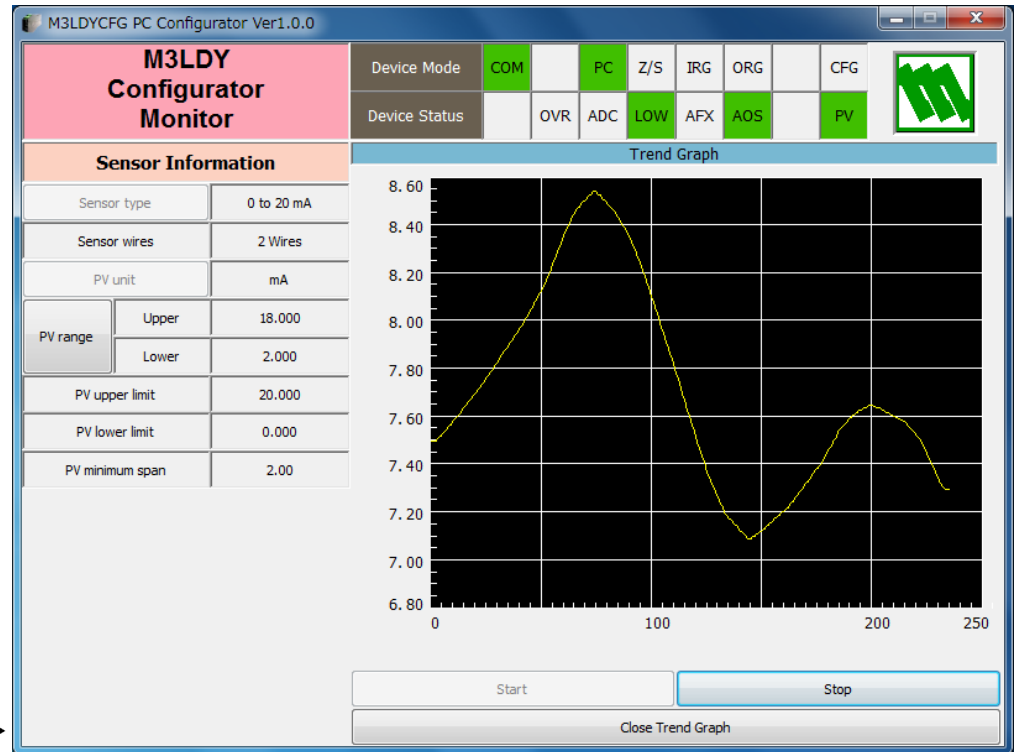

3. CONFIGURATION

3.1. INPUT CONFIGURATION

In Figure 3, the Sensor Information menu on the left shows basic configuration information of the connected device. When you need to change configurations, click the left button for the required parameter to modify its setting.


Sensor Information		
Sensor type	0 to 20 mA	
Sensor wires	2 Wires	
PV unit	mA	
PV range	Upper	18.000
	Lower	2.000
PV upper limit	20.000	
PV lower limit	0.000	
PV minimum span	2.00	

Sensor type	Shows the input sensor types.
Sensor wires	Shows number of wires.
PV unit	Shows 'mA'
PV range (Upper / Lower)	Specifies input range for 0% and 100%. Click the left button opens a dialog box to change the setting. The input range can be also changed on One Step Calibration mode. Note that the Zero Offset is automatically adjusted when the input range is changed on One Step Calibration mode, while it must be separately adjusted on Sensor Information window.
PV upper limit	Shows the usable range information for the selected type of sensor.
PV lower limit	
PV minimum span	

3.2. DETAILED INFORMATION

In Figure 3, click [Detailed Info] in Functions menu to the right opens the [Detailed Information] menu as shown in Figure 5.

Figure 5. Detailed Information

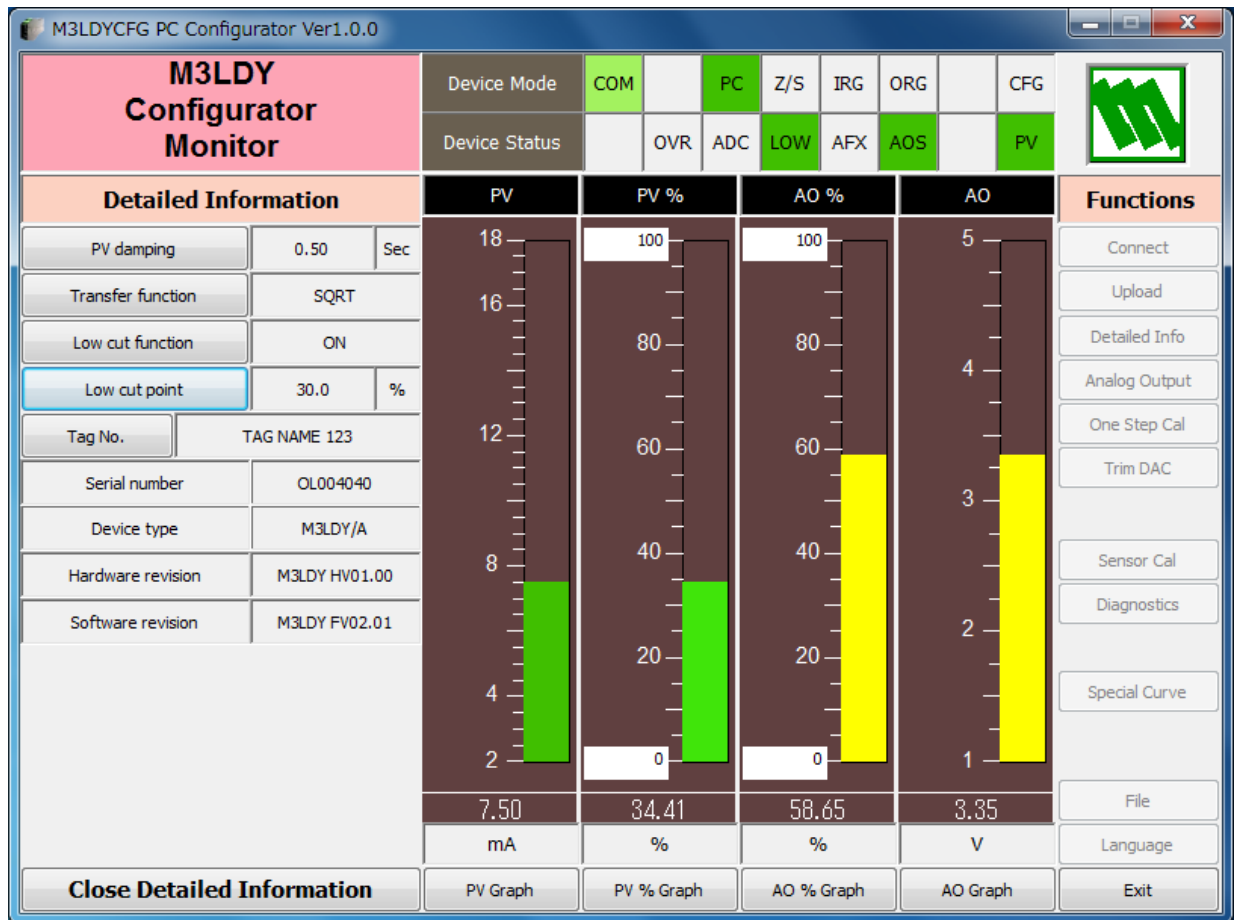


PV damping	Specifies the time constant for the primary input filter. Selectable range is from 0.5 sec. up to 30 sec. When you do not need a filtering, specify '0.'
Transfer function	Enable/disable the Transfer function. Choose from among following 3 types. LINEAR SQRT SPECIAL_CURVE Click [Transfer function] button to specify either the output should be linear to the input signal or linearized to a custom curve data.
Low cut function (Refer to 3.2.1)	Specify the ON/OFF status of the Low cut function. OFF ON Click [Low cut function] button to enable (ON) or disable (OFF) the Low cut function.
Low cut point	The low-end cutout point is represented by % of the input range. Click [Low cut point] to specify the value. Selectable range is from 0 to 100%.
Tag No.	You can enter a tag name using up to 16 alphanumerical characters.
Serial number	Automatically displayed.
Device type	
Hardware revision	
Software revision	
Close Detailed Information	Close the window.

3.2.1. LOU CUT FUNCTION

When the Low cut function is active, the output value is cut off if the input value is equal to or lower than % of the input range set as the "low-end cutout point." The output value is cut off in accordance with the set input-to-output Transfer function. Deadband of approx. 0.2% is provided for stable operations.

With SQRT function, the output is linear proportional to the input value below the low-end cutout point (See Figure below).




With Linear or Special_Curve function, 0% is outputted when the input value is below the low-end cutout point.

3.3. ANALOG OUTPUT

In Figure 3, click [Analog Output] in Functions menu to the right opens the [Analog Output] menu as shown in Figure 6.

Figure 6. Analog Output

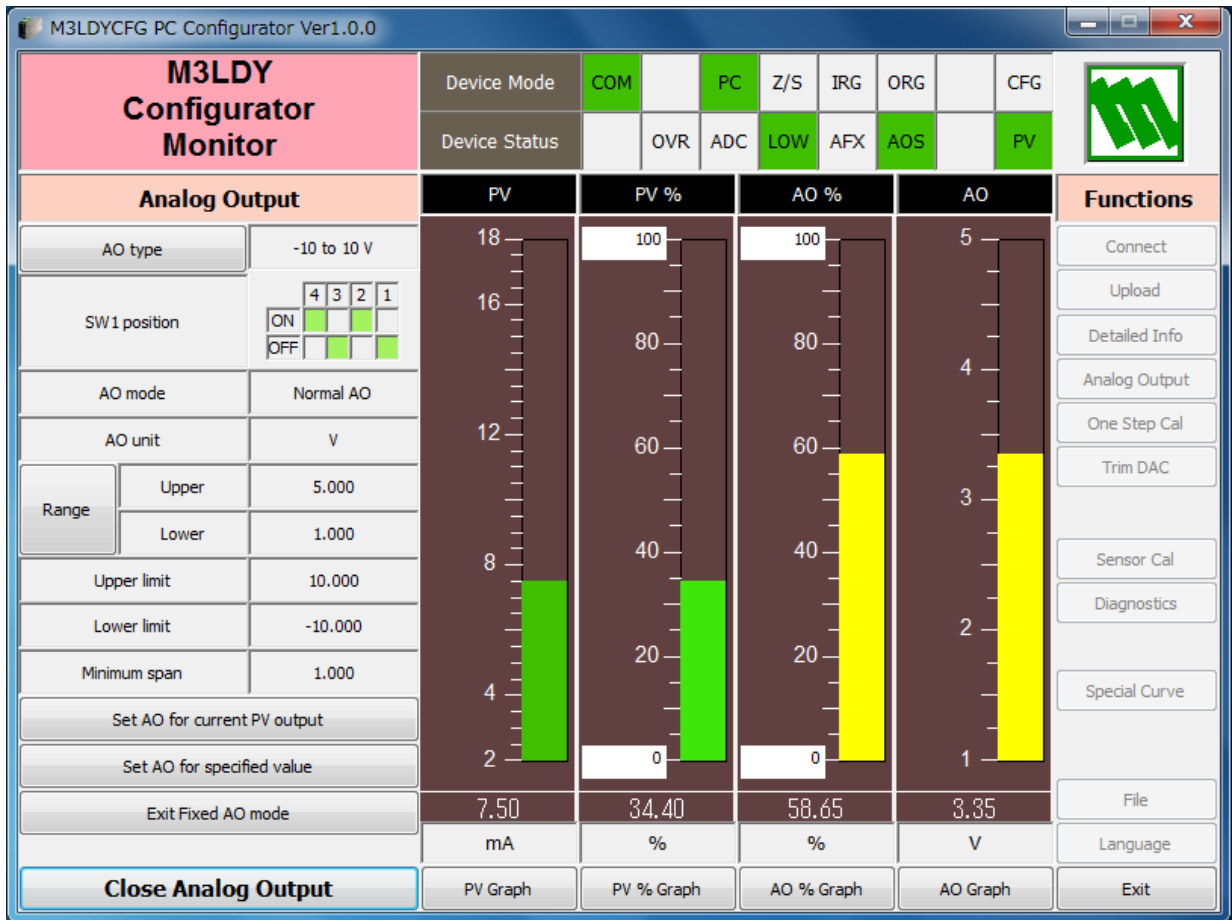


The Analog Output menu on the left shows the output type and ranges. When you need to change configurations, click the left button for the required item to modify the setting.

AO type	Specifies the Analog Output type from among three choices. 0 to 20 mA -2500 to +2500 mV -10 to +10 V Click [AO type] button to specify output type.
SW1 position	Shows DIP SW configuration (hardware setting) required for the selected output type. Confirm actual setting.
AO mode	Shows the output mode. 'Normal AO' is usually displayed.
AO unit	Shows engineering unit for the output signal.
Range (Upper / Lower)	Specifies the output range for 0% and 100%.
Upper limit	Show the usable range information for the selected output type.
Lower limit	
Minimum span	
Set AO for current PV output	The output signal is held at the current value.
Set AO for specified value	You can set a specific value to fix the output in order to perform an output loop simulation test.
Exit Fixed AO mode	Cancels the fixed output mode to return the device into normal output mode.
Close Analog Output	Close the window.

4. ONE STEP CALIBRATION

In Figure 3, click [One Step Cal] on the right control panel opens the One Step Calibration menu as shown in Figure 7. The 'One Step Calibration' technique realizes automatic input and output ranging with a signal simulator connected to the module's input terminals.

Figure 7. One Step Calibration

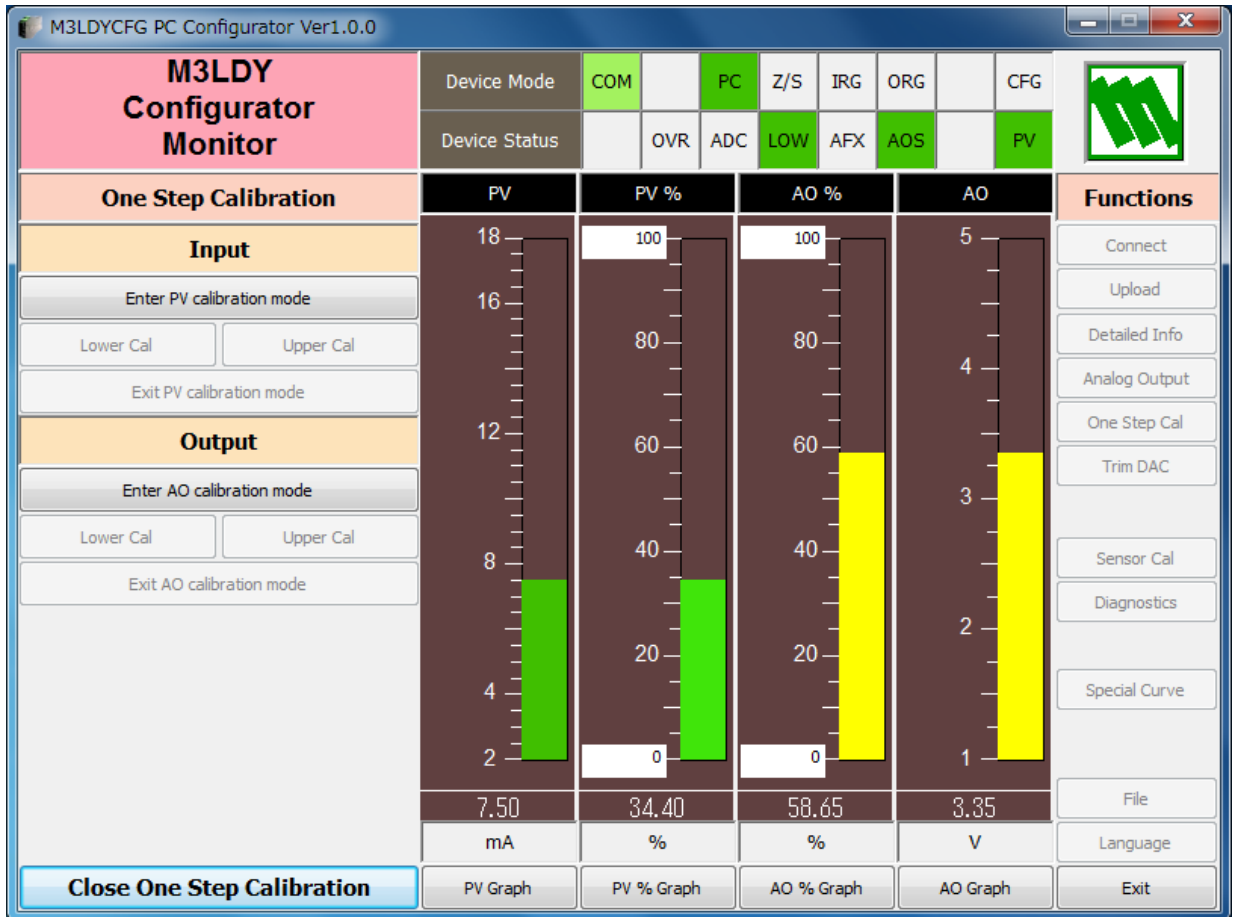


4.1. INPUT CALIBRATION MODE

- (1) Connect the M3LDY to a simulator as described in the M3LDY instruction manual.
- (2) Click [Enter PV calibration mode] in order to turn the module into the input calibration mode. The red [IRG] lamp in [Device Mode] panel at the top turns ON while the module is in this mode.




- (3) Apply desired 0% and 100% signal levels and click [Lower Cal] and [Upper Cal] buttons respectively so that the input range is automatically set.

Input: 5 mA (Lower Cal)

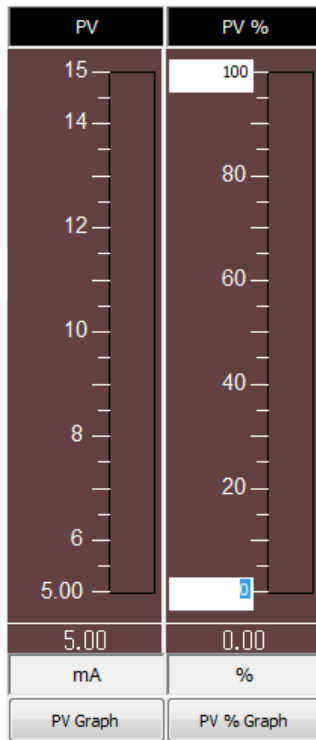

Input: 15 mA (Upper Cal)

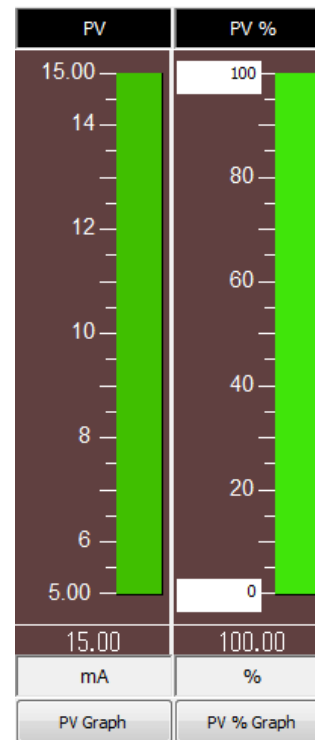

- (4) Click [Exit PV calibration mode] when the calibration is complete.

4.2. OUTPUT CALIBRATION MODE



(1) Click [Enter AO calibration mode] in order to turn the module into the output calibration mode. The red [ORG] lamp in [Device Mode] panel at the top turns ON while the module is in this mode.



(2) Increase or decrease the simulated input until the output multimeter shows desired 0% and 100% signal levels and click [Lower Cal] and [Upper Cal] buttons respectively so that the output range is automatically set.

Apply the input so that output become 0%

Apply the input so that output become 100%

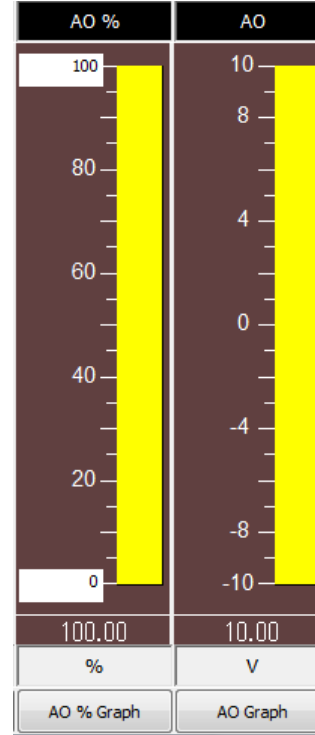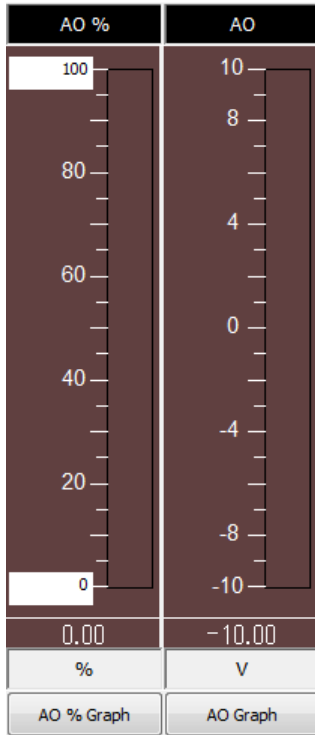

(3) Click [Exit AO calibration mode] when the calibration is complete.


Click [Close One Step Calibration] to close the window.

5. INPUT / OUTPUT CALIBRATION

5.1. DAC TRIMMING

Click [Trim DAC] button to open the Trim DAC window as shown in Figure 8.

Figure 8. Trim DAC (e.g. Upper Range Trim Mode)

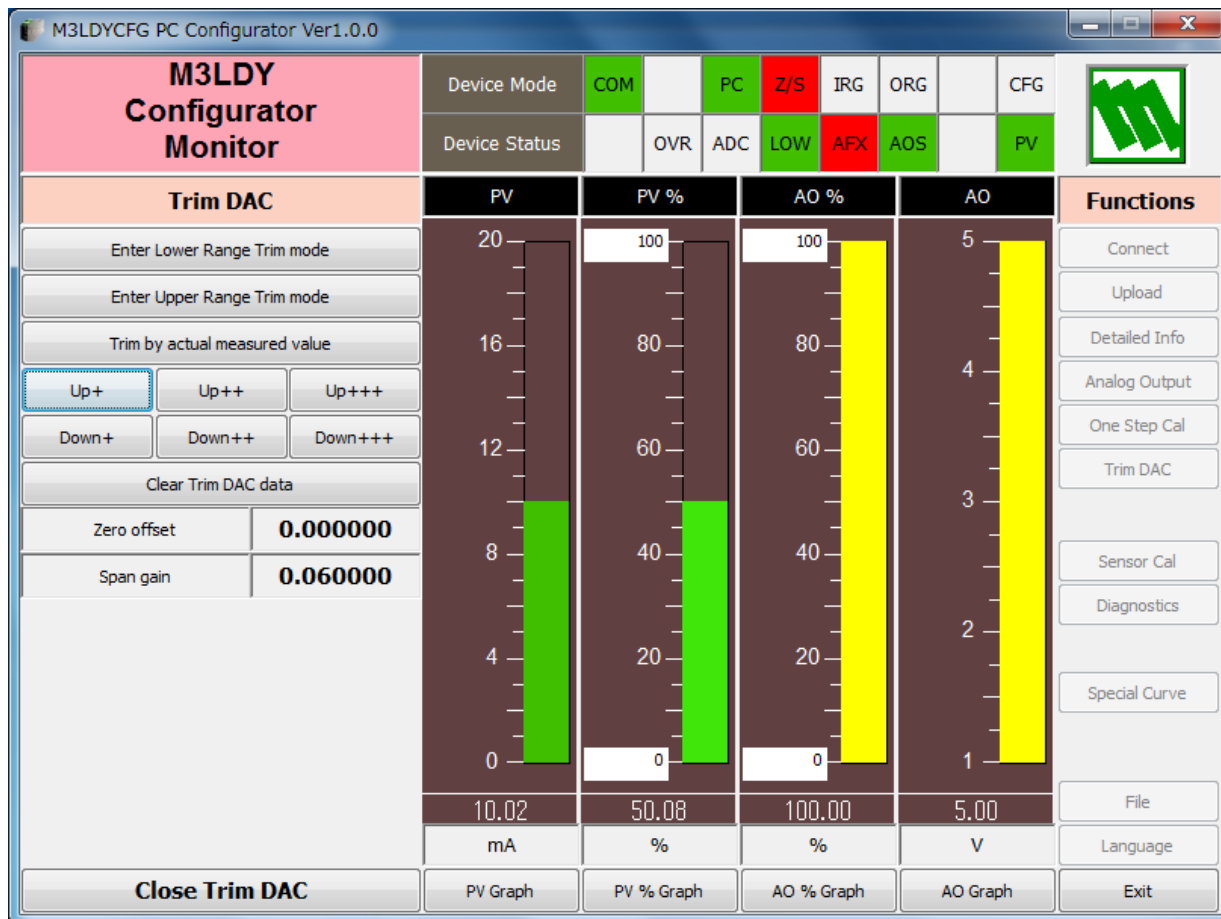

5.1.1. LOWER RANGE DAC TRIMMING

- (1) Click [Enter Lower Range Trim mode]. The device outputs a fixed lower range signal level.
- (2) Measure the actual output signal at the receiving instrument to which the device output should be matched.
- (3) Click [Trim by actual measured value] to set the measured value.
- (4) Repeat setting [Trim by actual measured value] until the measured output shows the desired level. Alternately, use [Up] or [Down] buttons. [+], [++] and [+++] have different increments. Deviation from the default value is shown in [Zero offset]. Lower range value is adjustable within $\pm 15\%$.

5.1.2. UPPER RANGE DAC TRIMMING

- (1) Click [Enter Upper Range Trim Mode]. The device outputs a fixed upper range signal level.
- (2) Measure the actual output signal at the receiving instrument to which the device output should be matched.
- (3) Click [Trim by actual measured value] to set the measured value.
- (4) Repeat setting [Trim by actual measured value] until the measured output shows the desired level. Alternately, use [Up] or [Down] buttons. [+], [++] and [+++] have different increments. Deviation from the default value is shown in [Span gain]. Upper range value is adjustable within $\pm 15\%$.

5.1.3. RESETTING TO THE DEFAULT

Click [Clear Trim DAC data] to return the device to the factory default trimming values (0.0 for both Zero offset and Span gain).

Click [Close Trim DAC] to close the window.


5.2. SENSOR CALIBRATION

The input sensor can be calibrated with Zero and Span: Zero is represented as offset at the calibration point, while Span is represented as gain against the zero point. The gain must be set from 0.1 to 10.0.

Calibration points can be specified to any point within the measuring range.

Click [Sensor Cal] button to open the Sensor Calibration window as shown in Figure 9.

Figure 9. Sensor Calibration

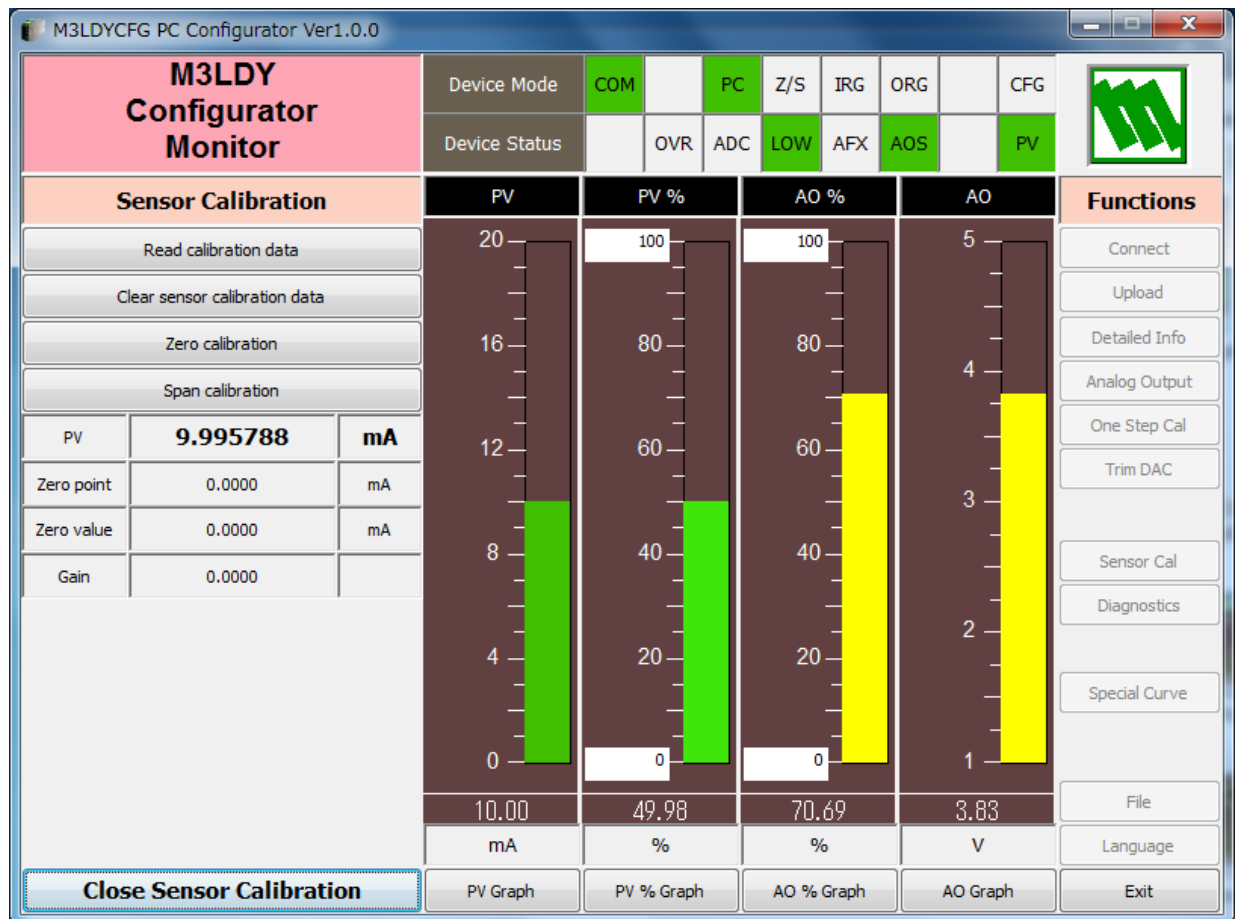

The present measured value is indicated in the middle. Refer to this value when calibrating the sensor. It takes several seconds for the calibration result affects the measured value on the display.

Apply zero calibration point input signal and click [Zero calibration] to open the field where you can enter a target value. The result is shown in the PV display field. Data before calibration is shown in the Zero point field, while that after calibration is shown in the Zero value field.

Apply span calibration point input signal and click [Span calibration] to open the field where you can enter a target value. The result is shown in the PV display field. Span point gain against the zero point is shown in the Gain field.

[Read calibration data] calls up and display the present calibrated values in these fields.

Click [Clear sensor calibration data] to return the device to the factory default status.

Factory default settings are: Zero Point = Zero Value = 0 mA, Gain = 1.0.

When the sensor type is changed, the calibration data are reset to these factory default values.

Click [Close Sensor Calibration] to close the window.

6. OFFLINE CONFIGURATION AND READ / WRITE FILES

6.1. LINEARIZATION TABLE

The M3LDY supports the user-specific linearization table function (Special_Curve). In order to use the Special_Curve, the data in text format must be defined and registered. Specify "SPECIAL_CURVE" of [Transfer function] in the Detailed Information window, and then the user-specific transfer function can be used. The procedure to use user-specific transfer function is as follows.

1. Create a user-specific linearization table as follows.
2. Click [Transfer function] button on the Detailed Information menu and select "LINEAR." (A new transfer function cannot be written when "SPECIAL CURVE" is selected.)
3. Click [Special Curve] button to open the Special Curve window.
4. Click [Read table from file] button to read a created linearization table. Basic information is shown in the Special Curve Table Contents.
5. Click [Display Special Curve graph] button to show characteristics data in a graph.
6. Click [Write table to device] button to download currently displayed characteristics data to the M3LDY.
7. Confirm that status under Special Curve Table Contents shows 'Configured. This means a SPECIAL_CURVE is registered in the device. If the status under Special Curve Table Contents does not show 'Configured, [Transfer function] can not be set to SPECIAL_CURVE.
8. Click [Transfer function] button on the Detailed Information menu and select "SPECIAL_CURVE" to enable the new transfer function.

6.1.1. LINEARIZATION TABLE SETTING

For the user-specific linearization table, the data in text format must be defined and registered. The file format is as following.


Describe the characteristics data within { }. Sets of X and Y values must be entered in %. Up to 101 points can be specified.

```
/*-----  
/* Linearization Table( Special Curve ) Definition  
/* Yi = f(Xi) ( 0 <= i < Size )  
/* -15<= X, Y <= 115 %  
/* Xi < Xi+1  
/* 2<= Size <= 101  
/*-----  
{  
0.000000, 0.000000 <-- The minimum X and Y values  
:  
100.000000, 100.000000 <-- The maximum X and Y values  
}
```

6.1.2. SPECIAL CURVE


Click [Special Curve] button to open the Special Curve as shown in Figure 10.

Figure 10. Special Curve

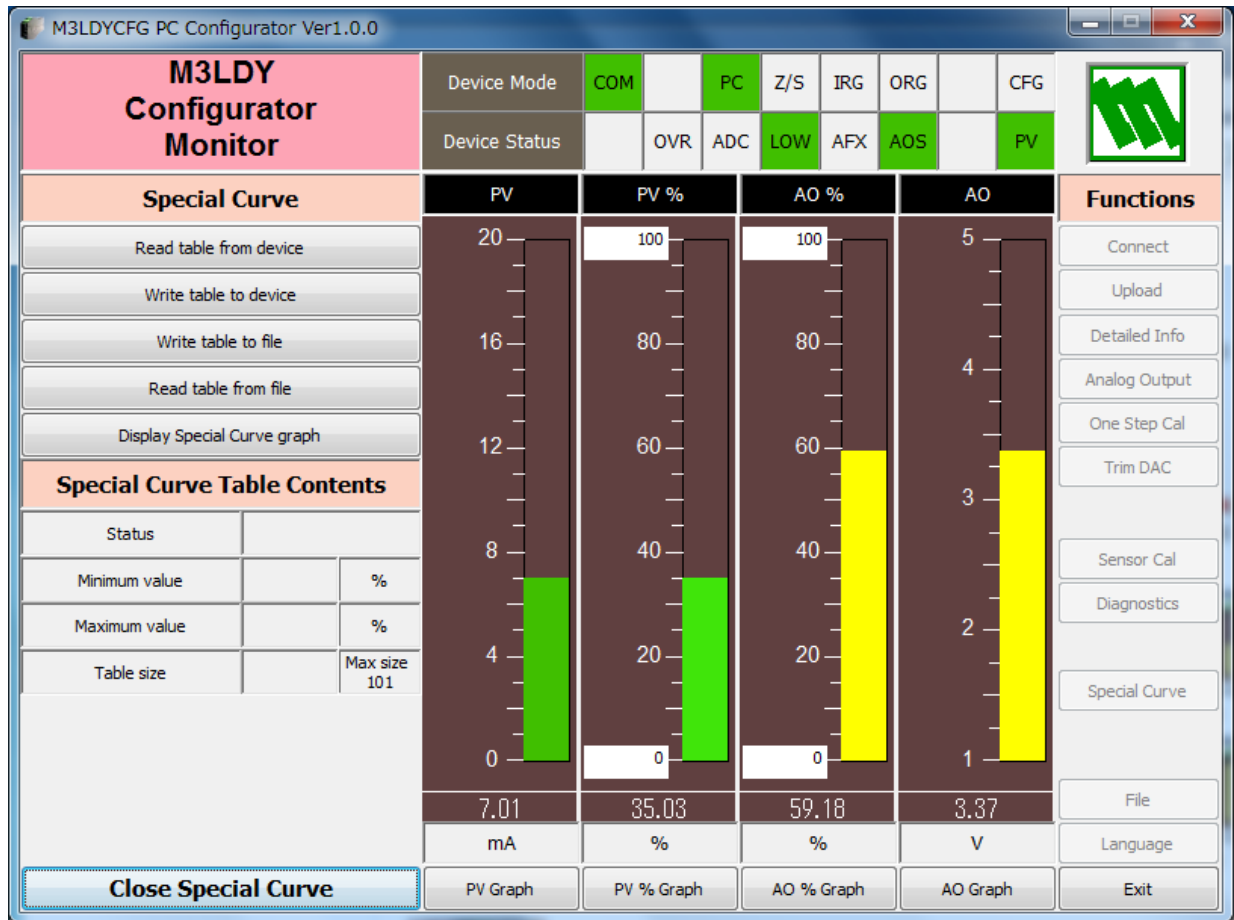

Read table from device	The program uploads characteristics table registered in the M3LDY. If there is no file registered, Status under Special Curve Table Contents shows 'Non configured.'	
Write table to device	The program downloads currently displayed characteristics to the M3LDY. When downloading is successfully complete, Status under Special Curve Table Contents shows 'Configured.'	
Write table to file	The program saves currently displayed characteristics data to a file.	
Read table from file	The program uploads a file stored in the PC. When uploaded, the file contents summary is indicated under Special Curve Table Contents.	
Display Special Curve graph	Characteristics data can be shown in a graph. (figure 11)	
Special Curve Table Contents	Show the summary of Special Curve Table	
	Status	Show the status of Special Curve Table.
	Minimum value	Minimum input (x) in %
	Maximum value	Maximum input (x) in %
Table size	Defined number of point	
Close Special Curve	Close the window.	

Figure 11. Special Curve graph

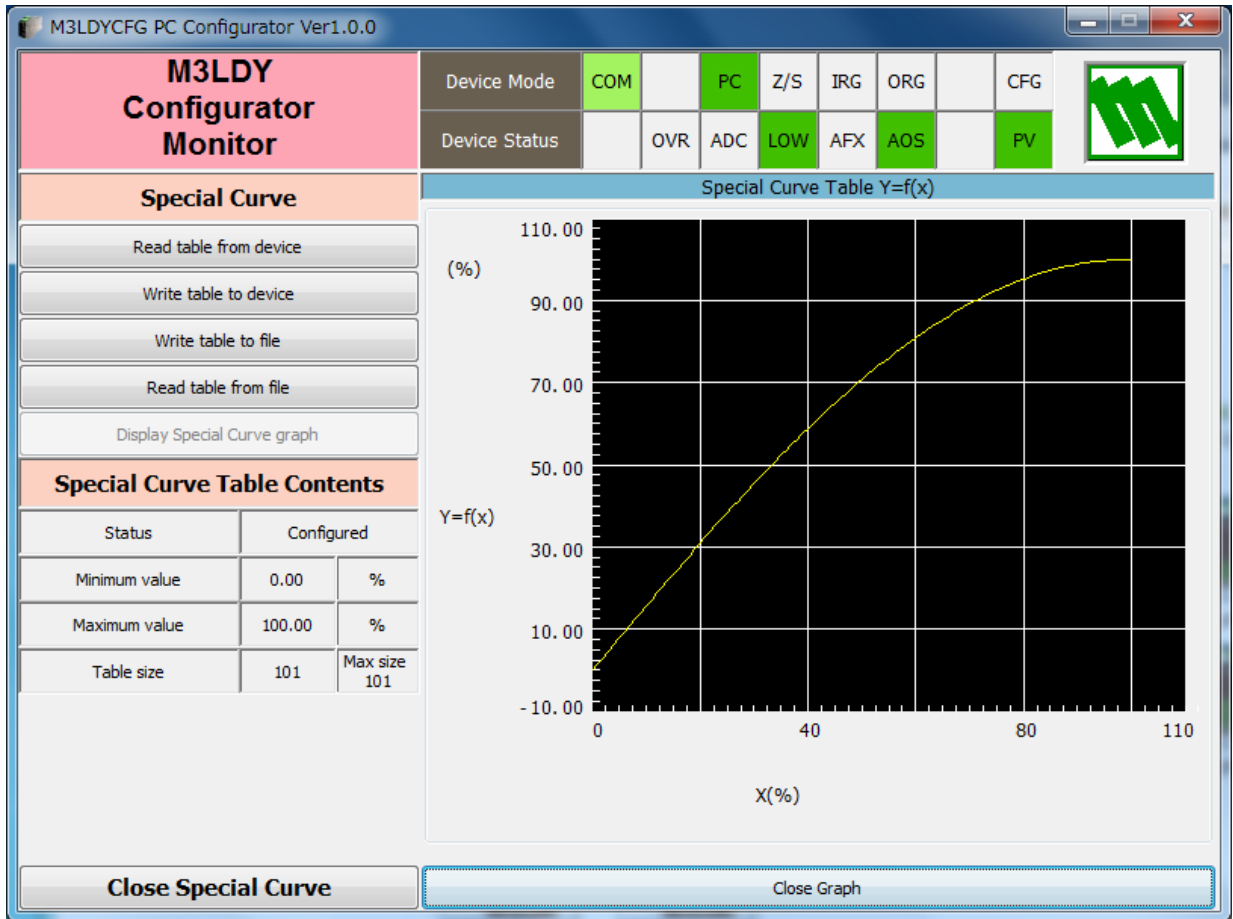

6.2. FILE MANAGEMENT

The M3LDY's configurations can be saved in a file and then read out to be downloaded to multiple modules.

Click [File] button to open the File Management window as shown in Figure 12.

While this window is active, the device connection is severed, therefore the device can be connected and disconnected freely except during Upload or Download operations.

The window is divided in two sections: 'File Configuration' and 'Device Configuration.' 'File Configuration' shows data transfer (Read or Write) between the PC Configurator and the PC, while 'Device Configuration' shows data transfer (Upload or Download) between the configurator and the device.

Click [Exit] to complete the file management operations. The device will remain disconnected and must be 'Connected' to start monitoring.

NOTE

- (1) Validity of the selected range values is not verified in this window. Please make sure to set them according to the described specifications.
- (2) Special Curve Table data is not handled in this window.
- (3) With the Option /B version, Download is unavailable. However, Upload is possible to save a configuration file, or to compare with other configurations.
- (4) A comment can be entered in 'Description' in File Configuration section, which is saved in a configuration file. It cannot be written in the device. When a setting is uploaded from device, the relevant field in Device Configuration shows the device's serial number.

Figure 12. File

6.2.1. MODIFYING PARAMETERS

Click [CHG] button at the left of each field to modify the parameter. Fields in which the parameter has been changed will be highlighted in light yellow background color. [CHG] buttons placed across multiple fields indicate that these parameters can be modified in single sequence.

When one parameter has been changed, related fields may be also affected. For example, when 'Sensor type' is modified, 'PV range' may be automatically changed.

Parameters can be copied between 'File Configuration' and 'Device Configuration' using [<] and [>] buttons. Copied fields will be highlighted in light yellow background color.

Using [All Copy <<] or [All Copy >>] buttons enables transferring all parameters between the sections. Copied fields will be highlighted in light yellow background color.

Figure 13. Parameters Modified

Properties		File Configuration				Device Configuration				
Exit	Page	Read File	Write File	Upload	Download	Compare	All Copy <<	>> All Copy	Compare	
	1									
Description	CHG	OL004040				OL004040				CHG
Tag No.	CHG	TAG NAME 123				TAG NAME 123				CHG
Sensor type		0 to 20 mA				0 to 20 mA				
Sensor wires	CHG	2 Wires				2 Wires				CHG
PV unit		mA				mA				
PV upper range	CHG	18.000	mA		20.000	mA			CHG	
PV lower range	CHG	2.000	mA		0.000	mA			CHG	
PV damping	CHG	0.500	Sec		1.000	Sec			CHG	
Transfer function	CHG	SQRT				SQRT				CHG
Low cut function	CHG	ON				ON				CHG
Low cut point	CHG	30.000	%		30.000	%			CHG	
AO type	CHG	0 to 20 mA				-10 to 10 V				CHG
AO upper range	CHG	20.000	mA		5.000	V			CHG	
AO lower range	CHG	4.000	mA		1.000	V			CHG	

6.2.2. TRANSFERRING DATA TO/FROM DEVICE

Click [Upload] button to connect to the device, to read out its configuration data and to show it in 'Device Configuration' section on the screen (Figure 14). All background colors are back to the initial state.

'Description' indicates the serial number of the product, which cannot be modified or copied from 'File Configuration' section.

Click [Download] button to connect and write the configuration data in 'Device Configuration' fields to the device.

If an error occurs and downloading is stopped during the process, erred data field is highlighted in med pale red background color.

When the downloading is successfully complete, the configuration data is automatically uploaded and the background color returns to the initial state.

Figure 14. Data Uploaded, first page

Properties	File Configuration				Device Configuration			
Description	CHG		<	>	OL004040			CHG
Tag No.	CHG		<	>	TAG NAME 123			CHG
Sensor type		0 to 20 mA			0 to 20 mA			
Sensor wires	CHG	2 Wires		<	>	2 Wires		CHG
PV unit		mA			mA			
PV upper range	CHG	20.000	mA	<	>	20.000	mA	CHG
PV lower range	CHG	4.000	mA	<	>	0.000	mA	CHG
PV damping	CHG		Sec	<	>	0.500	Sec	CHG
Transfer function	CHG			<	>	SQRT		CHG
Low cut function	CHG			<	>	ON		CHG
Low cut point	CHG		%	<	>	30.000	%	CHG
AO type	CHG			<	>	-10 to 10 V		CHG
AO upper range	CHG			<	>	5.000	V	CHG
AO lower range	CHG			<	>	1.000	V	CHG

6.2.3. READING/WRITING FILES

Click [Read File] button to read the configuration data from a specified file and to show it in 'File Configuration' section on the screen (Figure 15). All background colors are back to the initial state.

Click [Write File] button to write the configuration data in 'File Configuration' section to a specified file.

A comment (max. 64 alphanumeric characters) can be entered in 'Description' in File Configuration section, which is saved in a configuration file. It cannot be written in the device. When a setting is uploaded from device, the relevant field in Device Configuration shows the device's serial number.

Figure 15. File Read Out

The screenshot shows the M3LDYCFG PC Configurator Ver1.0.0 interface. The 'Read File' button is highlighted in blue. The interface is divided into two main sections: 'File Configuration' and 'Device Configuration'. The 'File Configuration' section contains fields for Description (OL004040), Tag No. (TAG NAME TEST), Sensor type (0 to 20 mA), Sensor wires (2 Wires), PV unit (mA), PV upper range (18.000 mA), PV lower range (2.000 mA), PV damping (0.500 Sec), Transfer function (SQRT), Low cut function (ON), and Low cut point (20.000 %). The 'Device Configuration' section contains fields for Description (OL004040), Tag No. (TAG NAME 123), Sensor type (0 to 20 mA), Sensor wires (2 Wires), PV unit (mA), PV upper range (20.000 mA), PV lower range (0.000 mA), PV damping (0.500 Sec), Transfer function (SQRT), Low cut function (ON), and Low cut point (30.000 %). The 'AO type' section is also visible, showing -10 to 10 V, AO upper range (5.000 V), and AO lower range (1.000 V). The interface includes buttons for Exit, Page (1), Read File, Write File, Upload, Download, Compare, All Copy <<, >> All Copy, and Compare. The 'Read File' button is currently selected.

Properties		File Configuration				Device Configuration			
Description	CHG	OL004040				OL004040			
Tag No.	CHG	TAG NAME TEST				TAG NAME 123			
Sensor type		0 to 20 mA				0 to 20 mA			
Sensor wires	CHG	2 Wires				2 Wires			
PV unit		mA				mA			
PV upper range	CHG	18.000	mA			20.000	mA	CHG	
PV lower range	CHG	2.000	mA			0.000	mA	CHG	
PV damping	CHG	0.500	Sec			0.500	Sec	CHG	
Transfer function	CHG	SQRT				SQRT			
Low cut function	CHG	ON				ON			
Low cut point	CHG	20.000	%			30.000	%	CHG	
AO type	CHG	-10 to 10 V				-10 to 10 V			
AO upper range	CHG	5.000	V			5.000	V	CHG	
AO lower range	CHG	1.000	V			1.000	V	CHG	

6.2.4. COMPARING FILE TO DEVICE

You can compare the configuration data in 'File Configuration' fields and 'Device Configuration' fields.

Click [Compare] button in 'Device Configuration' fields to compare its data to those in 'File Configuration' fields. Deviations will be highlighted in med pale red background color.

Click [Compare] button in 'File Configuration' fields to compare its data to those in 'Device Configuration' fields. Deviations will be highlighted in med pale red background color.

Figure 16. Parameters Compared

Properties	File Configuration				Device Configuration			
Description	CHG	OL004040	<	>	OL004040			CHG
Tag No.	CHG	TAG NAME TEST	<	>	TAG NAME 123			CHG
Sensor type		0 to 20 mA			0 to 20 mA			
Sensor wires	CHG	2 Wires	<	>	2 Wires			CHG
PV unit		mA			mA			
PV upper range	CHG	18.000	mA	<	20.000	mA		CHG
PV lower range		2.000	mA		0.000	mA		
PV damping	CHG	0.500	Sec	<	0.500	Sec		CHG
Transfer function	CHG	SQRT	<	>	SQRT			CHG
Low cut function	CHG	ON	<	>	ON			CHG
Low cut point	CHG	20.000	%	<	30.000	%		CHG
AO type	CHG	-10 to 10 V	<	>	-10 to 10 V			CHG
AO upper range		5.000	V		5.000	V		
AO lower range	CHG	1.000	V	<	1.000	V		CHG

6.2.5. OPERATION EXAMPLE BY FILE MANAGEMENT

Operation procedure to change the configuration of the device with file management.

(1) Click [Read File] button to read the configuration data from a specified file

Properties		File Configuration				Device Configuration			
Description	CHG	OL004040				OL004040			
Tag No.	CHG	TAG NAME TEST				TAG NAME 123			
Sensor type		0 to 20 mA				0 to 20 mA			
Sensor wires	CHG	2 Wires				2 Wires			
PV unit		mA				mA			
PV upper range	CHG	18.000	mA	<	>	20.000	mA	CHG	
PV lower range	CHG	2.000	mA	<	>	0.000	mA	CHG	
PV damping	CHG	0.500	Sec	<	>	0.500	Sec	CHG	
Transfer function	CHG	SQRT				SQRT			
Low cut function	CHG	ON				ON			
Low cut point	CHG	20.000	%	<	>	30.000	%	CHG	
AO type	CHG	-10 to 10 V				-10 to 10 V			
AO upper range	CHG	5.000	V	<	>	5.000	V	CHG	
AO lower range	CHG	1.000	V	<	>	1.000	V	CHG	


(2) Click [Upload] button to connect to the device, to read out its configuration data.

Properties		File Configuration				Device Configuration			
Description	CHG	OL004040				OL004040			
Tag No.	CHG	TAG NAME TEST				TAG NAME 123			
Sensor type		0 to 20 mA				0 to 20 mA			
Sensor wires	CHG	2 Wires				2 Wires			
PV unit		mA				mA			
PV upper range	CHG	18.000	mA	<	>	20.000	mA	CHG	
PV lower range	CHG	2.000	mA	<	>	0.000	mA	CHG	
PV damping	CHG	0.500	Sec	<	>	0.500	Sec	CHG	
Transfer function	CHG	SQRT				SQRT			
Low cut function	CHG	ON				ON			
Low cut point	CHG	20.000	%	<	>	30.000	%	CHG	
AO type	CHG	-10 to 10 V				-10 to 10 V			
AO upper range	CHG	5.000	V	<	>	5.000	V	CHG	
AO lower range	CHG	1.000	V	<	>	1.000	V	CHG	


(3) Click [Compare] button in 'File Configuration' fields to compare the data in the file and the data in the device. Deviations will be highlighted in med pale red background color.

Properties		File Configuration				Device Configuration			
Description	CHG	OL004040				OL004040			
Tag No.	CHG	TAG NAME TEST				TAG NAME 123			
Sensor type		0 to 20 mA				0 to 20 mA			
Sensor wires	CHG	2 Wires				2 Wires			
PV unit		mA				mA			
PV upper range	CHG	18.000	mA	<	>	20.000	mA	CHG	
PV lower range	CHG	2.000	mA	<	>	0.000	mA	CHG	
PV damping	CHG	0.500	Sec	<	>	0.500	Sec	CHG	
Transfer function	CHG	SQRT				SQRT			
Low cut function	CHG	ON				ON			
Low cut point	CHG	20.000	%	<	>	30.000	%	CHG	
AO type	CHG	-10 to 10 V				-10 to 10 V			
AO upper range	CHG	5.000	V	<	>	5.000	V	CHG	
AO lower range	CHG	1.000	V	<	>	1.000	V	CHG	


(4) Parameter can be copied from 'File Configuration' to 'Device Configuration' using [>] button. Copied fields will be highlighted in light yellow background color.

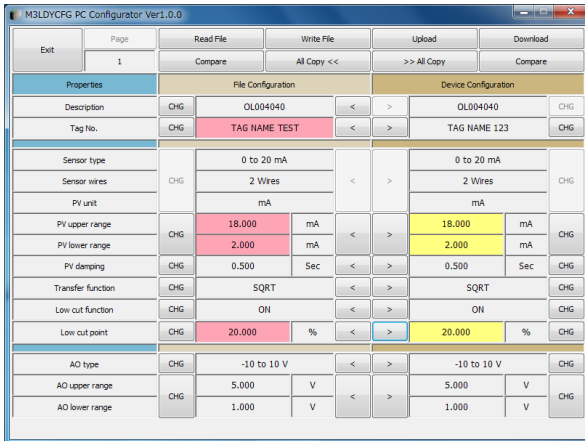

(5) Click [CHG] button at the left of each field to modify the parameter. Fields in which the parameter has been changed will be highlighted in light yellow background color.

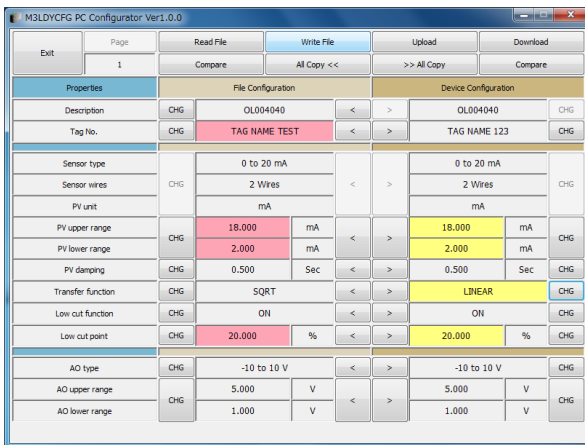


(6) Click [Download] button to write the configuration data in 'Device Configuration' fields to the connected device. When the downloading is successfully complete, the configuration data is automatically uploaded and the background color returns to the initial state.

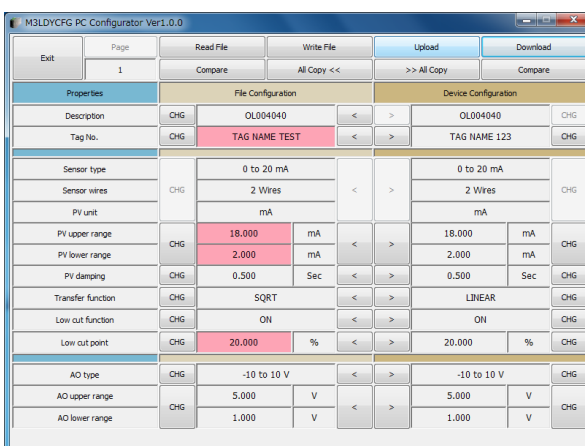

7. DIAGNOSTICS

Click [Diagnostics] button to open the Diagnostics window as shown in Figure 17.

Figure 17. Diagnostics

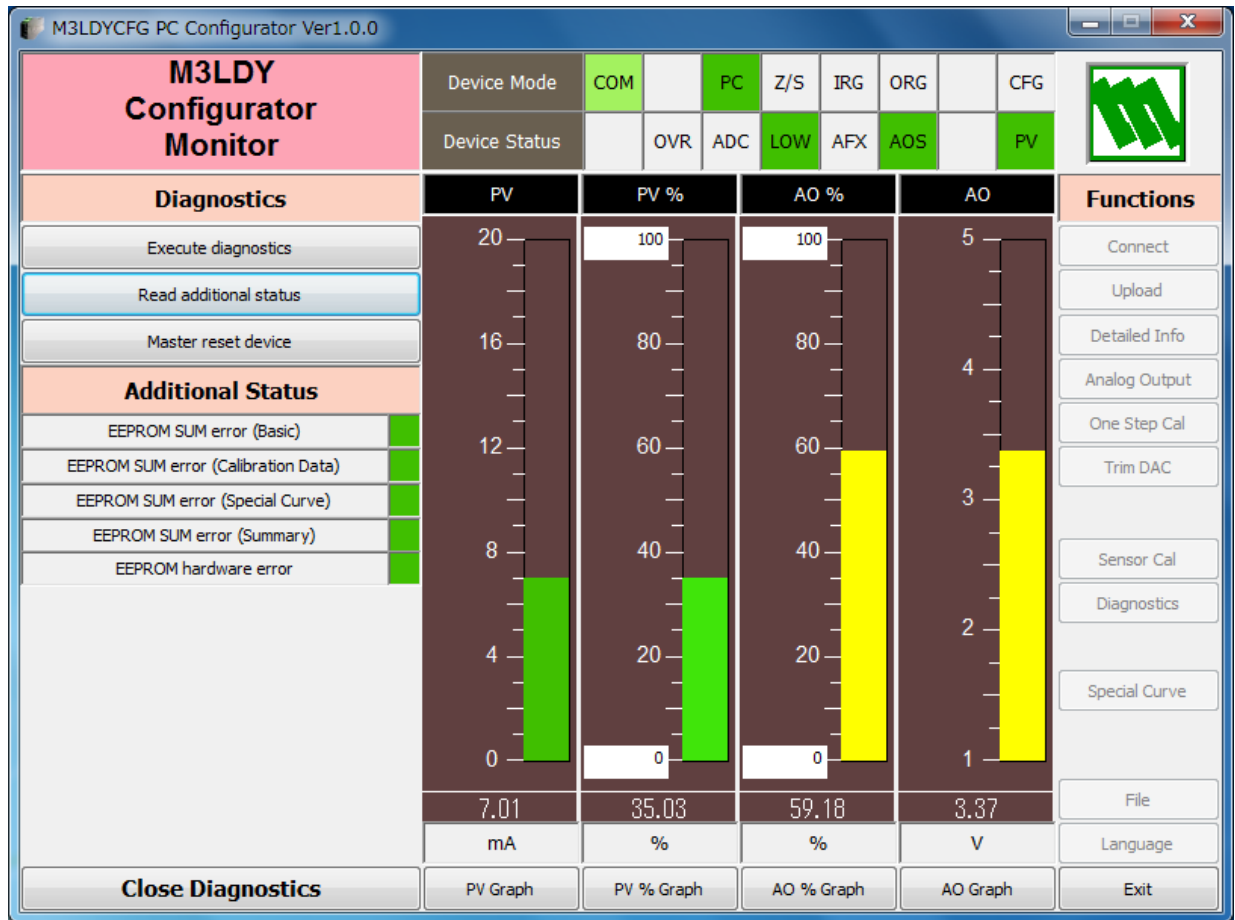


Execute diagnostics		Activates a diagnostics program and results are displayed in Additional Status.
Read additional status		Reads current contents of Additional Status from the device.
Master reset device		Reset and restart the device without actually turning OFF/ON the power supply.
Additional Status	EEPROM SUM error (Basic)	Status is displayed: green in normal status, while red in error.
	EEPROM SUM error (Calibration Data)	
	EEPROM SUM error (Special Curve)	
	EEPROM SUM error (Summary)	
	EEPROM SUM hardware error	
Close Diagnostics		Close the window.

8. LANGUAGE

Click [Language] button to open the Language window as shown in Figure 18. The user can select the display language of the M3LDYCFG.

Figure 18. Language

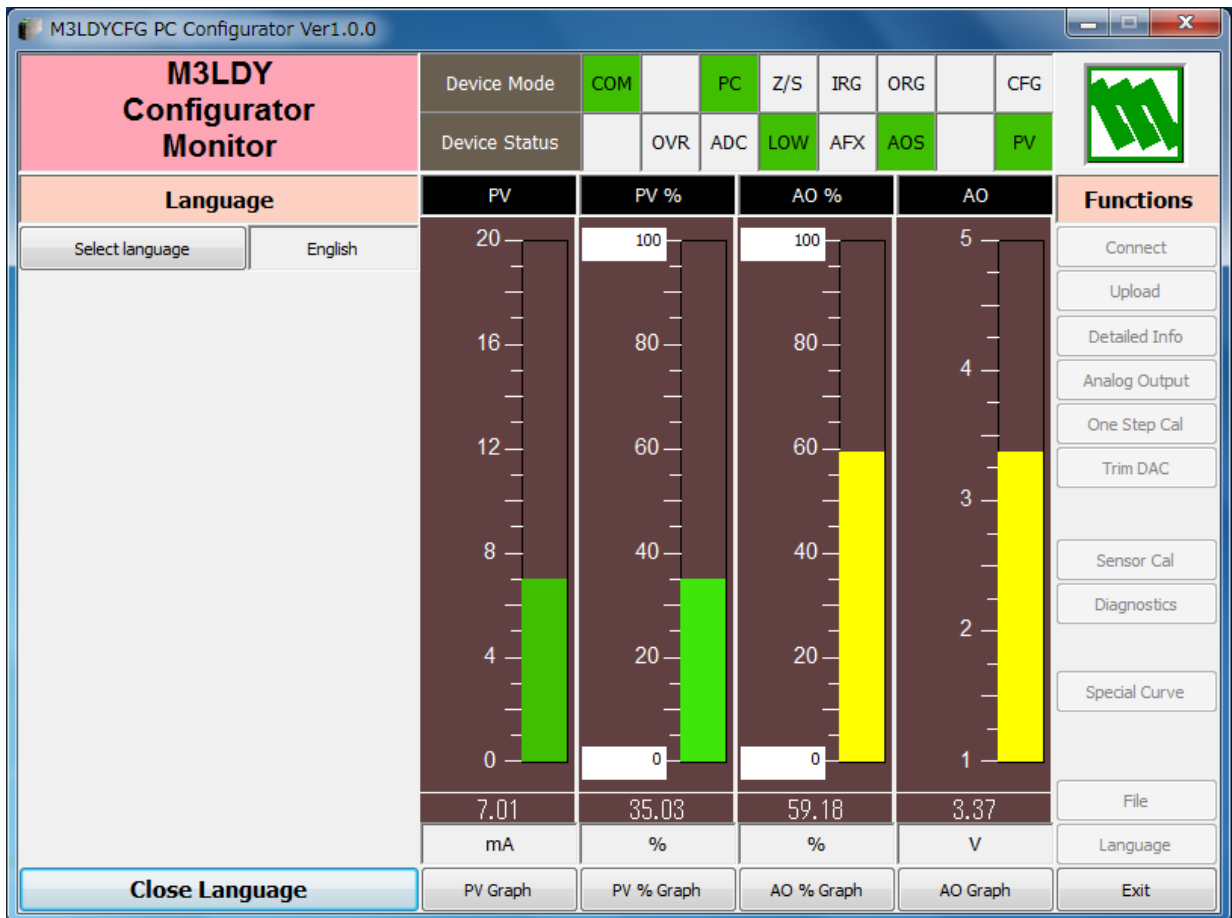

Click [Select language] to select the available language. The selected language is shown on the screen immediately. English is available in each language version of Windows, while Windows in your PC must support other language in order to display it.

Click [Close Language] to close the window.