

1	Four-wire Signal Conditioners
2	Two-wire Signal Conditioners
3	Power Monitoring Components
4	Indicators & Tower Lights
5	Remote I/O
6	Paperless Recorders & PC Recorder
7	Process & Temperature Controllers
8	IoT Components
9	Final Control Components
10	Lightning Surge Protectors
11	Sensors



# CATEGORY INDEX

PC / DCS / PLC

Components  
for Building  
Automation

Page 27

Limited to  
Japanese Market



IoT Components

Page 31-33



Paperless Recorders  
& PC Recorder

Page 28-29



Indicators

Page 16-18



Two-wire Signal  
Conditioners

Page 12-13



Four-wire Signal  
Conditioners

Page 4-11




Limit  
Alarms

Page 9



Lightning Surge  
Protectors

Page 38-39



Sensors

Page 40





Mobile terminals (smartphones, tablets) or mobile network operator services are not our products.

# FOUR-WIRE SIGNAL CONDITIONERS

A signal conditioner is used to condition and convert a field sensor signal suitable for processing with the PLC/DCS in a wide variety of process plants and factories. Typical applications are:

- ✓ **Signal conversion**
- ✓ **Signal isolation to stop ground loops**
- ✓ **Signal boosting to increase load drive capability**

Our signal conditioners are available with wide combinations of process signal I/O, power input and mounting configuration. Additionally, we offer the broadest line of signal splitters available.

## Choose by Housing and Terminal Access Styles

- Plug-in base socket mounted
- Terminal block style
- Euro terminal block style
- Ultra-slim housing
- Installation base mounted
- Rack mounted
- Field enclosure mounted
- Sensor head mounted
- PCB mounted
- Connector output

## Choose by I/O Signal Types

- Universal input
- DC mV, V, mA
- Two-wire transmitter
- Temperature
- Potentiometer
- Strain gauge
- CT & VT
- Frequency and pulse
- Pneumatic
- AC power
- And others

## Choose by Functions

- Isolation / Amplification
- Conversion / Transmission
- Signal splitting
- Limit alarm
- Filtering
- Math / Process function
- Linearization

## Choose by Power Supply

- AC line powered (4-wire)
- DC line powered (4-wire)
- Output loop powered (2-wire)
- Input loop powered (self powered)

Simulation experiments demonstrate effectiveness of isolators



How to choose DC signal isolators



## ISOLATOR APPLICATIONS 1


Isolator is installed between a transmitter (i.e. sensor) and a receiver to galvanically isolate DC signals.

Breaking the path between a field instrument and a control room device minimizes various influences coming from the field site to the control room.

In addition, each instrument separated by galvanic isolation can choose its own ground point independently from other ones, avoiding the 'ground loop' problem.

Lastly, the isolator can provide impedance conversion to beat loop impedance constraints, and signal level conversion (e.g. from 10-50 mA to 4-20 mA) function.


### 4-wire isolator : 4-20 mA (passive) input / 4-20 mA output / Line powered

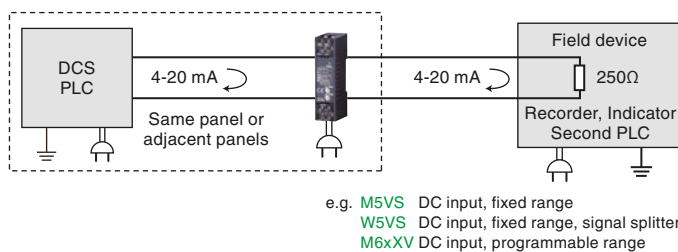

Designed primarily for front-ending PLC/DCS systems which are mounted within the same panel or adjacent to it. The isolator module is powered from terminals separate from signal lines.

- Test and measurement applications
- Manufacturing cells
- Monitoring systems located in-line with the manufacturing process

### 4-wire isolator / current loop supply : 4-20 mA (active) input / 4-20 mA output / Line powered

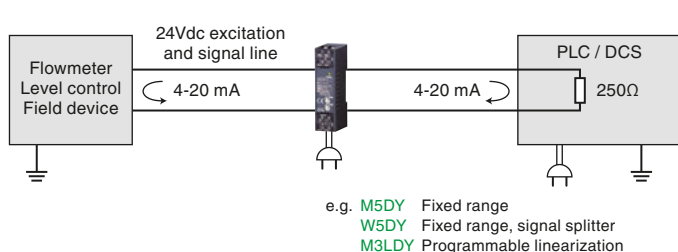

Basic isolator designed to interface a PLC and DCS system with a field instrument. The isolator module supplies 24 Vdc power to the field device and provides a linearized output signal if necessary.

- Remote field signal monitored by control system
- Water/wastewater treatment
- Petrochemical, tank farms, large manufacturing sites



## Low-profile Signal Conditioners


### M5 / M5X / W5 Series

- Only 41 mm (1.61 in) deep, terminal block style modules can be installed anywhere, even behind the panel cover.
- M5X Series** PC programmable types have a convenient loop test output function.
- W5 Series** provides a second isolated output of independent range.




Compact, terminal block style housing

#### M5 Series

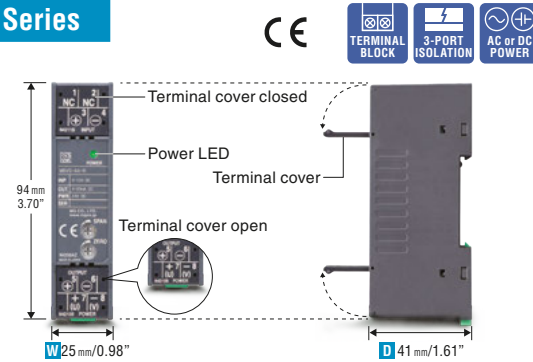

#### W5 Series

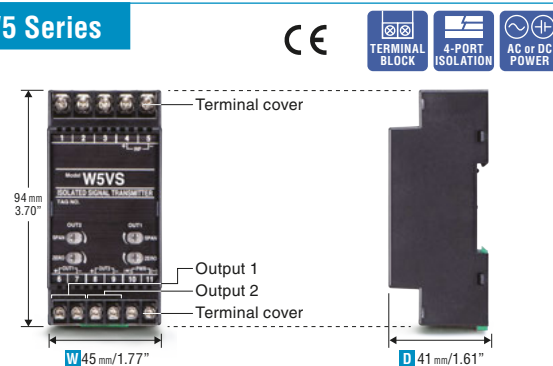

#### Four-wire Signal Conditioners

Two-wire Signal Conditioners

Power Monitoring Components

Indicators & Tower Lights

Remote I/O

Paperless Recorders & PC Recorder

Process & Temperature Controllers

IoT Components

Final Control Components


Lightning Surge Protectors

Sensors

## Ultra-slim Signal Conditioners

### M6 / M60 Series

- M6 Series** is available with three connection styles: Tension-clamp (M6S), screw terminal (M6N) or euro terminal (M6D).
- M60 Series** is available with separable tension-clamp terminal block or mini-clamp (e-CON) connector.
- Low power consumption, high load drive capability

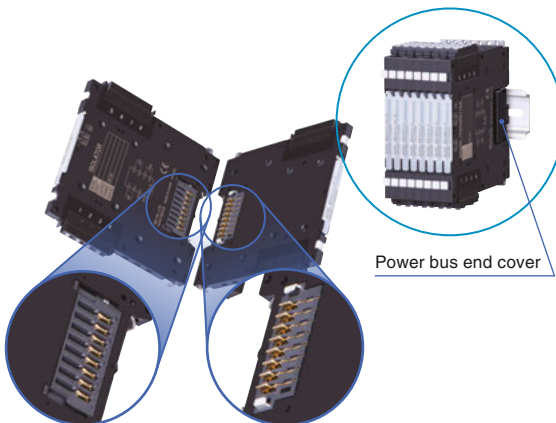


Female connector


Male connector

Highly reliable power bus connection: hooks and grooves sliding into each other (M60 Series)

#### M6D Series

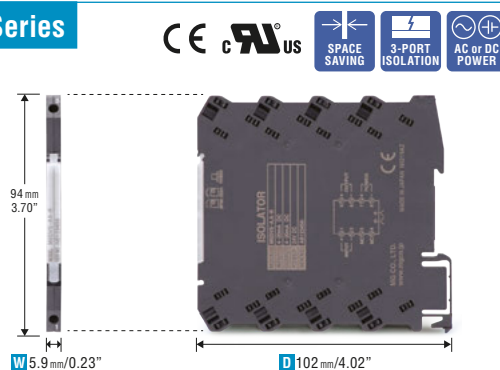

#### M60 Series

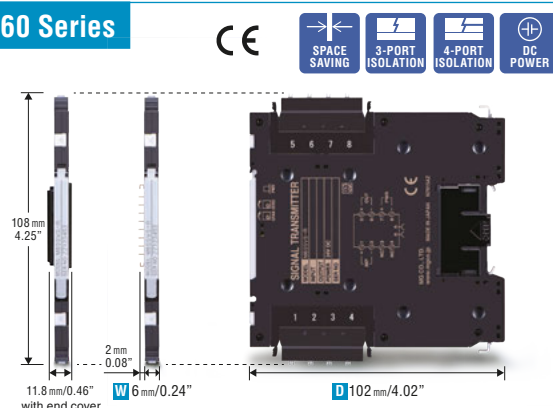

About Us

#### Four-wire Signal Conditioners

Two-wire Signal Conditioners

Power Monitoring Components

Indicators & Tower Lights

Remote I/O

Paperless Recorders & PC Recorder

Process & Temperature Controllers

IoT Components

Final Control Components

Lightning Surge Protectors


Sensors

About Us

## Compact Plug-in Signal Conditioners


### M2 / M2E / W2 Series

- **M2/W2 Series** (Mini-M and Mini-MW) features a wide selection of input/output ranges and functions.
- **M2E Series** with bright, high-contrast OEL (Organic Electroluminescence) display for setup and process monitor
- **W2 Series** provides a second isolated output of independent range.
- PC programmable types have a convenient loop test output function.
- Base socket included with the modules

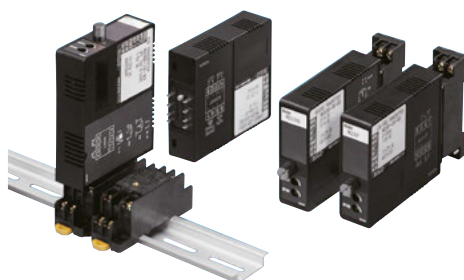


Plug-in socket mounted


#### M2 Series

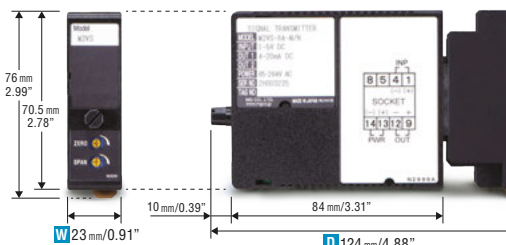

#### M2E Series

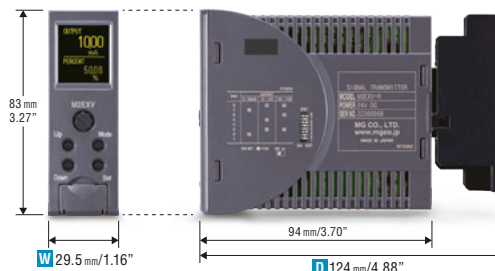

#### W2 Series

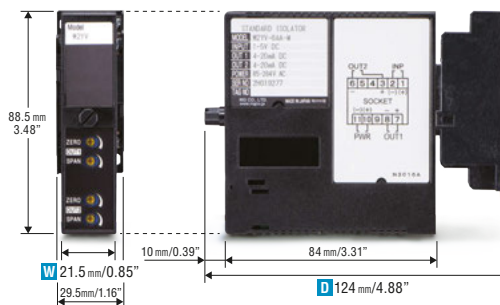

**M2E SERIES:**  
High-contrast OEL display makes  
loop checking easy for  
commissioning and maintenance



Multi display




Single display



Scrolling text

Programming mode

## Why Isolate the Second Output?

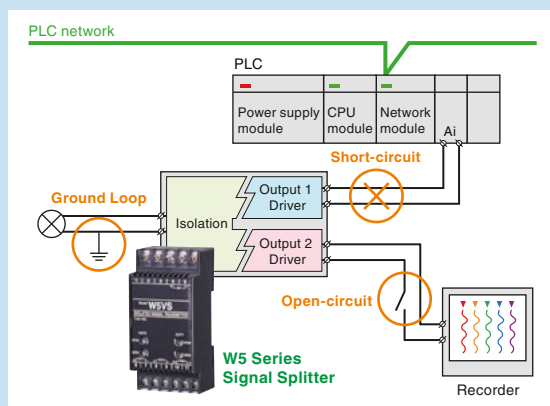

## Channel-to-channel Isolation Enhances the Overall System Reliability

Whenever you want to add another device such as a recorder to a sensor signal loop connected to PLC's analog input module, a signal splitter that can output two isolated signals is recommended.

The loop's load capacity may allow to connect one more load in series to (4-20 mA current signal) or in parallel to (1-5 V voltage signal) an existing receiving instrument. However, in such a configuration, short-circuit, open-circuit or ground loop at one part of the loop could affect the entire system.

Galvanically separating each part of the loop is beneficial to contain any damage to the limited section in case of an accident, thus to making troubleshooting easier, minimizing the system downtime.



## M3L Series

"One-Step Cal" Configuration without PC

- Enhanced PC configurator software is also available.
- Universal I/O specifications ideal for spare parts stock reduction programs



## M3S Series


12-mm Wide, Thin-profile Module

- Space-saving modules with separable terminal blocks
- Universal AC/DC power input available



## M8 Series

Direct Connection to PLC/DCS Plus Field Output

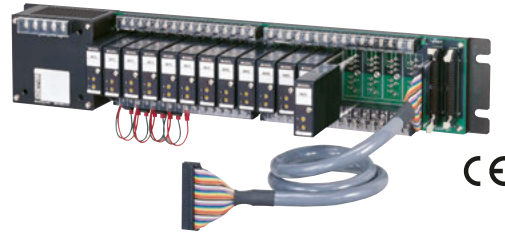

- Super-mini, plug-in modules
- 4-, 8- or 16-position installation base
- 4-20 mA output module available for control

## 20 Series Isolation Amplifiers

Customized Hybrid IC

- Greatly saves development lead time for analog isolation circuitry
- Standardized product lineup as a second source of major suppliers
- RoHS compliant
- Two-port or three-port isolation
- $\pm 5$  V,  $\pm 10$  V input/output and other ranges
- Frequency characteristics options
- Withstand voltage up to 5000 Vac



### STANDARDIZED MODEL EXAMPLES



#### 20VS5-201

Linearity  $\pm 0.005\%$  TYP  
G=1 ( $\pm 0.01\%$  MAX)



#### 20VS5-202

Linearity  $\pm 0.01\%$  TYP  
G=1 ( $\pm 0.015\%$  MAX)



#### 20VS8-202

SIP or DIP  
3000 Vac isolation



#### 20VS8-210

Frequency characteristics  
Approx. 20 kHz



Simulation experiments demonstrate effectiveness of isolators




How to choose DC signal isolators



## ISOLATOR APPLICATIONS 2


### 4-wire isolator / current loop supply : 4-20 mA (active) input / 4-20 mA output (source) / Line powered

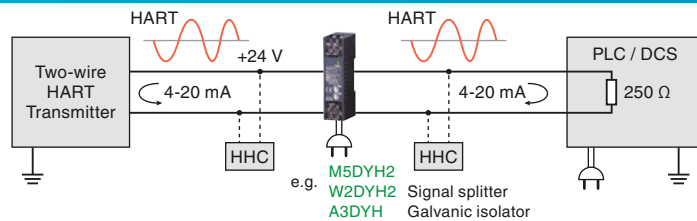

Designed to interface a PLC and DCS system with a field HART transmitter. The isolator module supplies 24 Vdc power to the field device.

It also allows the HART signal to pass when a technician needs to access the transmitter's process and diagnostic information via the HART signal using a HART hand-held communicator (HHC), from any termination point of the loop at both sides of the isolator.

### When the receiver powers the isolator's output loop (sink)

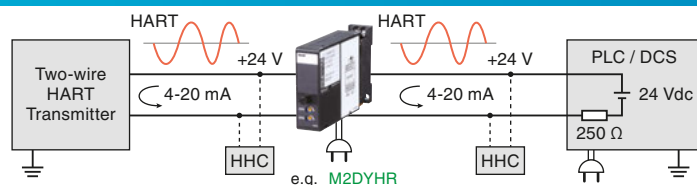

- Remote field signal monitored by control system
- Water/wastewater treatment
- Petrochemical, tank farms, large manufacturing sites

## Function Modules & Retrofit Products


### Unique Functions for Stable Process Operations

- Math functions
- Process functions
- Filters
- Unique functions to ensure stable process operations and to solve problems in system upgrading




- Temp/pressure compensation
- Addition / Subtraction
- Multiplication / Division
- Ratio / Bias
- Delay buffer / Ramp buffer
- Moving average
- Lead time / Dead time
- Linearization
- Square root extraction
- Palmer-Borlus flume / Parshall flume
- Triangular/v-notch/rectangular weir
- Inverted output
- High / Low limiting
- Track / Hold
- Peak / Valley hold
- High / Low selecting
- Channel switching
- Parameter generator

### I/O CHARACTERISTICS EXAMPLES

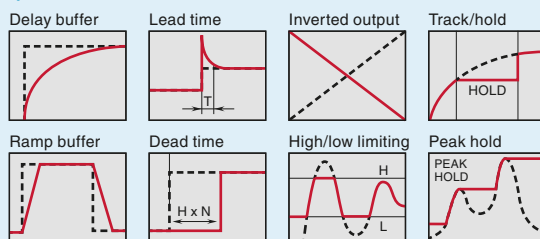

## Strain Gauge Transmitters

### Tank / silo / hopper weighing system

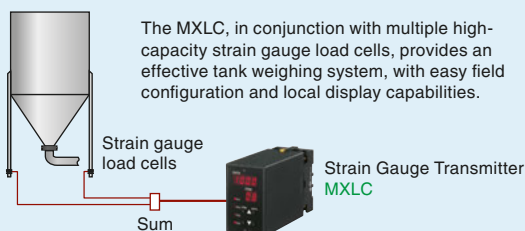

### "One-Step Cal" Configuration without PC M3LLC

- DIP switch or PC configurable
- <10 msec. response
- Auto tare feature controlled by PLC or DCS
- Manual on-site calibration



### Dual Isolated Outputs W5LCS

- Low profile: depth 41 mm (1.21 in.)
- Providing a second isolated output of independent range




### Fast Response Remote Sensing LCF

- Six-wire bridge
- <300 microsec. response (2 kHz, -3 dB)




### Adding an extra output for a PLC

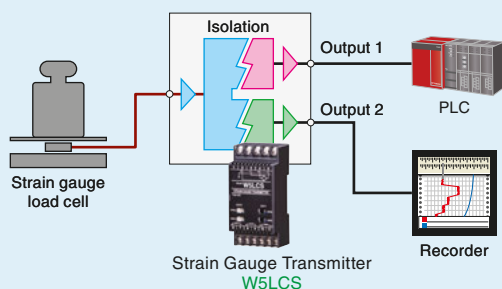

An extra isolated output signal for a PLC can be safely added to an existing signal loop by using the W5LCS.

### High speed weight measurement for filling machines

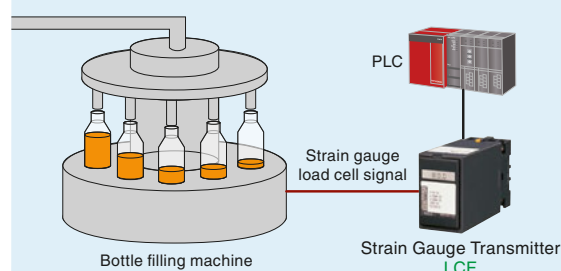

To control a bottle filling machine that runs in high speed, liquid weight in each bottle must be measured with speed and accuracy. The LCF converts minute load cell signal changes with speed and accuracy.



A limit alarm is used to provide one or more relay/contact outputs when a monitored process signal goes out of preset high or low limits. Typical applications are:

- ✓ **Trouble warning (annunciators)**
- ✓ **Emergency shutdown**
- ✓ **ON/OFF control**

Our limit alarms are available with wide combinations of process signal I/O and power input, featuring also various setpoint access means.

Programmable alarms feature enhanced programmable functions such as failsafe operation, deadband, delay time, latching relay and others, while analog alarms feature basic but easy setting.

## Programmable Limit Alarms

### Quad/Octad Alarm with OEL Display

#### M1EA Series

- Multi-line display showing parameters and selection in text: intuitive, easy programming
- 4-point SPDT or 8-point NO or NC contact (single-channel type)
- 2-point SPDT or 4-point NO or NC contact (dual-channel type)
- PC configuration is also available.



CE

### Dual/Quad Alarm with LED Display

#### AS4 Series

- Simple configuration via the front Up/Down buttons with a help of two displays, by calling parameters' ID numbers (ITEM) and choosing values (DATA)
- Direct sensor input: DC, temperature, potentiometer, strain gauge and CT
- Field selectable sensor type and range
- 2-point SPDT or 4-point NO or NC output



CE cULus

### Dual/Quad Alarm with OEL Display

#### M2EA Series

- Multi-line display showing parameters and selection in text: intuitive, easy programming
- 2-point SPDT or 4-point NO or NC contact
- PC configuration is also available.



CE

### Panel Surface Mount

#### KS2V2 / KS2TR2

- 1/16 DIN size (48 mm square) panel cutout
- 1-5 Vdc input (KS2V2) or temperature (T/C or RTD) input (KS2TR2)
- Dual SPDT output



CE cULus

## Analog Limit Alarms

### Simple Setting, Direct Sensor Inputs

- Various setting methods are available: dial setting, thumbwheel switch setting, rotary switch setting, potentiometer setting.
- Direct sensor input type and extra DC transmitter output (AE-UNIT)

#### Sensor inputs:

- DC mV, V, mA • Thermocouple • RTD • Potentiometer
- Two-wire transmitter (4-20 mA active input)
- Frequency • Tachogenerator
- AC current/voltage • PT • CT



M2SED CE



M2AVS CE



AE-UNIT Series

### Products' weight test results



Products' weight test may be conducted using a quad limit alarm. Alarm setpoints can be changed at the front end of PLC, without needing to modify the PLC's ladder programs.

#### Four-wire Signal Conditioners

Two-wire Signal Conditioners

Power Monitoring Components

Indicators & Tower Lights

Remote I/O

Paperless Recorders & PC Recorder

Process & Temperature Controllers

IoT Components

Final Control Components

Lightning Surge Protectors

Sensors

About Us

# Four-wire Signal Conditioners Selection Guide

## Four-wire Signal Conditioners

Two-wire Signal Conditioners

Power Monitoring Components

Indicators & Tower Lights

Remote I/O

Paperless Recorders & PC Recorder

Process & Temperature Controllers




IoT Components

Final Control Components

Lightning Surge Protectors

Sensors

About Us




					
SERIES	M5		W5	M2 / M2E	
Enclosure / Mounting type	41 mm-deep low-profile housing, DIN rail mount			Plug-in base socket, DIN rail or surface mount	
Connection	M3.5 screw terminal		M3.5/M3 screw terminal	M3 screw terminal	
Dual output	---		Yes	(M2WVS)	
Power input	AC/DC			AC/DC	
Isolation	2000V AC (M5/AC powered type: 1500V AC)			2000V AC	
Operating temperature	-5 to +55°C (23 to 131°F) (M5X: -20 to +65°C (-4 to +149°F))			-5 to +55°C (23 to 131°F)	
Standards & Approval	CE (DC powered type)		CE (DC powered type)	M2: CE / UKCA / UL / C-UL M2E: CE	
Range Availability	Fixed range	PC configurable	Fixed range (except W5FV)	Fixed range	PC configurable (M2) Front display setting (M2E)
Isolators & Sensor Inputs					
Input loop powered isolator	M5SN			M2SN	
Isolator	M5YV				
Output isolator					
Universal input		M5XU			M2XU, M2XUM
DC mV, voltage & current	M5VS, M5MV	M5XV	W5VS, W5FV	M2VS, M2WVS	M2FV, M2XV2, M2EXV
DC mV, voltage & current (fast response)	M5VF, M5VF2			M2VF, M2VF2, M2VF3	
Universal temperature input		M5XTR			
Thermocouple	M5TS	(M5XTR)	W5TS	M2TS	M2XT2, M2EXT
RTD	M5RS	(M5XTR)	W5RS	M2RS, M2RS1	M2XR2, M2EXR
Potentiometer	M5MS		W5MS	M2MS	M2XM2, M2EXM
Current loop supply	M5D, M5DY		W5DY	M2D, M2D2, M2DYS	
Current loop supply, SQR				M2DL, M2DNY	
Current loop supply, HART	M5DYH2			M2DYH2, M2DYHR	
Strain gauge			W5LCS	M2LCS	
AC voltage & current	M5TG, M5AC*			M2TG, M2AC	
Power Transducers					
Voltage transformer	M5PT			M2PA, M2PE	
Current transformer	M5CT			M2CA, M2CE	
Clamp-on current sensor	M5CTC			M2CEC	
Multi power transducer		M5XWT, M5XWTU			
Frequency I/O					
Pulse to analog	M5PA	M5XPA	W5PA	M2SP	M2XPA3
Encoder		M5XRP			M2XRP2
Analog to pulse	M5AP*			M2AP	
Pulse isolator	M5PP, M5YPD*			M2PP	
Pulse scaler, divider	M5PRU*			M2PRU, M2PDU	
Pneumatic Transducers					
19.6-98.1 kPa				M2PV	
Function Modules					
Multi function					
Four arithmetic functions		M5XADS, M5XSBS, M5XMLS, M5XDIS		M2ADS, M2SBS, M2MLS, M2DIS	
Ratio/bias		M5XREB, M5XRTS		M2REB, M2RTS	
Linearizer		M5XF			M2XF2
Square root extractor		M5XFLS		M2FL, M2FLS	(M2XF2)
Limiter				M2LMS	
Inverted output		M5XUDS		M2UDS2, M2UDS	
Delay buffer				M2CDS	
Ramp buffer		M5XCRS		M2CRS	
Track/hold		M5XAMS		M2AMS2, M2AMS	
Peak/valley hold		M5XPHS		M2PHS2, M2PHS	
High/low selector		M5XSES		M2SES2, M2SES	
Analog switching module				M2MNV	
Parameter generator		M5XMST		M2MST	

\*Under development as of November 2024



# FOUR-WIRE SIGNAL CONDITIONERS

Only typical signal conditioner modules and specs are mentioned in this table.  
Please visit our web site to confirm availability and specs of specific models.

					
<b>W2</b>		<b>M6 / M60</b>		<b>M3 / M3S / A3</b>	
Plug-in base socket, DIN rail or surface mount		Ultra-slim housing, DIN rail mount		18 mm- or 12 mm-wide housing, DIN rail mount	
M3 screw terminal		Tension clamp, M3 screw terminal, euro type terminal, mini-clamp (e-CON) connector		Euro type connector terminal	
Yes		(M6xWVS, M60xWVS)		(M3SWVS)	
AC/DC		DC (M6xYV, M6xXU, M6xVS: AD/DC)		AC/DC	
2000V AC		M6 Series: 2000V AC M60 Series: 1500V AC		2000V AC	
-5 to +55°C (23 to 131°F)		-20 to +55°C (-4 to +131°F)		M3: -20 to +65°C (-4 to +149°F) M3S: -10 to +55°C (14 to 131°F)	
CE / UKCA / UL / C-UL		M6: CE / UL / C-UL M60: CE		M3: CE / UL / C-UL, M3S: CE A3DYH: CE / ATEX / FM	
Fixed range	PC configurable	Fixed range	PC configurable (M6) DIP SW setting (M60)	Fixed range	One-step cal (M3L) PC configurable (M3X)
<b>Isolators &amp; Sensor Inputs</b>					
		M6xSN			Input loop powered isolator
		M6xYV, M60xYV		M3SYV	Isolator
					Output isolator
			M6xXU		Universal input
W2VS		M6xVS, M6xWVS	M6xXV, M60xVS, M60xWVS	M3SVS, M3SWVS	DC mV, voltage & current
W2VF		M6xVF			DC mV, voltage & current (fast response)
					Universal temperature input
W2TS	W2XT		M6xXT		Thermocouple
W2RS, W2RS1	W2XR		M6xXR	M3SRS	RTD
W2MS	W2XM		M6xXM	M3SMS	Potentiometer
W2DYS		M6xDY		M3DY, M3SDY	Current loop supply
W2DNY					(M3LDY)
W2DYH2				A3DYH (IS)	Current loop supply, HART
					M3LLC
W2TG, W2AC					AC voltage & current
<b>Power Transducers</b>					
W2PA, W2PE					Voltage transformer
W2CA, W2CE					Current transformer
		M6xCTC			Clamp-on current sensor
					Multi power transducer
<b>Frequency I/O</b>					
W2SP		M6xPA		M3LPA2	Pulse to analog
					Encoder
W2AP			M6xXAP		Analog to pulse
W2PP		M6xPP			Pulse isolator
					Pulse scaler
<b>Pneumatic Transducers</b>					
W2PV					19.6-98.1 kPa
<b>Function Modules</b>					
			M6xF1, M6xF2		Multi function
			M6xF2		Four arithmetic functions
					Ratio/bias
	W2XF		(M6xF1)		Linearizer
	(W2XF2)		(M6xF1)		Square root extractor
			(M6xF1)		Limiter
			(M6xF1)		Inverted output
			(M6xF1)		Delay buffer
			(M6xF1)		Ramp buffer
			M6XF3		Track/hold
			M6XF3		Peak/valley hold
			(M6XF2)		High/low selector
					Analog switching module
W2MST			(M6xF1)		Parameter generator

## Four-wire Signal Conditioners

### Two-wire Signal Conditioners

### Power Monitoring Components

### Indicators & Tower Lights

### Remote I/O

### Paperless Recorders & PC Recorder

### Process & Temperature Controllers

### IoT Components

### Final Control Components

### Lightning Surge Protectors





### Sensors

### About Us





# Two-wire Signal Conditioners Selection Guide

					
SERIES	B5	B3	B6 / 27	27	26
Enclosure / Mounting type	41 mm-deep low-profile housing, DIN rail mount	18 mm-wide housing, DIN rail mount	Field mount enclosure	DIN type B head mount	
Connection	M3.5 screw terminal	Euro type connector terminal	M3.5/M3 screw terminal	M3 screw terminal	Euro type terminal block
Power input	Output loop powered				
Isolation	2000V AC	2000V AC	1500V AC		
Operating temperature	-40 to +80°C (-40 to +176°F)	-40 to +85°C (-40 to +185°F)	-40 to +85°C (-40 to +185°F)		
Standards & Approval	CE	CE / UL / C-UL / ATEX / FM	CE / ATEX / FM	CE / ATEX / FM	CE
Input loop powered isolator	B5SN				
DC mV, voltage & current	B5VS	B3VS/1, B3VS/2, B3FV			
Thermocouple	B5TS	B3FT		27TS	26TS1
RTD	B5RS	B3FR		27R, 27RS	26R1, 26RS
Potentiometer	B5MS			27PM	
Pulse		B3FP			
Universal input				27U	
Universal input, HART, IS		B3HU, B3HU2	B6U, B6U-B, 27HU-B	27HU	
Universal input, PROFIBUS		B3PA			

Simulation experiments demonstrate effectiveness of isolators




How to choose DC signal isolators



## ISOLATOR APPLICATIONS 3


### 2-wire isolator : 4-20 mA input / 4-20 mA output (loop powered)

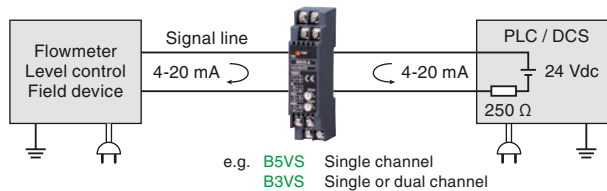


Basic isolator designed to interface a PLC and DCS system that provides a 24 Vdc power supply with a 4-20 mA input.

- Remote field signal monitored by control system
- Water/wastewater treatment
- Petrochemical, tank farms, large manufacturing sites

### With the excitation supply to the field device

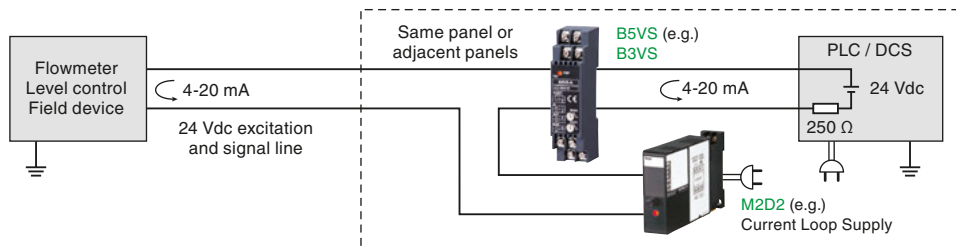

### 2-wire isolator : 4-20 mA input (loop powered) / 4-20 mA output

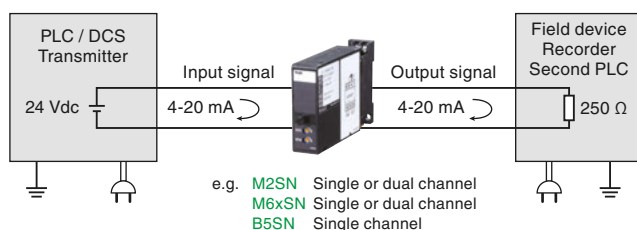

Mainly used to retrofit existing 4-20 mA process loops that need to add another instrument to the loop while maintaining isolation.

- Chart recorder or another PLC
- Backup monitoring system

Four-wire Signal Conditioners

Two-wire Signal Conditioners

Power Monitoring Components

Indicators & Tower Lights

Remote I/O

Paperless Recorders & PC Recorder

Process & Temperature Controllers

IoT Components

Final Control Components

Lightning Surge Protectors

Sensors

About Us

# POWER MONITORING COMPONENTS

## Low-profile Multi Power Transducers

### M50EXWTU / M50XWTU

- Low-profile, terminal block style modules can be installed even in shallow breaker boxes or on wall-mounted panels.
- Clamp-on current sensor input up to 600 A
- Single-phase 2-wire and 3-wire, three-phase 3-wire and 4-wire systems
- Up to 31st harmonic distortion measurement
- Modbus plus two contact outputs (energy count pulse)



M50EXWTU with OEL display




M50XWTU

Modbus


Modbus

### Single Module can Measure up to 4 Circuits! Space-saving and Economical.


- 4 x Single-phase/2-wire circuits



- 1 x Single-phase/3-wire + 2 x Single-phase/2-wire circuits

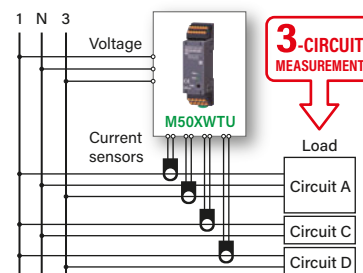


- 2 x Three-phase/3-wire circuits

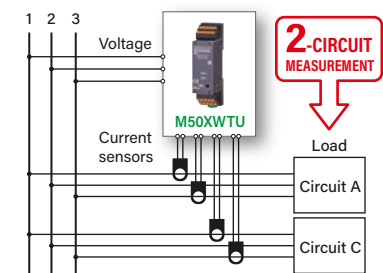


### M50EXWTU: High-contrast OEL display



Measuring value display mode

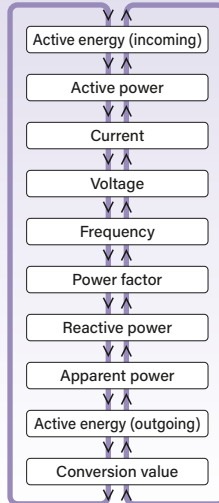

### Detailed Monitoring of Energy Usage to Calculate Carbon Footprint of Products

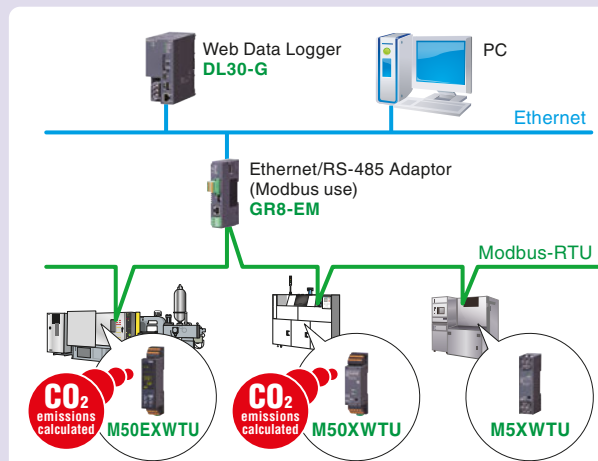

## M5X Series Multi Power Transducers


- Only 41 mm (1.61 in) deep, terminal block style modules
- Clamp-on current sensor input up to 600 A
- Up to 31st harmonic distortion measurement (M5XWTU)
- Analog or pulse output option (M5XWTU)
- Basic model M5XWT without harmonic distortion measurement



M5XWT(U)

Modbus

### Low-profile Transducer can be Retrofitted.

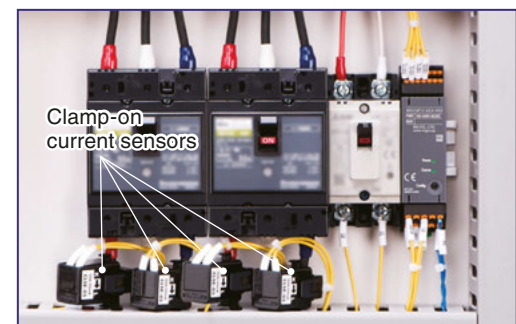

Four-wire Signal Conditioners

Two-wire Signal Conditioners

Power Monitoring Components

Indicators & Tower Lights

Remote I/O

Paperless Recorders & PC Recorder

Process & Temperature Controllers

IoT Components

Final Control Components

Lightning Surge Protectors

Sensors

About Us

## 53U / 54U Series Multi Power Monitors

- Single-phase 2-wire and 3-wire, three-phase 3-wire and 4-wire systems
- Various network communication and Ao/Do combinations selectable
- Up to 31st harmonic distortion
- Software lock
- IP50 front panel (53U, 54U)



L53U: DIN rail mounted

CE Modbus



53U: 1/4 DIN (96-mm sq.) panel size

CE cULus Modbus



54U: 110-mm sq. panel size

CC-Link Modbus LONWORKS

Four-wire Signal Conditioners

Two-wire Signal Conditioners

Power Monitoring Components

Indicators & Tower Lights

Remote I/O

Paperless Recorders & PC Recorder

Process & Temperature Controllers

IoT Components

Final Control Components

Lightning Surge Protectors

Sensors

### R3 Series Remote I/O

- 4-point totalized pulse input module for pulse pickups
- Other heavy current system input modules: AC voltage/current, zero-phase current, wattage
- Temperature, DC and other sensor signal inputs are also available.



CC-Link CC-Link IE field Modbus Modbus/TCP  
DeviceNet EtherCAT EtherNet/IP  
MECHATROLINK MECHATROLINK-III LONWORKS FL-net TLink

### R7 Series Remote I/O

- Clamp-on current sensor use: easy installation
- 2-system input



CC-Link Modbus Modbus/TCP LONWORKS

### R9 Series Remote I/O

- Clamp-on current sensor use: easy installation
- Up to 8-system input
- Time stamped data logging in SD card



CC-Link Modbus Modbus/TCP LONWORKS

### LSMT4 Multi Power Transducer

- Measuring AC current, voltage, active/reactive/apparent power and power factor
- 10 x DC voltage/mA outputs plus 2 x Do



CE

### LT-UNIT Series Power Transducers

- True RMS sensing
- M4 screw terminals
- Max. 550 Vac input
- Conforming to IEC 60688



CE

About Us

**CLSE SERIES:**  
Easy-to-Install, Spring-loaded  
Clamp-on Current Sensor

5 A  
50 A  
100 A  
200 A  
400 A  
600 A



CE



## Digital Panel Meters

Four-wire Signal Conditioners
Two-wire Signal Conditioners
Power Monitoring Components
<b>Indicators &amp; Tower Lights</b>
Remote I/O
Paperless Recorders & PC Recorder
Process & Temperature Controllers
IoT Components
Final Control Components
Lightning Surge Protectors
Sensors

### Bright, Colorful LED

#### 47L Series

- 1/8 DIN size (96 x 48 mm)
- Red, Orange, Green, Bluegreen, Blue and White LED selectable
- 4 or 4 1/2 digit display
- Alarm and/or transmitter output optional
- IP66 front panel
- Separable terminal block



### High Performance LCD Display

#### 47D Series

- 1/8 DIN size (96 x 48 mm)
- 5 1/2 digit display plus small 20 segment bargraph
- Main display color can be changed from green to red in alarm.
- Alarm and/or transmitter output optional
- 12 V or 24 Vdc sensor excitation
- RS-485 Modbus-RTU interface optional
- IP66 front panel
- Separable terminal block



Bargraph



Sub display

### Large 0.8" High LED Display

#### 40 Series

- 1/8 DIN size (96 x 48 mm)
- 3 1/2 or 4 digit display
- Display hold function



### 1/32 DIN Size Meters

#### 43 Series

- 1/32 DIN size (48 x 24 mm)
- Easy-to-wire tension clamp connecting
- 24 Vdc powered or loop powered (no external power supply required)
- 43E Series with alarm output



### Ultra-slim Housing with Flat Rear Surface


#### 47NL Series

- 1/8 DIN size (96 x 48 mm)
- Large 16 mm-high, 4 or 4 1/2 digit display: Bright and colorful
- Mountable on standard 30 mm round panel cutout
- Tension-clamp or screw terminal block for electrical connection
- IP66 (except for magnet mounting)
- Moving average function to suppress display flickering
- High/low alarm trips



#### Mounting of Tension-clamp Terminal Block Type

- Using magnet



- Using screws



## Digital Panel Meters Selection Guide

APPLICATION	47NL	47L	47D	40	43
DC input, input loop powered	47NLN, 47NLNT	---	---	40DN	43AL1
DC input	47NLV, 47NLVT	47LYV, 47LV	47DV	40LV, 40DV1	43DV2, 43EV
Thermocouple input	---	47LT	47DT	40DT	---
RTD input	47NLR, 47NLRT	47LR	47DR	40DR	---
Potentiometer input	---	47LM	47DM	---	---
2-wire transmitter input (with excitation)	47NLDY, 47NLDYT	---	---	---	43EDY
Strain gauge input	---	47LLC, 47LLC2*	---	---	---
AC current / voltage input	---	47LAC	47DAC	---	---
PT input	---	47LPT	---	40DPT	---
CT input	---	47LCT	---	40DCT	---
Frequency input (AC line voltage)	---	47LHZ	---	---	---
Frequency input	---	47LPA	---	---	---
Pulse input totalizer (6 digits)	---	47LPQ	---	---	---

\*Under development as of November 2024

Four-wire Signal Conditioners

Two-wire Signal Conditioners

Power Monitoring Components

Indicators & Tower Lights

Remote I/O

Paperless Recorders & PC Recorder

Process & Temperature Controllers

IoT Components

Final Control Components

Lightning Surge Protectors

Sensors

About Us

## Bargraph Indicators

### 48N Series Bargraph Indicators

- 9/64 DIN size (36 x 144 mm)
- 101-segment, 3 mm wide LED
- Red, amber, green and blue colors
- Alarm and/or transmitter output optional
- Vertical or horizontal mounting
- Custom scale with no extra cost
- IP65 front panel
- Separable terminal block



**48NV / 48NV1**  
• Single or dual bars



**48NAV**  
• Single bar  
• Dual/quad alarm



**48NDV**  
• Single bar  
• Dual/quad alarm  
• 4-digit digital display

### 48SV2 Bargraph Indicator

- 18 x 72 mm size
- 51-segment LED
- Red, amber, green and blue colors
- Vertical or horizontal mounting
- Custom scale with no extra cost
- Zero & span adjustments at the front panel
- Separable terminal block optional



**48SV2**



APPLICATION	48NV	48NA	48ND
DC input, single channel	48NV-1 48NV1-1	48NAV	48NDV
DC input, dual channel	48NV-2 48NV1-2	---	---
DC input, transmitter output	---	48NAVA	48NDVA
4-20 mA input, excitation supply	---	48NAVD	48NDVD
Thermocouple input	---	48NAT	48NDVT
RTD input	---	48NAR	48NDR
Potentiometer input	---	48NAM	48NDM

## Field Indicators

### 6DV / 6DV-B Loop Powered Field Indicator

- 4-20 mA input loop powered
- No external power source required
- Scaling & linearization selectable via the front control buttons
- IP66 / IP67 field enclosure, aluminium or stainless steel
- ATEX Zone 0, FM Class I, II, III, Division 1 approvals



**6DV**



**6DV-B**

IP66/IP67



## W100 Weighing Indicator


### Automatic Quantitative Feeding Control

The W100 repeats precise and stable measurement of liquid or powder to perform a quantitative feeding control while displaying accurate weight values.



- 72 x 144 mm size
- Highly visible LCD with white characters
- Weighing functions: feeding and discharging
- Control functions: simple comparison or sequence control
- Weighing stability functions: digital low pass filter, moving average, stability detection, stable state filter
- Max. 32 preset values (CODE) can be registered.
- 12-point discrete outputs and 12-point discrete inputs
- IP65 front panel
- Modbus communication


#### Example of Discharge-weighing System Configuration

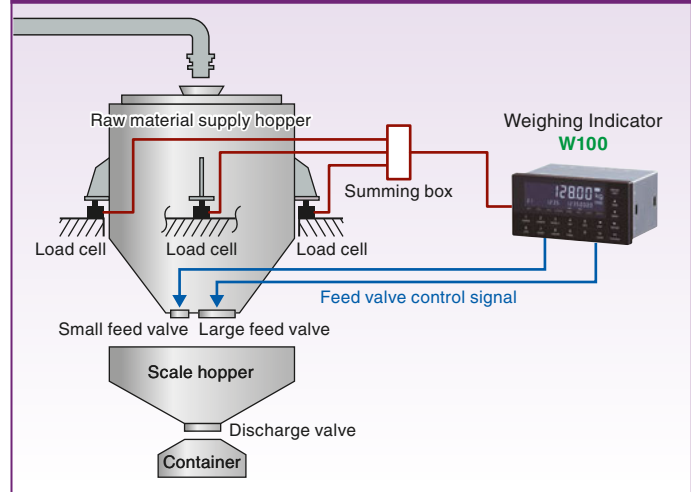

## IT Series Tower Lights

### Wireless & Open Network Capable Tower Lights

- Energy saving, maintenance free LED lights
- Bright and even illumination
- Direct Modbus/TCP and CC-Link control saves wiring and cost.
- Wireless LAN access point and infrastructure mode (IEEE 802.11b/g/n, 2.4 GHz) certified for use in the EU countries
- Licence-free 900 MHz ISM band, FCC Part 15 compliant wireless module certified for use in the US

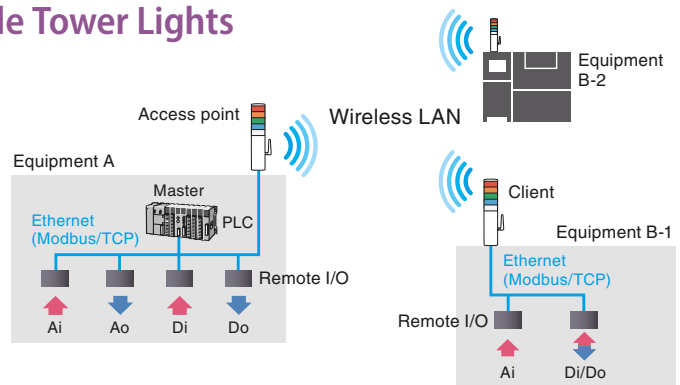

	WIRELESS LAN		900 MHz ISM BAND		OPEN NETWORK		DISCRETE INPUT		
	For EU countries		FCC Part 15 compliant						
	CE IP65		CE IP65		CE IP65		CE IP65		
LED DIAMETER	Bridge	Access point	Parent	Child	Modbus/TCP	CC-Link	Tall	Short	Pole mounting
40 mm	IT40SW1	IT40SW2	IT40SW5F	IT40SW6F	IT40SRE	IT40SRC	IT40SA1	IT40SA2	IT40SA3
50 mm	IT50SW1	IT50SW2	IT50SW5F	IT50SW6F	IT50SRE	IT50SRC	IT50SA1	IT50SA2	IT50SA3
60 mm	IT60SW1	IT60SW2	IT60SW5F	IT60SW6F	IT60SRE	IT60SRC	IT60SA1	IT60SA2	IT60SA3



The flexibility and scalability of our Remote I/O supports future system upgrades with full isolation between power-communication-I/O and between analog channels. Economical non-isolated analog modules are also selectable.

Applications include: signal concentrator, data collection in flow and level monitoring, injection molding monitoring and control, test stands and prototyping, glass furnace temperature control, pharmaceutical processes, semiconductor manufacturing equipment, assembly line discrete ON/OFF, and IoT equipment.

Four-wire Signal Conditioners

Two-wire Signal Conditioners

Power Monitoring Components

Indicators & Tower Lights

Remote I/O

Paperless Recorders & PC Recorder

Process & Temperature Controllers

IoT Components

Final Control Components

Lightning Surge Protectors

Sensors

About Us

Remote I/O

**Scalable I/O**  
with free combination of  
I/O, network and power  
supply

## LARGE NUMBER OF I/O POINTS

Multi-channel,  
Scalable Remote I/O

**R3 Series**



Hot Swappable Modules

Compact,  
Scalable Remote I/O

**R30 Series**



Compact size

Slice Type,  
Scalable Remote I/O

**R8/R80 Series**



Flexible Configuration without Base

## SMALL NUMBER OF I/O POINTS

Ultra-Slim,  
Scalable Remote I/O

**R6 Series**



Only 78 mm wide with 8 I/O modules

## LARGE NUMBER OF I/O POINTS

Compact,  
Multi-point Remote I/O

**R1 Series**



12-point Universal Input Module

## SMALL NUMBER OF I/O POINTS

Expandable,  
Compact Remote I/O


**R7 Series**



Attached with Discrete I/O  
Extension Module

Plug-in Remote I/O

**R10 Series**



I/O module Base  
Base Socket Mounted Module


**All-in-One I/O**  
with I/O, network and  
power supply in single  
package

## Multi-channel, Scalable Remote I/O


### R3 Series

- Wide selection of I/O modules including DC, AC, temperature, strain gauge, pulse trains, AC power, etc.
- 4 isolated to 16 non-isolated analog inputs per module
- Max. 64 discrete I/O per module
- Selections of AC power, CT and VT modules suitable for energy monitoring applications
- Dual redundant communication networks and power supplies

#### R3 Series

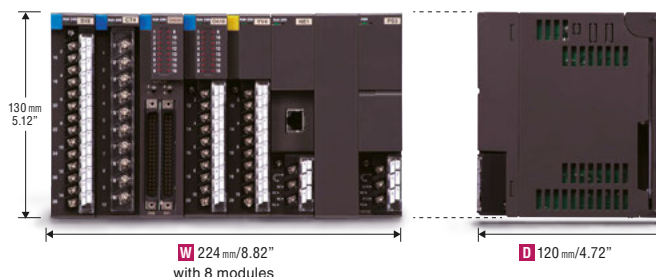

## Free Combinations of Network and I/O Modules on Backplane Base

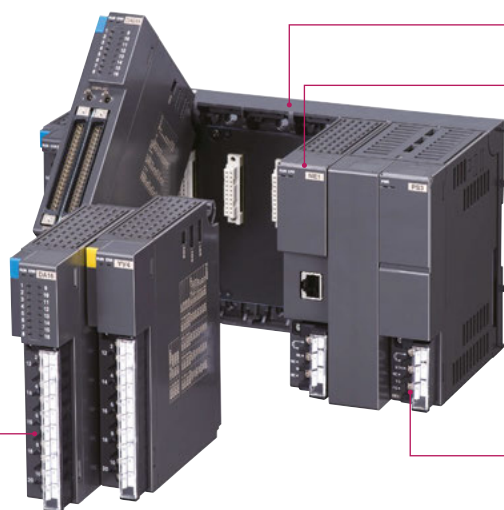

Backplane Base

Network Module



CC-Link IE Field

DeviceNet



Modbus

Modbus/TCP

EtherCAT

EtherNet/IP

MECHATROLINK  
MECHATROLINK - III

LONWORKS

FL-net

TLink

Power Supply Module

#### I/O Module

- |                                   |           |  |           |
|-----------------------------------|-----------|--|-----------|
| • DC input module . . . . .       | 24 models | • Alarm module . . . . .                         | 7 models  |
| • Sensor input module . . . . .   | 20 models | • Discrete I/O module . . . . .                  | 29 models |
| • AC power input module . . . . . | 16 models | • BCD I/O module . . . . .                       | 2 models  |
| • Analog output module . . . . .  | 7 models  | • Function module for air conditioning . . . . . | 2 models  |
| • Pulse I/O module . . . . .      | 13 models | • Temperature control module . . . . .           | 1 model   |

## Three Types of I/O Connections



**R3 Series**  
M3 screws  
M3.5 screws







**R3S Series**  
Tension-clamp  
terminal



**R3Y Series**  
FCN connector

## Dual Communication Networks and Power Supplies

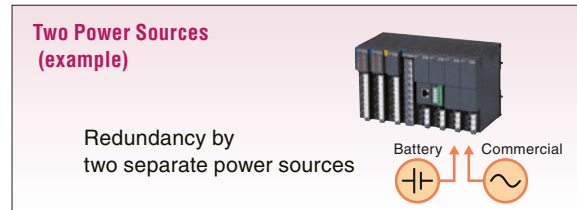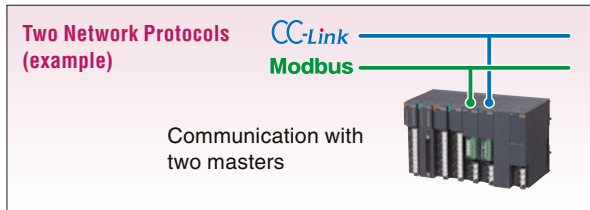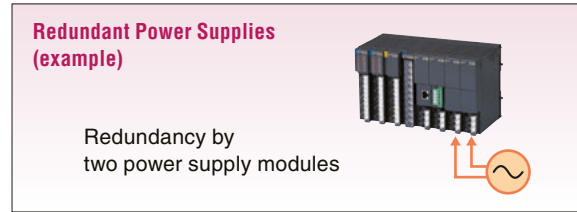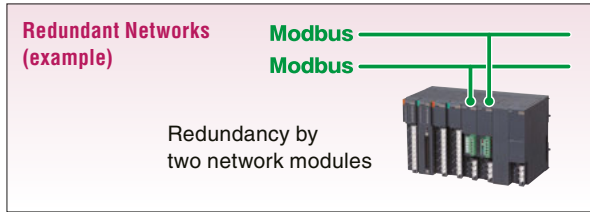

Four-wire Signal Conditioners

Two-wire Signal Conditioners

Power Monitoring Components

Indicators & Tower Lights

Remote I/O

Paperless Recorders & PC Recorder

Process & Temperature Controllers

IoT Components

Final Control Components

Lightning Surge Protectors

Sensors

About Us

## Compact, Scalable Remote I/O


### R30 Series

- Ethernet based network protocols
- High-speed internal bus
- 2 or 4 fully-isolated analog I/O per module
- 16 discrete I/O per module
- R3 Series I/O modules can be added by using special connecting base.




R30 Series + R3 Series I/O modules

### R30 Series

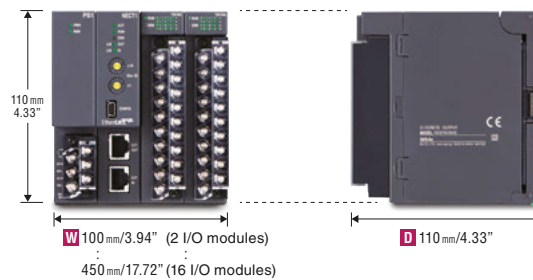


## Free Combinations of Network and I/O Modules on Backplane Base

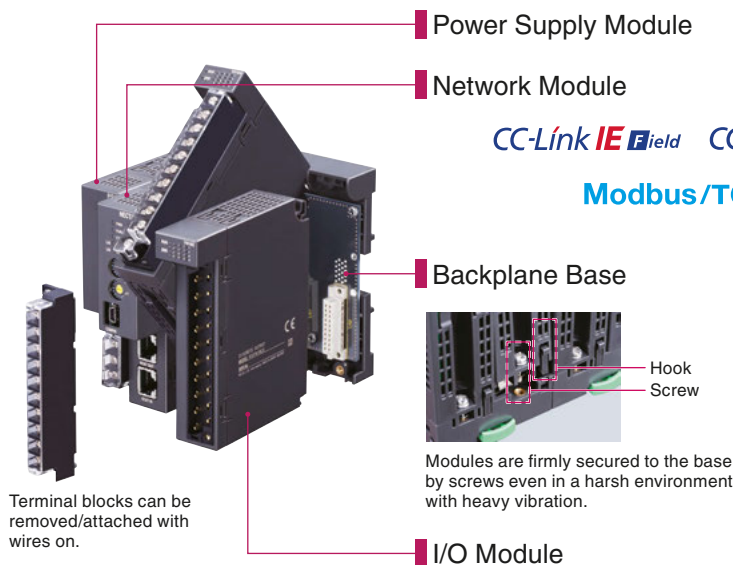

CC-Link IE Field CC-Link IE TSN EtherCAT<sup>®</sup>  
Modbus/TCP OPC UA


Internal Bus Communication Cycle  
1 millisecond per 256 points

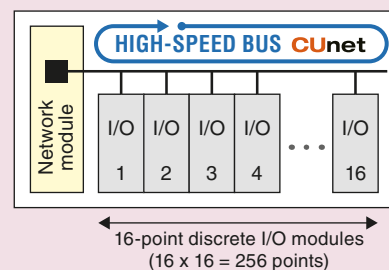


# Slice Type, Scalable Remote I/O

## R8 / R80 Series

- Slice type modules can be freely added by necessary number of I/O points, saving installation space to the minimum.
- Only 55 mm (2.17 in) deep modules (except connector)
- Interlock and other special function modules requested for semiconductor manufacturing equipment

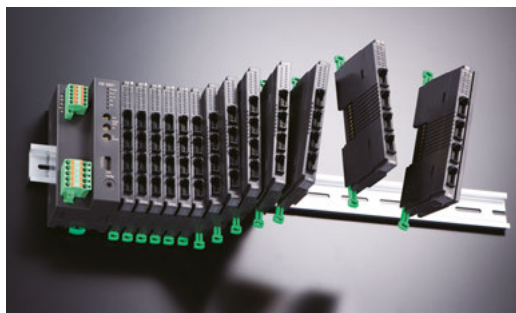


### R8 Series

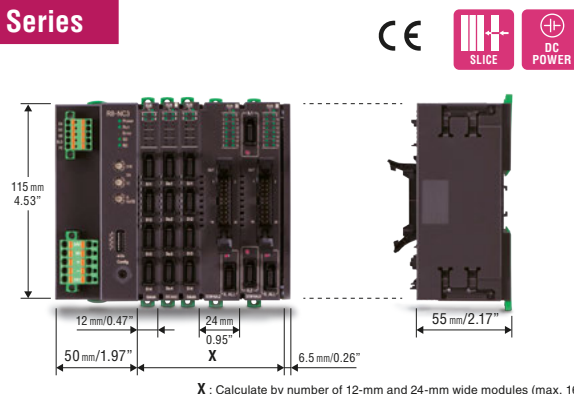


### R8 Series Networks




## R80 Series Realizes High-speed Internal Bus Communication

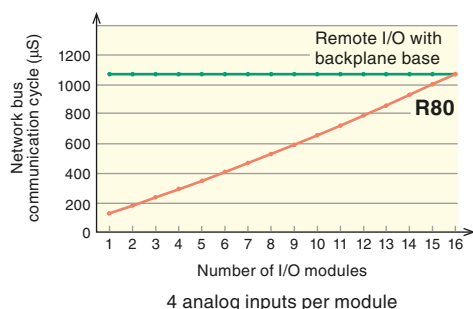


### Bus communication cycle: backplane base

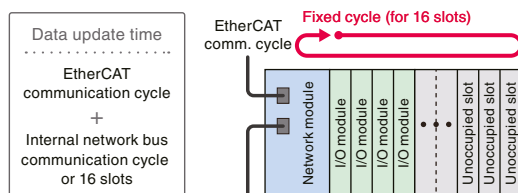

### Bus communication cycle: slice type I/O

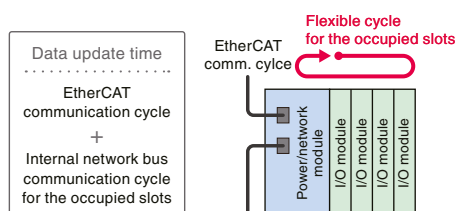


### R80 Series

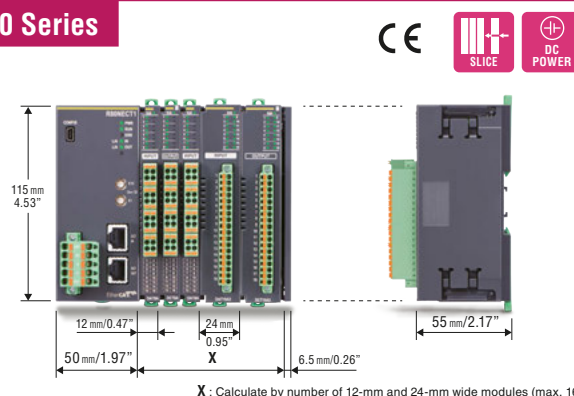

### R80 Series Networks



### I/O Connection Types

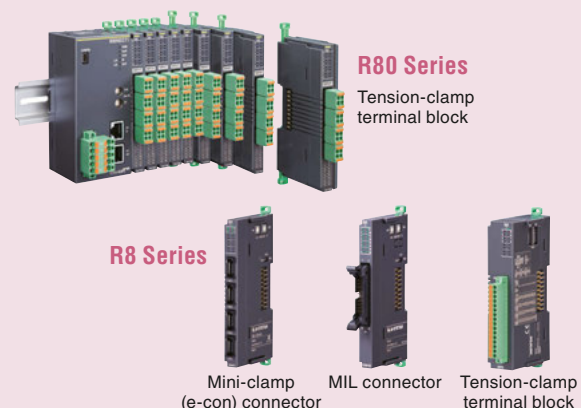



## Expandable, Compact Remote I/O

### R7 Series

- Palm-top size compact module can handle 4 analog input, 2 analog output or 16 discrete signals.
- 8 or 16 discrete input/output module can be attached to the base module.



CC-Link DeviceNet Modbus Modbus/TCP LONWORKS

MECHATROLINK T-Link FLEX NETWORK® HLS Hi-speed Link System

Four-wire Signal Conditioners

Two-wire Signal Conditioners

Power Monitoring Components

Indicators & Tower Lights

Remote I/O

Paperless Recorders & PC Recorder

Process & Temperature Controllers


IoT Components

Final Control Components

Lightning Surge Protectors

Sensors

### R7 Series

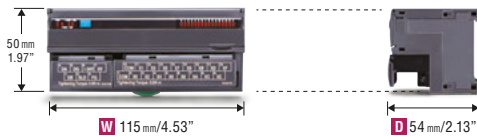

## Compact Remote I/O for FA Control Equipment

### R7 Series

- Compact, terminal block style, all-in-one modules
- 16-point, 32-point or 64-point DI, DO or I/O-mixed modules; analog I/O types are also available.
- Various I/O terminal styles are selectable.



CC-Link			CC-Link			
SERIES	EXTERNAL VIEW	I/O TERMINAL STYLE	I/O VARIATIONS, NUMBER OF CHANNELS			
R7F4DC		Mini-clamp connector (e-CON)	DI16	DO16	DI 8 DO8	
		Tension clamp terminal				
		One-touch connector				
R7F4HC		FCN connector	DI32	DO32	DI 16 DO16	

CC-Link IE Field			CC-Link IE Field			
SERIES	EXTERNAL VIEW	I/O TERMINAL STYLE	I/O VARIATIONS, NUMBER OF CHANNELS			
R7I4DCIE		M3 screw terminal				<div>AI</div> <div>Load cell input</div>

About Us

Four-wire Signal Conditioners

Two-wire Signal Conditioners

Power Monitoring Components

Indicators & Tower Lights

Remote I/O

Paperless Recorders & PC Recorder

Process & Temperature Controllers




IoT Components



Final Control Components


Lightning Surge Protectors



Sensors


About Us

DeviceNet			DeviceNet			
SERIES	EXTERNAL VIEW	I/O TERMINAL STYLE	I/O VARIATIONS, NUMBER OF CHANNELS			
R7F4DD		Tension clamp terminal	DI16	DO16	DI 8 DO8	
		Mini-clamp connector (e-CON)				
R7F4HD		MIL connector	DI32	DO32	DI 16 DO16	

EtherNet/IP			EtherNet/IP			
SERIES	EXTERNAL VIEW	I/O TERMINAL STYLE	I/O VARIATIONS, NUMBER OF CHANNELS			
R7F4HEIP		Tension clamp terminal	DI16	DO16	DI 8 DO8	
R7G4HEIP		M3 screw terminal	DI16	DO16		




EtherCAT			EtherCAT			
SERIES	EXTERNAL VIEW	I/O TERMINAL STYLE	I/O VARIATIONS, NUMBER OF CHANNELS			
R7I4DECT		Mini-clamp connector (e-CON)	DI32	DO32	DI 16 DO16	AI AO

Modbus			Modbus			
SERIES	EXTERNAL VIEW	I/O TERMINAL STYLE	I/O VARIATIONS, NUMBER OF CHANNELS			
R7K4FM		M3 screw terminal	DI32			
R7G4FM		M3 screw terminal	DI16			

Modbus/TCP			Modbus/TCP			
SERIES	EXTERNAL VIEW	I/O TERMINAL STYLE	I/O VARIATIONS, NUMBER OF CHANNELS			
R7K4FE		M3 screw terminal		DO16		

MECHATROLINK-III						
MECHATROLINK MECHATROLINK - III						
SERIES	EXTERNAL VIEW	I/O TERMINAL STYLE	I/O VARIATIONS, NUMBER OF CHANNELS			
R7K4FML3		M3 screw terminal	DI32	D032	DI 16 DO16	
R7K4JML3		Tension clamp terminal			DI 32 DO32	
R7G4FML3		M3 screw terminal or Mini-clamp connector (e-CON)	DI16	D016		
R7F4HML3		MIL connector			DI 16 DO16	
R7I4DML3		Mini-clamp connector (e-CON)	DI32	D032	DI 16 DO16	
R7G4HML3		M3 screw terminal				AI AO Load cell input and AI/AO
R7K4GML3		Tension clamp terminal			DI 16 DO16	

MECHATROLINK-I, -II						
MECHATROLINK MECHATROLINK - I, - II						
SERIES	EXTERNAL VIEW	I/O TERMINAL STYLE	I/O VARIATIONS, NUMBER OF CHANNELS			
R7K4FML		M3 screw terminal	DI32	D032	DI 16 DO16	
R7K4DML		Mini-clamp connector (e-CON)	DI32		DI 16 DO16	
R7G4HML		M3 screw terminal				AI AO

HLS						
HLS Hi-speed Link System						
SERIES	EXTERNAL VIEW	I/O TERMINAL STYLE	I/O VARIATIONS, NUMBER OF CHANNELS			
R7F4DH		Mini-clamp connector (e-CON), MIL connector, Tension clamp terminal	DI16	D016	DI 8 DO8 or DI 16 DO16 (MIL connector)	
R7K4DH		Mini-clamp connector (e-CON)			DI 16 DO16	
R7G4HH		M3 screw terminal				AI AO

Four-wire Signal  
Conditioners

Two-wire Signal  
Conditioners

Power Monitoring  
Components

Indicators &  
Tower Lights

Remote I/O

Paperless Recorders  
& PC Recorder

Process &  
Temperature  
Controllers

IoT Components

Final Control  
Components

Lightning Surge  
Protectors

Sensors

About Us

Four-wire Signal Conditioners

Two-wire Signal Conditioners

Power Monitoring Components

Indicators & Tower Lights

Remote I/O

Paperless Recorders & PC Recorder

Process & Temperature Controllers

IoT Components

Final Control Components

Lightning Surge Protectors

Sensors

About Us


## Wireless I/O System for IoT

- Convenient wireless converters/gateways to collect field sensor data
- Remote monitoring using your mobile terminals via the internet

### 900-920 MHz ISM Band Wireless System

- Modbus-RTU transparent
- License-free
- Multi-hop technology relaying signals over long distance

#### Wireless Gateway WL40 Series



#### Remote I/O R3 Series Modbus Interface Module R3-NMW1F




#### Tower Light ITxxSW5F ITxxSW6F

xx : 40, 50, 60



#### WLAN Tower Light ITxxSW1 ITxxSW2

xx : 40, 50, 60

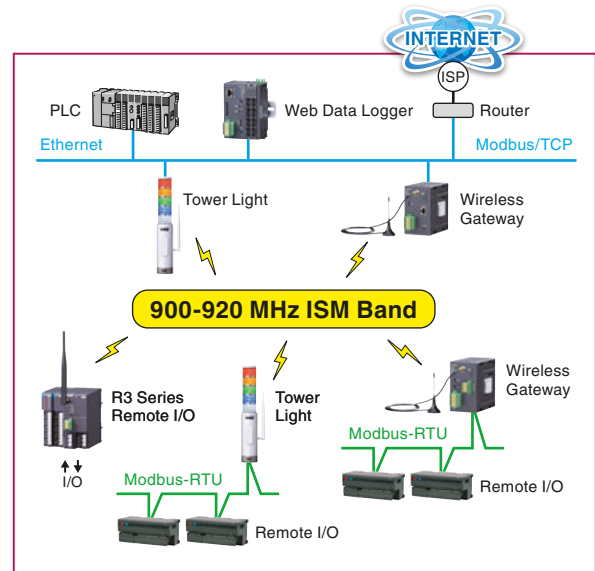


Use of wireless products is restricted by national radio regulations of individual countries. Please consult us for the details of certified products.

## BA8NS-CONV Single Pair Ethernet (SPE) Converter

LAN Cables can be Substituted by Twisted-pair Cables

- Transmitting max. 1000 meters <sup>(\*)</sup> (0.62 mile) in 10 Mbps data rate
- Existing spare twisted-pair cable may be used.

If you want to transmit Ethernet signals over 100 meters (109 yards), fiber optics cables are usually used. By using a pair of SPE Converters, expensive fiber optics cables and fiber media converters including installation work costs can be saved.

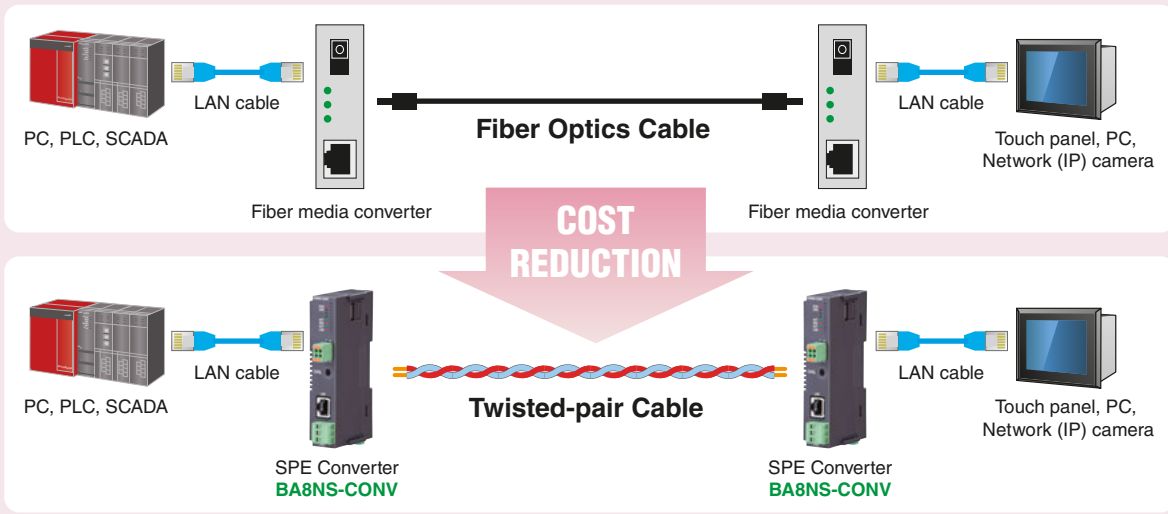

(\*) Standard defined value. Transmission distance depends upon cable categories and environment.




# Components for Building Automation

The central HVAC (Heating, Ventilation and Air Conditioning) control system is an air-conditioning system, in which a heat source system, including boilers, chillers, and conveying pumps concentrated in one place, produces and sends chilled water, hot water, or steam to the heat exchangers, e.g. air handling units (AHUs) and fan coil units (FCUs) on each floor, thus performing the cooling or heating of the entire building.

We developed Direct Digital Controller (DDC) and remote I/O modules specialized for building automation.

**Some products are only available in Japanese market. Please consult us for further information.**

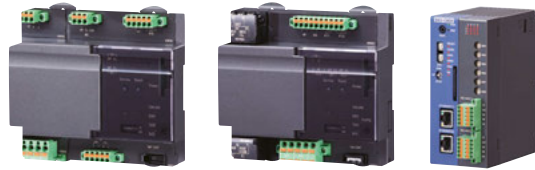


Four-wire Signal Conditioners

Two-wire Signal Conditioners


Power Monitoring Components

Indicators & Tower Lights

## Open Network for Air-Conditioning Control System

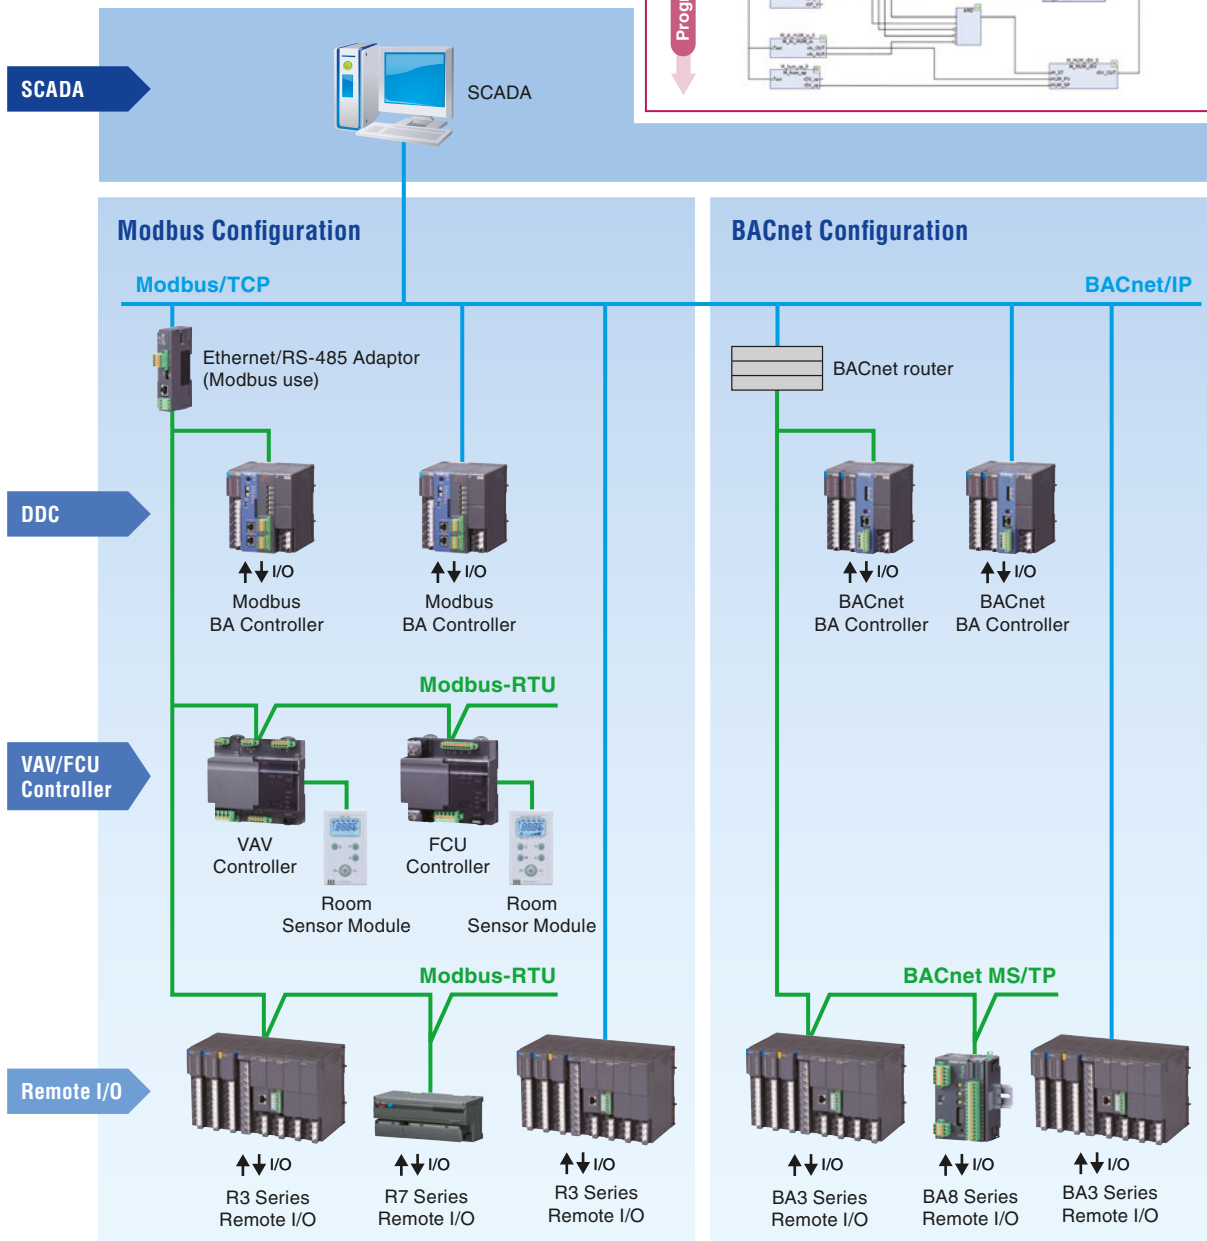

### Function Block Programming for DDC

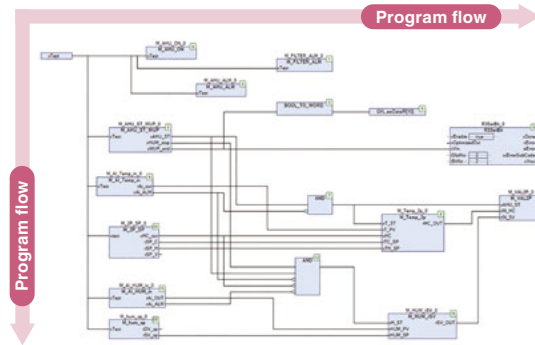

Remote I/O

Paperless Recorders & PC Recorder

Process & Temperature Controllers

IoT Components

Final Control Components

Lightning Surge Protectors

Sensors

About Us

Four-wire Signal Conditioners

Two-wire Signal Conditioners

Power Monitoring Components

Indicators & Tower Lights

Remote I/O

Paperless Recorders & PC Recorder

Process & Temperature Controllers

IoT Components

Final Control Components

Lightning Surge Protectors

Sensors

About Us

## TR30-G Tablet Recorder Web-enabled DAQ System

- Compact package
- No need of dedicated application software other than a web browser
- Flexible built-in I/O modules plus extended Modbus slave I/O
- Large main memory plus auxiliary SD card
- Regular and event e-mailing
- FTP server and client
- Modbus/TCP master and slave
- SNMP client
- User's original browser view



H 110 mm  
4.33"

D 98 mm  
3.86"



Model TR30-G is a web-based data acquisition system enabling users to view and access stored data via an internet browser. Freed from a dedicated display screen, accessibility and portability of the data is greatly enhanced.

The maximum usable I/O points are:

- 64 analog inputs (16-bit data)
- 64 discrete inputs
- 64 discrete outputs
- 32 pulse inputs (32-bit data)
- 32 function inputs

At the maximum of 120 channels can be plotted on the charts and stored at the storing cycle of 1 minute.

The fastest storing cycle is 5 milliseconds for 16 channels, 100 milliseconds for 32 channels.


## Freedom from dedicated display screen — Enhanced data accessibility and portability

### PLANT FIELD MAINTENANCE

Operators can bring in tablets and smart phones to access trend data while freely walking around the site. Data can be transferred to PC via FTP or via SD card.

### TEST AND RESEARCH


Researchers can access data logged at a test lab in a remote building while working in their own office.

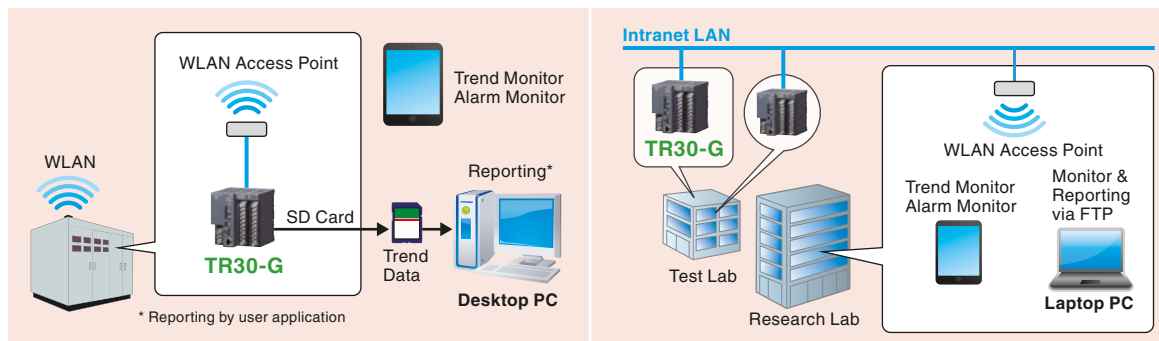

## PC Recorder

### Paperless Recorder that is as Easy to Use as a Digital Multimeter

- USB Type-C bus powered: no external power supply needed
- Event-triggered recording
- Enhanced screens on a web browser: Trend View plus Overview, Event View and Report File Display

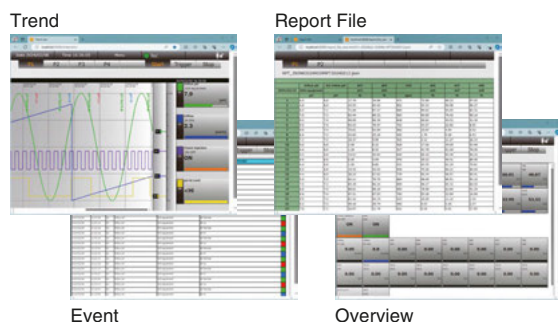

Four-wire Signal Conditioners

Two-wire Signal Conditioners

Power Monitoring Components

Indicators & Tower Lights

Remote I/O

Paperless Recorders & PC Recorder

Process & Temperature Controllers

IoT Components

Final Control Components

Lightning Surge Protectors

Sensors

About Us

## 73VR Series Paperless Recorder

- Touch panel operated 5.5 inch TFT color LCD display
- 144 mm square DIN standard panel size
- Data can be transferred in real time to the host PC via Ethernet, viewed and stored on the MSR128 PC Recorder program.

IP65



FUNCTION	MODEL	CE	MAX. INPUT	FEATURES
Remote I/O acquisition	73VR1100	CE	128 points	Installation flexibility, fitting in the tight space of a control panel or machinery chassis
Built-in universal input	73VR2100	CE	12 points	Universal input: independent input type and range selectable per channel
Selectable I/O modules	73VR3100	---	64 points	Compatible with various open networks to communicate with major PLC

## Compact Paperless Recorder

### 71VR1 Series

- 1/4 DIN size (96 x 96 mm) panel mount compact recorder
- 3.5 inch TFT color LCD display
- Direct field inputs at the built-in terminals and optional remote inputs via Modbus RTU



CE IP65

FUNCTION	MODEL	BUILT-IN AI	REMOTE AI	Di / Do
Remote I/O	71VR1-E001	---	Ai x 8	Di x 2
DC input	71VR1-E101	DC x 2	Ai x 6	Do x 2 (built-in)
Universal input	71VR1-E501	Universal x 3 DC x 2	Ai x 3	Di x 6 Do x 6 (remote)

## Ultra-compact Paperless Recorder

### VR4896E-G2



CE IP55

- 1/8 DIN size (48 x 96 mm) panel mount ultra-compact recorder
- 100 milliseconds sampling intervals
- 2 x DC voltage inputs; 1 x Di for trigger input, 1 x Do for alarm output

# PROCESS & TEMPERATURE CONTROLLERS

## SC100/SC200 Series Multi-Function PID Controller

- Two loops of PID control
- 2 x universal inputs, 4 x analog inputs, 5 x contact or pulse inputs, 1 x high speed pulse input
- DCS in instrument format: 2 PID blocks, 48 computation blocks and 12 sequential control blocks; Expansion model with doubled computation blocks are also available.
- Auto tuning function
- Ideal for replacing existing instruments
- High reliability for demanding process use — Built-in manual loader with enhanced security features
- Host communication via Modbus Ethernet TCP/IP or RS-485 RTU
- Peer-to-peer communication via NestBus to expand number of I/Os



CE  
IP55

FUNCTION	MODEL
Basic version	SC100
Modbus/Nestbus extension	SC200 SC200W
Basic version with manual loader	SC110
Modbus/Nestbus extension with manual loader	SC210 SC210W
Pulse width output	SC200D

## Highly Visible Color Graphic LCD Intuitive Touch Panel Operation



## TC10 Series Temperature Controller

- Universal input configurable to T/C, RTD, DC current or voltage independently
- Discrete input for remote trigger (TC10NM, TC10EM)
- Clamp-on current sensor input to detect wire breakdown or overload
- Modbus-RTU slave



**TC10CM**  
• 1/16 DIN size  
• One PID loop

CE  
IP66



**TC10NM**  
• 1/8 DIN size  
• One PID loop

CE  
IP65



**TC10EM**  
• 1/4 DIN size  
• Two PID loops

CE  
IP65




## DL8 Series Web Enabled Remote Terminal Unit

### Use Internet and Your Smartphone to Build Up Remote Monitoring System


- Simple remote monitoring via the internet without needing to build up a complex PC based system
- Pre-installed user-friendly browser views for remote data access through smartphones or tablets
- Event and regular reporting by e-mails
- Local data stored in an SD card memory
- Various network protocols are usable: TCP/IP, HTTP/HTTPS server, FTP/FTPS client and server, SMTP client, Modbus/TCP master and slave.
- R8 Series remote I/O modules available to accept a wide variety of field signals




### Web Browser Views Designed for Mobiles

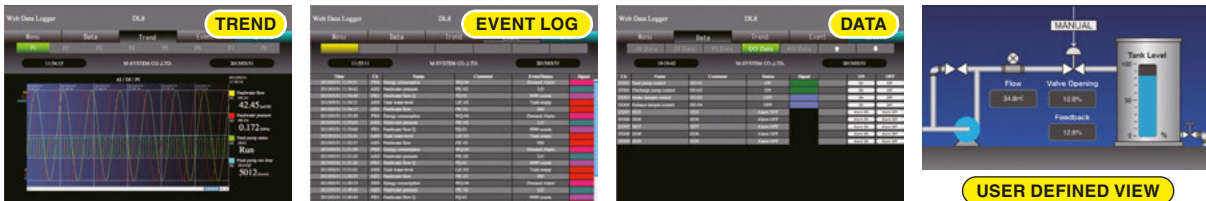


### Enhanced Functions with Flexible Configurations

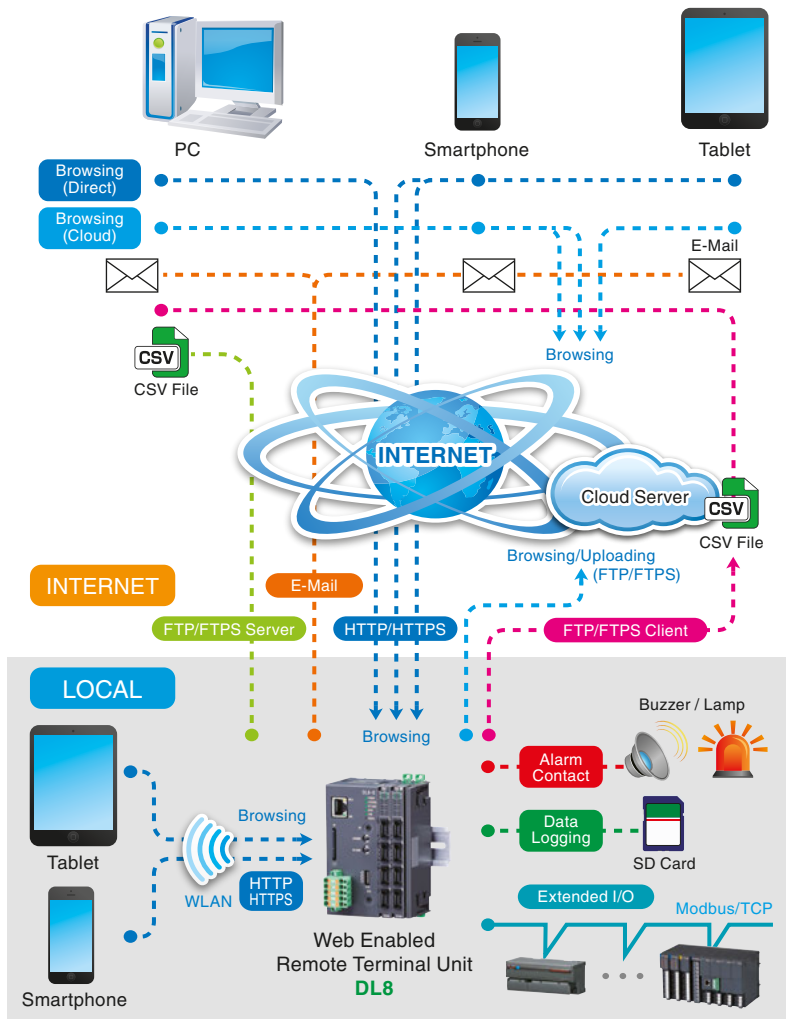

### LAN / INTRANET SYSTEM CONFIGURATION

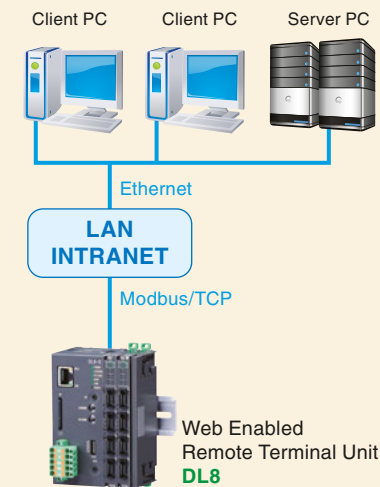

### MODBUS-RTU EXTENSION VIA GATEWAY MODULE

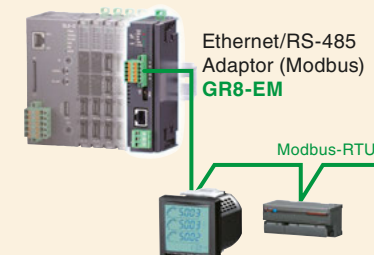

Four-wire Signal Conditioners

Two-wire Signal Conditioners

Power Monitoring Components

Indicators & Tower Lights

Remote I/O

Paperless Recorders & PC Recorder

Process & Temperature Controllers

IoT Components

Final Control Components

Lightning Surge Protectors

Sensors

About Us

Four-wire Signal Conditioners

Two-wire Signal Conditioners

Power Monitoring Components

Indicators & Tower Lights

Remote I/O

Paperless Recorders & PC Recorder

Process & Temperature Controllers

IoT Components

Final Control Components

Lightning Surge Protectors

Sensors

About Us


## DL30-G Web Data Logger

### Edge Computing Remote Terminal Unit for IoT Era

- Max. 128-point data logging in CSV format
- Large main memory capable of storing data for over 10 years; plus auxiliary SD card memory
- Event and regular reporting by e-mails
- Pre-installed user-friendly browser views for remote data access through smartphones or tablets
- Various network protocols are usable: TCP/IP, HTTP/HTTPS server, FTP/FTPS client and server, Modbus/TCP master and slave, SMTP client, SNTIP client, SLMP master.
- Analog/digital function registers available for arithmetic processing of I/O measurement values
- R30 Series remote I/O modules available to accept a wide variety of field signals



### Communication Control for Logging, Monitoring and Reporting

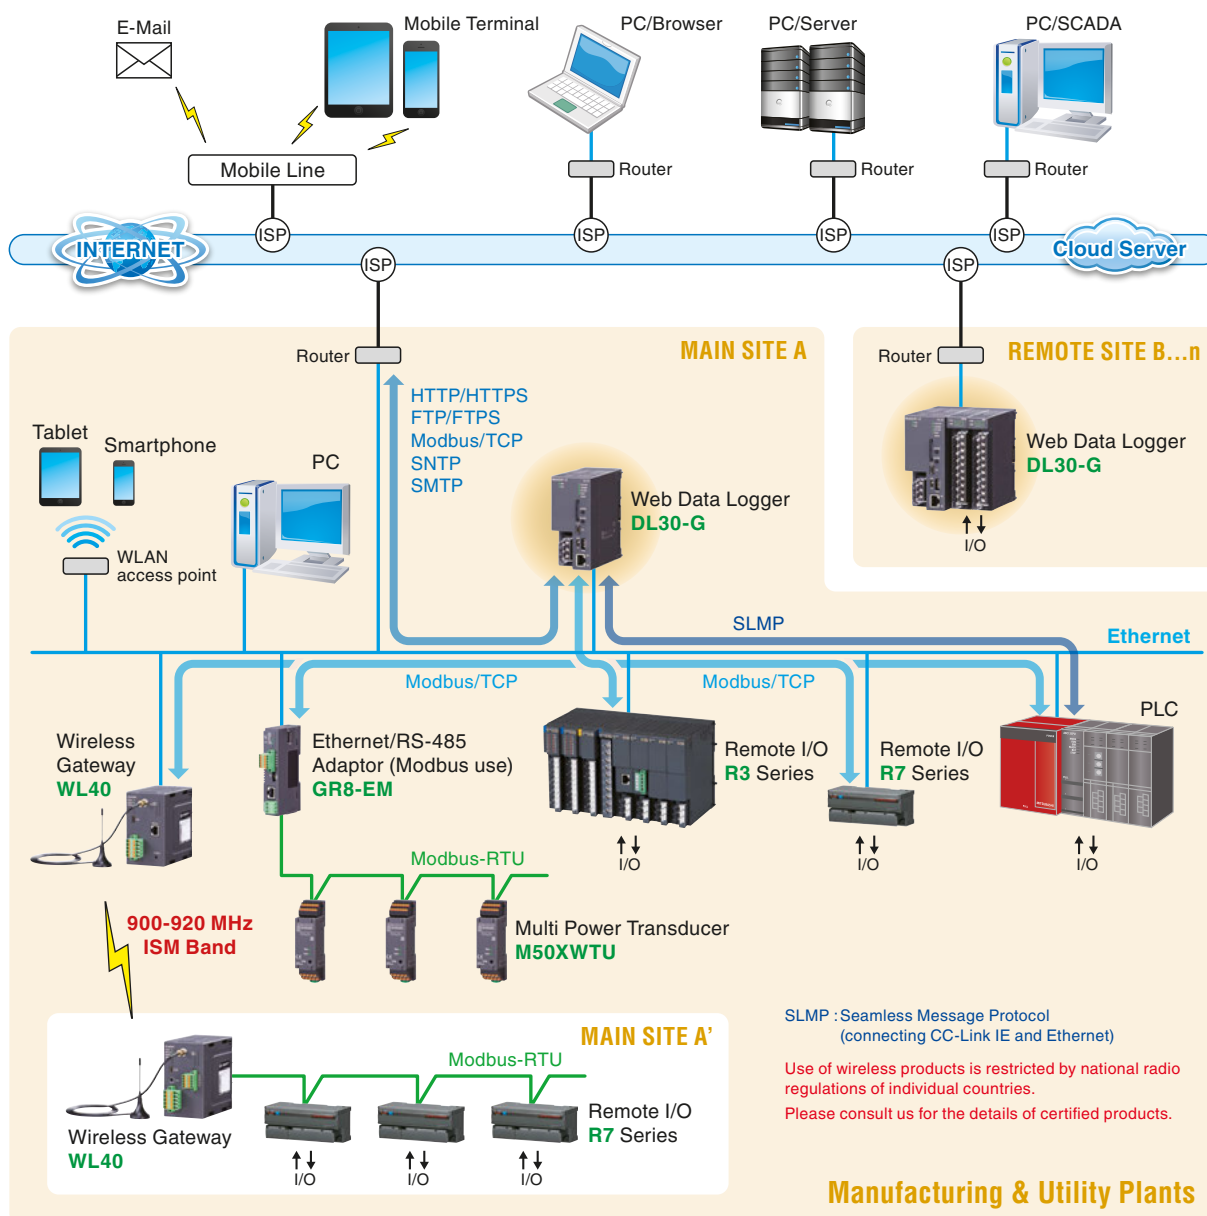

## Extensive Functions with Convenient Web Browser Views: No Application Software is Required

### Main Memory Capable of Storing Data for Over 10 Years

The DL30-G can save at the maximum of 128 points of analog/discrete signal data and events in its large main memory. Files are regularly copied to the SD card as backup.

Various arithmetic functions can be applied to I/O measurement values and the results are saved locally.

Data can be uploaded to a host device via FTP (or FTPS).




### Event/Regular E-mail Attached with Report Files

Events such as data abnormalities or machine status (Run-Stop) can be notified by e-mails. Regular data reporting is also possible.

Notification calendar can be customized to suppress mailing on holidays.

Preformatted spreadsheet report files can be attached to mails.




### Web Server for Remote Monitoring

The DL30-G has a web server function equipped with various standard monitoring windows:

- Trend graph
- Data display
- Event log
- Spreadsheet report
- Download

Graphic windows can be created by describing HTML and JavaScript.



### Extensive Communication Control

The DL30-G supports various network protocols including those as master/server station, enabling users to build a local stand-alone data logging and basic edge computing system without needing a host PC.

- HTTP/HTTPS server
- FTP/FTPS client and server
- Modbus/TCP master and slave
- SMTP client
- SNMP client (automatic time adjustment)
- SLMP master

## RGP30 Remote Graphic Panel

### Easy Visualization of Manufacturing Plant Operations


The RGP30 is "a graphic panel without dedicated display" which enables users to freely choose a display device suitable for their applications.

It generates web browser screens showing various kind of data imported from PLCs, remote I/Os, IoT devices and CCTV cameras.

The dedicated graphic designing tool, RGP-Designer, is used to build display panel designs with multiple inline windows and original graphics using graphical parts from the component library.






### Commercially Available Large Displays with Cost Performance Can be Connected through HDMI Port

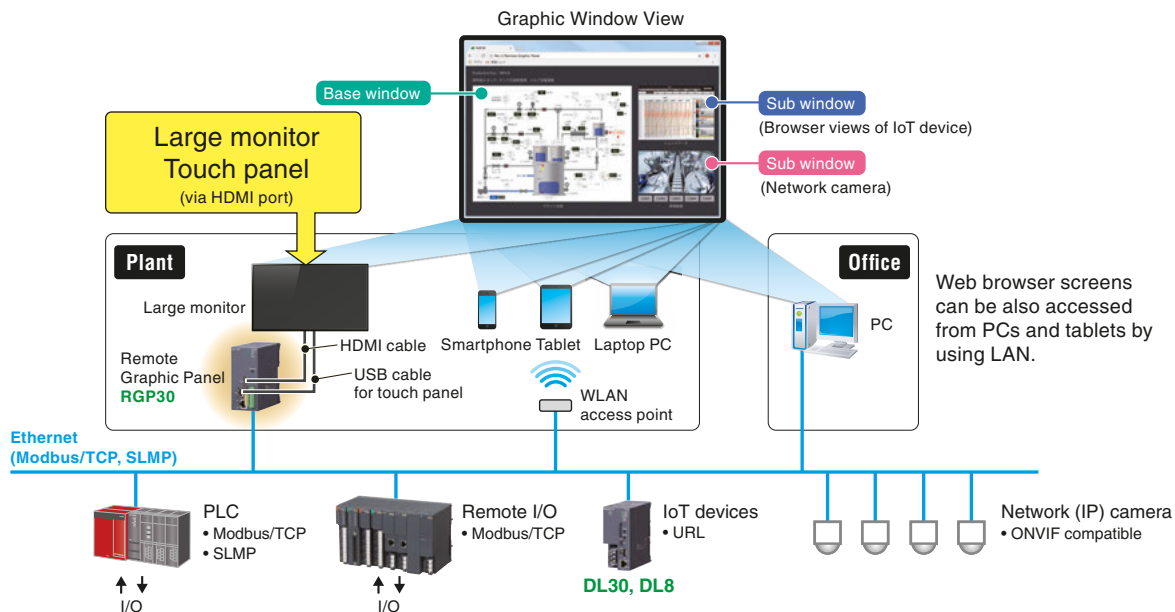

# FINAL CONTROL COMPONENTS

## Linear and Rotary Motion Electric Actuators for Valves and Machinery

Four-wire Signal Conditioners
Two-wire Signal Conditioners
Power Monitoring Components
Indicators & Tower Lights
Remote I/O
Paperless Recorders & PC Recorder
Process & Temperature Controllers
IoT Components
Final Control Components
Lightning Surge Protectors
Sensors

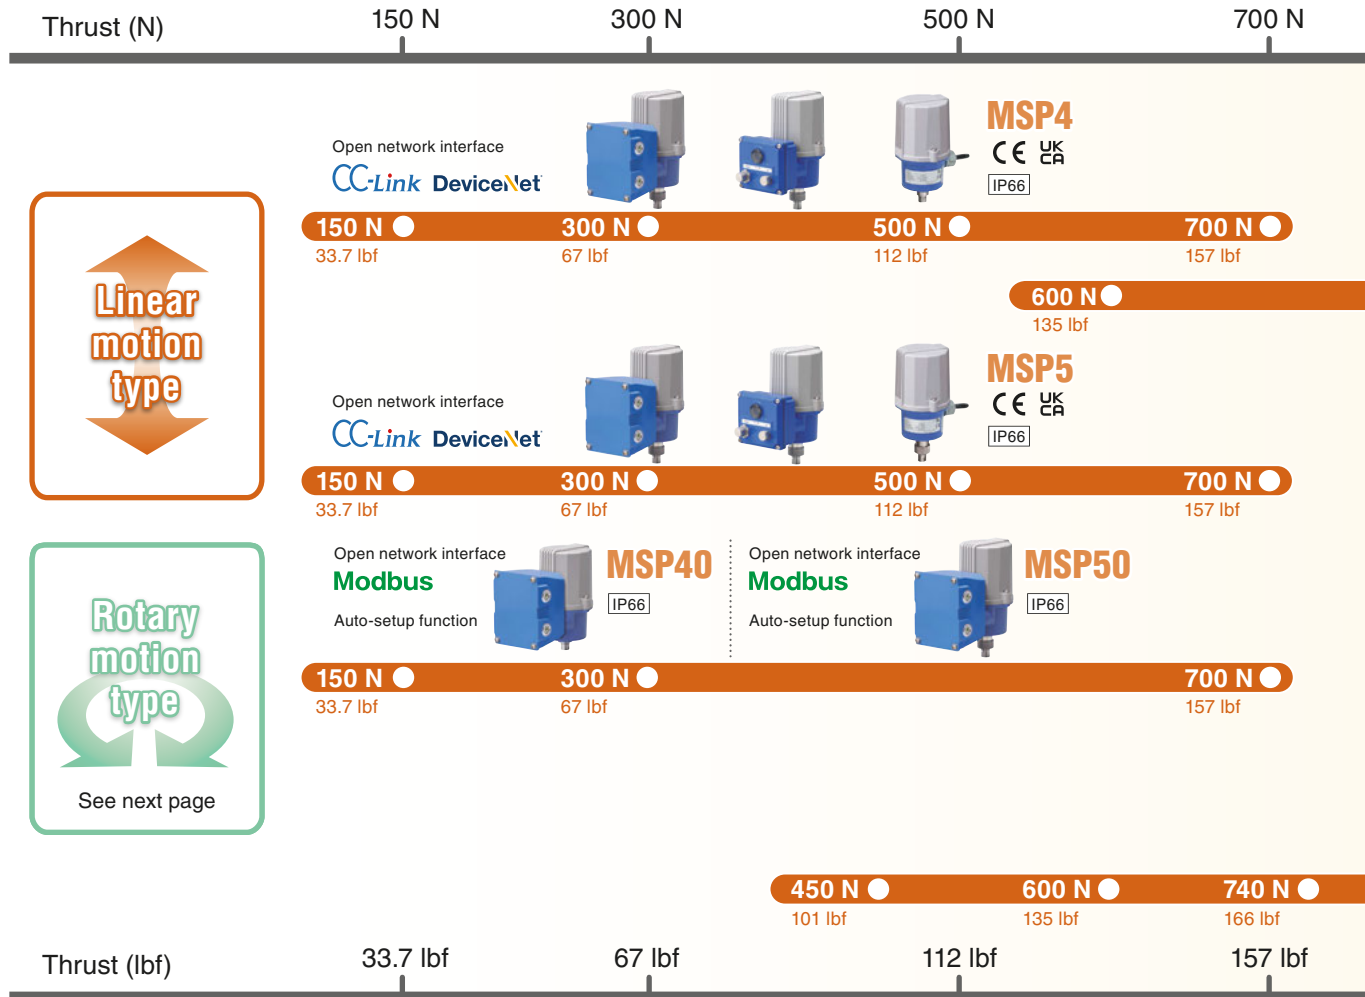

## MSP10 / PSP10 / PSP20 Linear Motion Electric Actuator

- Stepping motor drive
- High-speed operation control with 1/1000 resolution
- Auto-setup function makes the initial adjustment work simple and quick.
- 4-20 mA output plus Modbus-RTU communication for control and maintenance
- Thrust buffering by built-in coil spring at both ends of stroke
- Terminal box with transparent cover equipped with operating status indicator LEDs
- Operator access to the terminal box only



MSP10


**Thrust, Stroke and Travel Time (examples)** Travel time is field-programmable.

MSP10							
STROKE	THRUST						
	450 N	600 N	740 N	780 N	1200 N	1400 N	2500 N
10 mm (0.39")	2 s	2.5 s	3.3 s	4.2 s	4 s	6 s	7.4 s
20 mm (0.79")	3.2 s	4 s	5.7 s	7.4 s	7 s	8.4 s	13.5 s
40 mm (1.57")	5.2 s	7 s	10.4 s	13.9 s	13 s	16.5 s	25.5 s


PSP10		
STROKE	THRUST	
	1400 N	2400 N
20 mm (0.79")	5.6 s	5.6 s
40 mm (1.57")	8.4 s	8.4 s

PSP20		
STROKE	THRUST	
	2400 N	3700 N
40 mm (1.57")	14 s	14 s
60 mm (2.36")	19 s	19 s

### Easy Commissioning by Auto-Setup

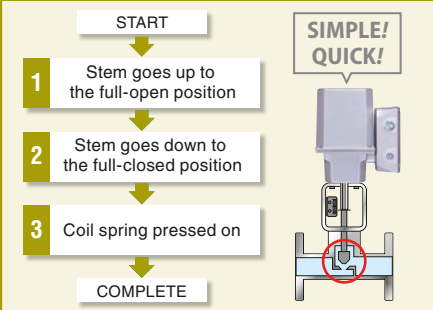



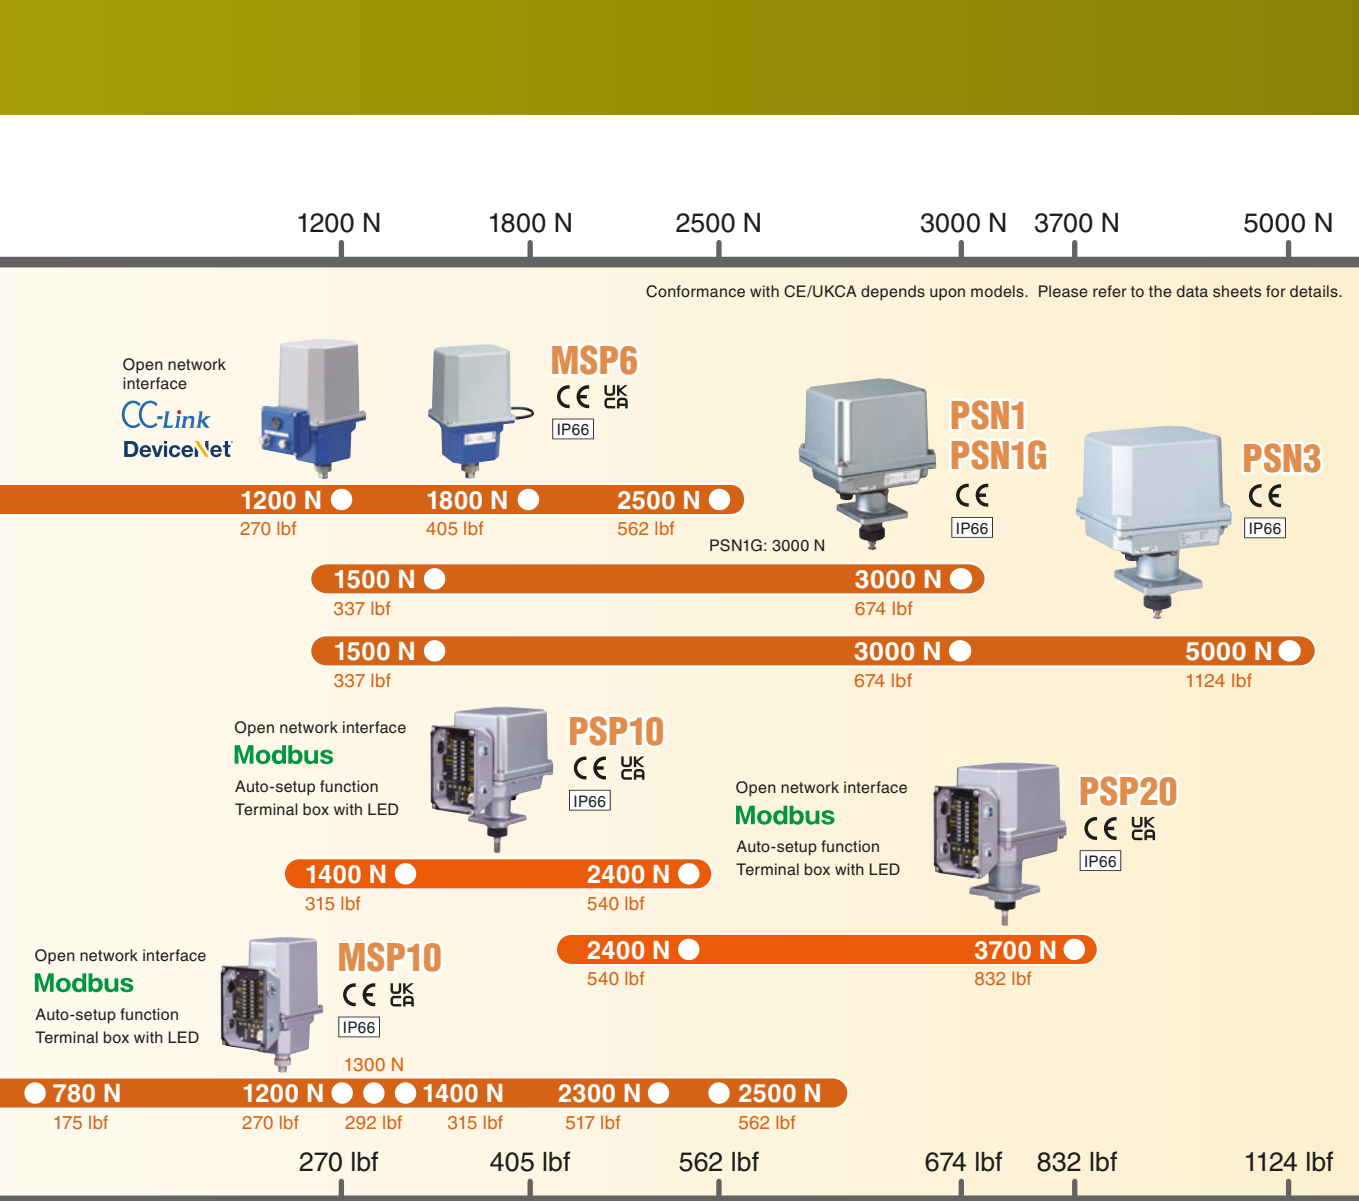

Four-wire Signal Conditioners

Two-wire Signal Conditioners

Power Monitoring Components

Indicators & Tower Lights

Remote I/O

Paperless Recorders & PC Recorder

Process & Temperature Controllers

IoT Components

Final Control Components

Lightning Surge Protectors

Sensors

About Us

## MSP Series

- Max. rated thrust: 2500 N (562 lbf)
- Max. stroke: 40 mm (1.57 in)



- ▮ Compact size
- ▮ High resolution positioning for superior control
- ▮ Built-in feedback positioner and electric limiter
- ▮ Brushless stepping motor assures long life operation.
- ▮ Optional network interface with CC-Link, DeviceNet and Modbus

## PSN Series


- Max. rated thrust: 5000 N (1124 lbf)
- Max. stroke: 60 mm (2.36 in)



- ▮ Brushless angle sensor eliminates problems with mechanical potentiometer feedback sensing
- ▮ Opening/closing speed, split range and failsafe position programmable by hand-held programmer
- ▮ Internal temperature sensor to control heater in cold climate and to prevent motor from overheating
- ▮ Forced-open/-closed contacts for remote or manual override

# Linear and Rotary Motion Electric Actuators for Valves and Machinery

Four-wire Signal Conditioners
Two-wire Signal Conditioners
Power Monitoring Components
Indicators & Tower Lights
Remote I/O
Paperless Recorders & PC Recorder
Process & Temperature Controllers
IoT Components
Final Control Components
Lightning Surge Protectors
Sensors

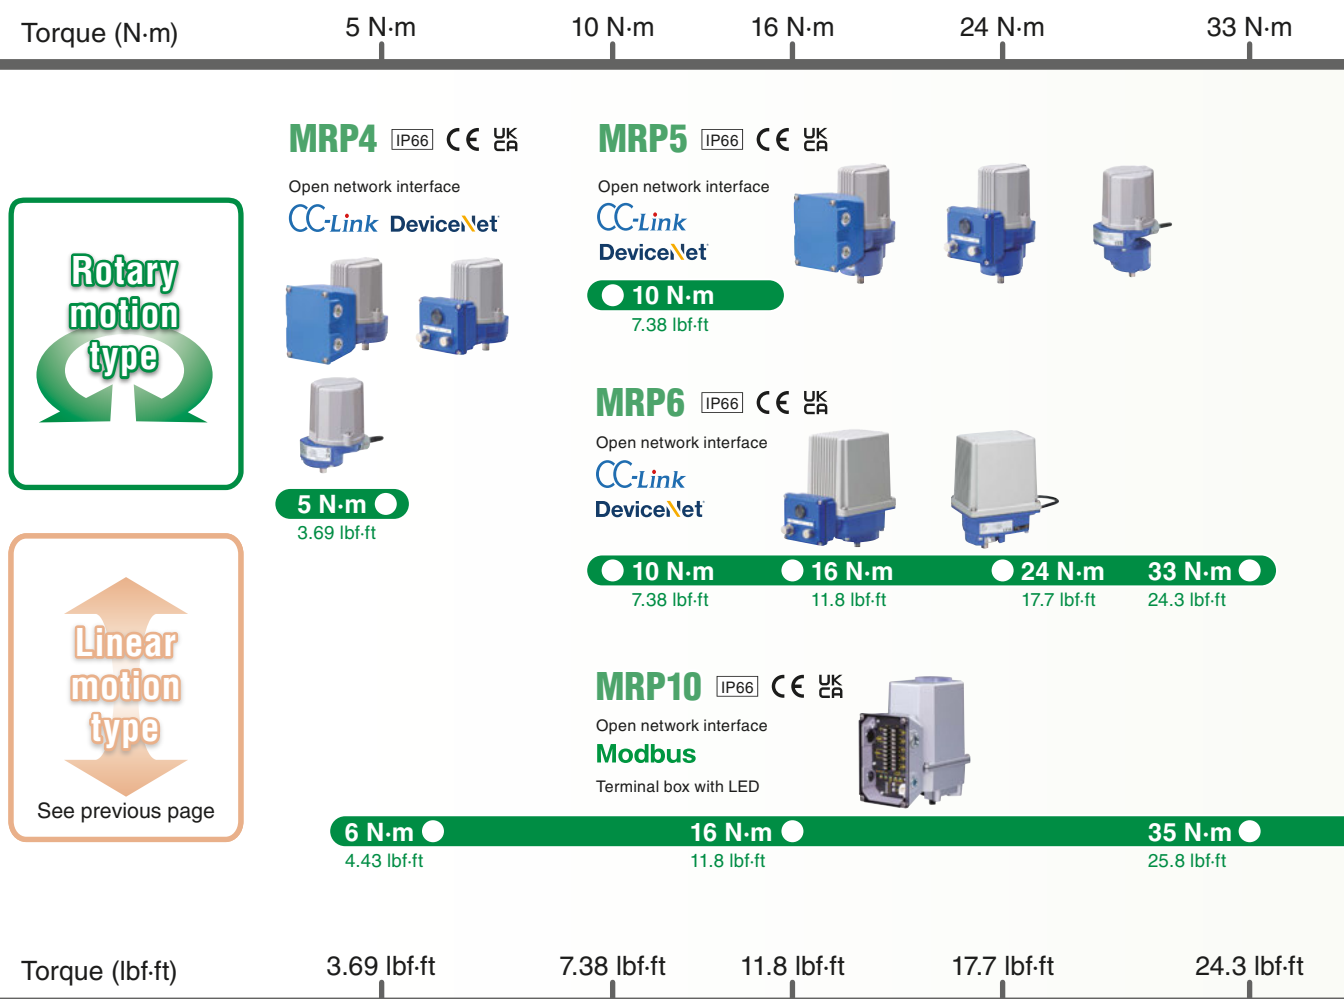

## MRP10 Rotary Motion Electric Actuator

- Max. rated torque: 50 N·m (36.9 lbf·ft)
- Max. turn: 90°

### Torque and Travel Time (examples)

Travel time is field-programmable.

MRP10	
TORQUE	TRAVEL TIME 90°
6 N·m (4.43 lbf·ft)	2.5 s
16 N·m (11.8 lbf·ft)	3.5 s
35 N·m (25.8 lbf·ft)	7.5 s
50 N·m (36.9 lbf·ft)	9.5 s

CE  
UK  
CA  
IP66



MRP10

- ▮ Stepping motor drive
- ▮ High-speed operation control with 1/1000 resolution
- ▮ 4-20 mA output plus Modbus-RTU communication for control and maintenance
- ▮ Terminal box with transparent cover equipped with operating status indicator LEDs
- ▮ Operator access to the terminal box only

## MRP Series

- Max. rated torque: 33 N·m (24.3 lbf·ft)
- Max. turn: 90°

CE  
UK  
CA  
IP66



MRP4

- ▮ Compact size
- ▮ High resolution positioning for superior control
- ▮ Brushless stepping motor assures long life operation.
- ▮ Optional network interface with CC-Link, DeviceNet and Modbus

70 N·m      100 N·m      200 N·m      600 N·m

Conformance with CE/UKCA depends upon models. Please refer to the data sheets for details.



100 N·m  
73.8 lbf·ft



200 N·m  
148 lbf·ft



600 N·m  
443 lbf·ft

50 N·m  
36.9 lbf·ft

51.6 lbf·ft      73.8 lbf·ft      148 lbf·ft      443 lbf·ft

Four-wire Signal Conditioners

Two-wire Signal Conditioners

Power Monitoring Components

Indicators & Tower Lights

Remote I/O

Paperless Recorders & PC Recorder

Process & Temperature Controllers

IoT Components

Final Control Components

Lightning Surge Protectors

Sensors

About Us

## PRP-0 / PRP-1

1/1000 Resolution, Quarter Turn in 8.5 Sec.

- Max. rated torque: 200 N·m (148 lbf·ft)
- Max. turn: 90°



Lloyd's Register approved type available (ENV3)



## PRP-2

Max. 600 N·m, Compact Size

- Max. rated torque: 600 N·m (443 lbf·ft)
- Max. turn: 90°




## Two-wire Position Transmitters

VOS2T / VOS2T-R


- Detecting mechanical position of pneumatic and electric actuators to send a proportional 4-20 mA signal
- Linear motion type ( $\pm 22.5^\circ$ ) or rotary motion type ( $\pm 45^\circ$ )
- Brushless design for long lasting reliability
- Lightweight & compact

## Remote Monitoring of Pneumatic Control Valve Position

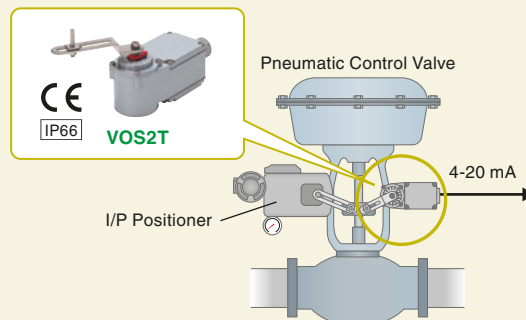


## MD7 Series Ultra-slim Lightning Surge Protectors

- High density mounting with 7 mm (0.28 in) wide modules
- Excellent protection by multi-stage SPD
- Max. discharge current 20 kA (8/20  $\mu$ sec)
- Independent shield terminal (3 for signal, 1 for shield)
- Floating mode for the shield selectable to avoid ground loops
- Optional loop disconnect fuse for 4-20 mA signal line to separate the MD7 failed in shortcircuit mode, to protect other devices
- DIN rail mounting / grounding
- Conforms to IEC 61643-21, Categories C1, C2, D1

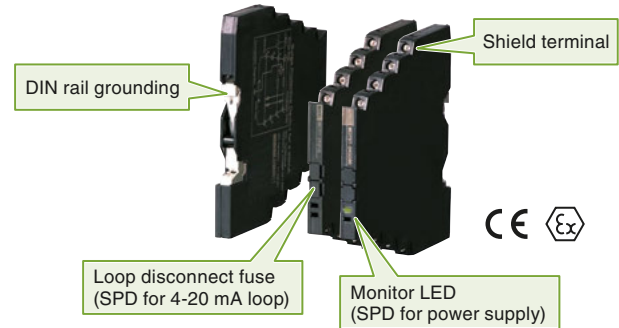

### MD7 Series

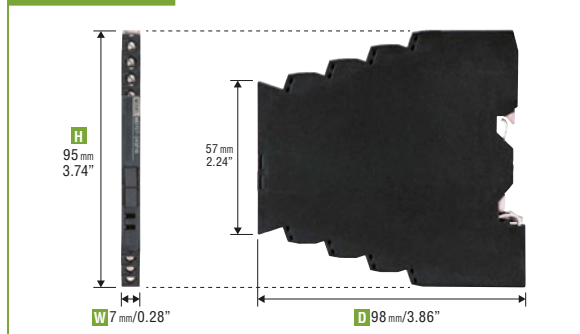

## MDP Series

### Plug-in Base Mounted

- Light-weight, easy-to-handle, plug-in construction
- Excellent protection by multi-stage SPD
- Head element can be removed and tested without disconnecting wires.
- Base socket connects input/output signals when the head element is removed.
- Wall or DIN rail mounting (with adapter A-33)



## Battery Powered Health Testing

### MD7AST / MDP-24

- Protects 4-20 mA & pulse signals
- Battery powered life monitoring function
- 'Check' button with indicators alerting panel inspectors of the surge protector's health



### Life indicator LEDs show surge protector's life status.

BAT	ALM	Battery	Discharge element	Voltage limiter	Replacement
ON	ON	Normal	Near end	Normal	Near
ON	OFF	Normal	End of life	Degraded*	Immediately required
OFF	OFF	Discharged	Unable to judge		

\*With pulsating line signal or that containing ripples, the LED may flicker or blink when the voltage limiter is degraded.

## MD7 / MDP Series Selection Guide

APPLICATION	MD7 SERIES	MDP SERIES
4-20 mA loop, pulse signal, 24 V	MD7ST-24	MDP-24-1
4-20 mA loop, life monitor	MD7AST	MDPA-24
2-wire transmitter loop, 1- or 2-channels	MD72W MD72WD	---
3-wire transmitter loop	MD72W	---
Thermocouple transmitter	MD7TC	MDP-TC
RTD transmitter	MD7RB	MDP-RB
Potentiometer & transmitter	MD7PM	MDP-PM
Strain gauge & transmitter	MD7LC	MDP-LC
Self-synch & transmitter	MD7JS	MDP-JS
Pulse sensor & transmitter	MD7PL	MDP-SP
DC power supply, 12/24 Vdc	MD7DP	MDP-D
AC power supply	MD7AP-100 MD7AP-200	MDP-100 MDP-200
RS-422 / RS-485	MD74R	MDP-4R
PROFIBUS-PA	MD7PA	MDP-PA
FOUNDATION Fieldbus	MD7FB	MDP-PA
LONWORKS (FTT-10A)	MD7LWA	MDP-LWA



## Field Transmitter Cable Conduit Mount

MD6N-24 / MD6T-24 / MD6P-24

- Protects 4-20 mA & pulse signals
- Directly mountable to the cable conduit of 2-wire transmitters and other field devices in an outdoor enclosure



Four-wire Signal Conditioners

Two-wire Signal Conditioners

Power Monitoring Components

Indicators & Tower Lights

Remote I/O

Paperless Recorders & PC Recorder

Process & Temperature Controllers

IoT Components

Final Control Components

Lightning Surge Protectors

Sensors

About Us

## SPE Use (Single Pair Ethernet)

MDCAT-SPE / MDCAT-SPE-A

- Conforms with PoDL
- Shield wire can be floating or grounding by a shortcircuit bar.



## CC-Link / CC-Link IE Field Use

MDW5-CC / MDCAT-NC

- Approved and recommended by CLPA



## PoE Plus / 1000BASE-T Ethernet Use


MDCAT / MDCAT-A




- Power-over-Ethernet compatible
- 1000BASE-T / 100BASE-TX / 10BASE-T
- Ideal to protect network devices powered over Ethernet such as webcams
- LAN cable shield wire can be floating or grounding by a shortcircuit bar.
- Conforms to IEC 61643-21, Categories C1, C2



### Star Connection

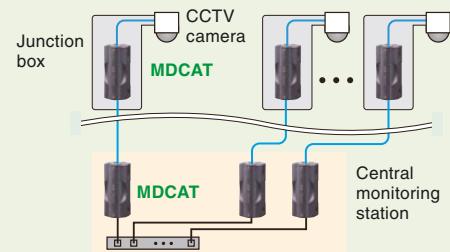

### Cascade Connection

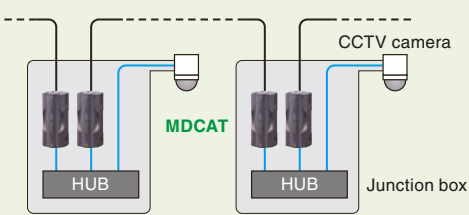

## Life Monitor & Surge Counter

MAA-100 / MAA-200 / MAAC-100 / MAAC-200

- Protects AC power supply lines
- Life monitor function
- Alarm contact output to alert externally the surge protector's health



## One-port SPD for Power Supply

MAKF / MAT2 / MAT3

- Thermal breaker ensures degraded heat element to be automatically separated from the power lines to prevent overheating.
- MAT2 / MAT3 applicable to three-phase power lines in single module




## Strain Gauge Load Cells

One-Stop Solution Combining Load Cells and Interface Equipment

### Compression Type

#### LCC Series

- 2.5 N through 500 kN
- Suitable for a variety of weight testing and measuring applications
- Application example: Forming press pressure measurement
- Customization available with 300 kN and 500 kN types

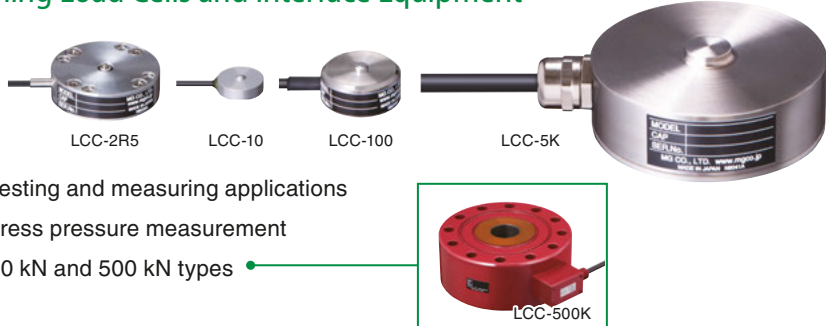

### Tension and Compression Type

#### LCCT Series

- 1 N through 10 kN
- Female and male threaded types
- High accuracy type
- Application example: Materials testing machine



### Beam Type

#### LCB Series

- 10 N through 100 N
- Ultra compact size
- Typically, a set of three to four beams is used for a weighing system.



### Tension Type

#### LCT Series

- 20 kN through 200 kN
- Most suitable for traction and rope tension measurement



## Broad Range of Analog and Digital Interface Equipment

### Signal Conditioners & Limit Alarms

Page 5-11



### Controllers & Indicators

Page 16-18



### Remote I/O

Page 20-21, 23-25



### Lightning Surge Protectors


Page 38-39




## Clamp-on Current Sensors

### CLS Series

- No need of cutting power line cables
- Over-voltage clamp element for safety in open circuit
- Up to 2000 A measurement
- 1 A output types available



## About Us

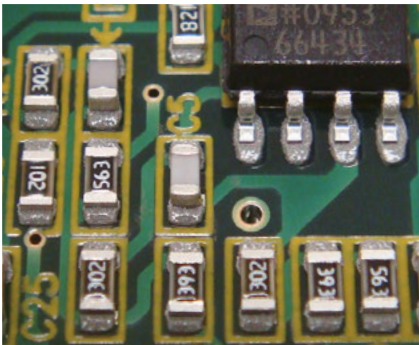

# Customer First Service Policies

All products and services are provided outside Japan through our authorized distributors.

We are trying to enhance the customer satisfaction with the following five service policies.

As to the terms and conditions of a specific service, consult us for details.

### 1. Continued Products Availability

We have basic policy of never to discontinue our products without providing compatible replacements.

We always strive to procure all the electronic parts for our products. When a certain electronic part is no longer available, we will make best effort to provide a product compatibly replaceable with the existing product as long as there is substantial demand for such product.

### 2. Fast and Precise Delivery

The standard manufacturing lead time for most of our products is 5 days.

Quick Service Center is available for 24-48 hours shipment.

Once a delivery time is promised, the customer can of course count on us to deliver them precisely on time.

### 3. Special Specifications Service with no extra charge

Special specification products can be supplied without additional charge for major product series, except for those requiring excessive labor or materials.

We are putting our effort into expansion of the scope of Special Specifications Service to all of our products. Special Specification Service will be available to more product series in the future.

For detailed terms and conditions applicable to each specific product, consult us.

### 4. Special Repair Service

During the service period of 36 months from the date of shipment, we will provide free repair service for a damage or malfunction caused by a user's mistake when we determine at our discretion that cause of the damage or malfunction falls into the "Service Coverage" set out as conditions of this service. Such free repair service will be limited to one repair per cause of the damage or malfunction.

For detailed terms and conditions applicable to each specific product, consult us.

### 5. Factory Setting Service with no extra charge

Configuration setting for programmable products is free of charge upon the customer's request for once when ordering, except for those requiring special engineering (e.g. multi-function PID controllers).

For detailed terms and conditions applicable to each specific product, consult us.

Four-wire Signal Conditioners

Two-wire Signal Conditioners

Power Monitoring Components

Indicators & Tower Lights

Remote I/O

Paperless Recorders & PC Recorder

Process & Temperature Controllers

IoT Components

Final Control Components

Lightning Surge Protectors


Sensors

About Us




# Corporate Profile

Four-wire Signal Conditioners
Two-wire Signal Conditioners
Power Monitoring Components
Indicators & Tower Lights
Remote I/O
Paperless Recorders & PC Recorder
Process & Temperature Controllers
IoT Components
Final Control Components
Lightning Surge Protectors
Sensors

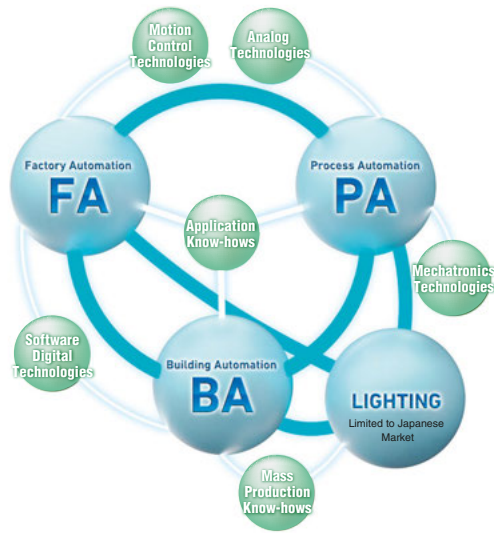

## ORGANIZATION

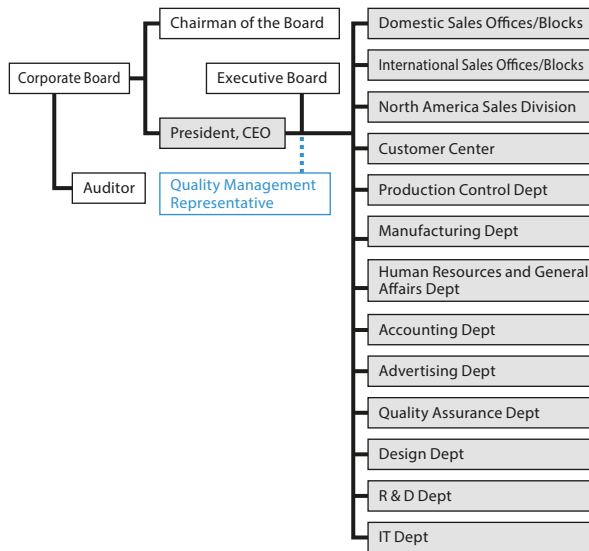

## COMPANY DATA

Company Name	MG Co., Ltd.
Established	April 1972
Headquarters	Osaka, Japan
President and CEO	Saburo Miyamichi
Company mission	Development, manufacturing and sales of signal conditioners & alarm trips, panel/field indicators, energy measurement & management devices, surge protectors, remote I/O, PID controllers, paperless recorders, electric actuators, and sensors
Annual turnover	JPY 10.840 billion (September 2024)
Employees	283
Domestic locations	Osaka (Headquarters, Customer Center), Osaka Research Center & Factory, Kyoto Techno Center, Kyoto Research Center & Factory, Kanto Branch Office, Chubu Branch Office, Kansai Branch Office, Sendai Sales Office, Kyushu Sales Office, Kanazawa Office
Overseas locations	Local companies in Shanghai (China), Guangzhou (China), Seoul (Korea)

## HISTORY

2024	<ul style="list-style-type: none"> <li>Strain gauge load cells</li> <li>Terminal block signal conditioners with OEL display M50E-UNIT</li> <li>USB bus powered PC Recorder</li> </ul> <p>Company name changed to MG Co., Ltd. Corporate headquarters/Customer Center moves to Chuo-ku, Osaka.</p>
2023	<ul style="list-style-type: none"> <li>Terminal block signal conditioners M50X-UNIT</li> <li>Electric actuators with open network</li> </ul>
2022	<ul style="list-style-type: none"> <li>Multi power transducer M5XWTU</li> </ul>
2021	<ul style="list-style-type: none"> <li>Weighing indicator W100 Series</li> </ul>
2019	<ul style="list-style-type: none"> <li>Slice type, scalable remote I/O R80 Series</li> <li>Base-free interconnecting ultra-slim signal conditioners M60S Series</li> </ul>
2018	Guangzhou Office opens in Guangzhou, China.
2017	<ul style="list-style-type: none"> <li>Compact plug-in signal conditioners with OEL display M1E Series</li> </ul>
2016	<ul style="list-style-type: none"> <li>Compact signal conditioners with OEL display M2E Series</li> <li>Web data logger DL30 Series</li> </ul>
2015	<ul style="list-style-type: none"> <li>Ultra-slim digital panel meter 47NL Series</li> </ul>
2014	<ul style="list-style-type: none"> <li>Web-enabled DAQ system Tablet Recorder TR30-G</li> <li>Compact, mixed signal remote I/O R30 Series</li> </ul>
2013	<ul style="list-style-type: none"> <li>Web data logger DL8 Series</li> </ul> <p>Kyoto Research Center &amp; Factory opens in Kizugawa, Kyoto.</p>
2012	<ul style="list-style-type: none"> <li>Tower light Series</li> </ul>
2011	<p>MG Korea Co., Ltd. founded in Seoul, Korea. M-System China Co., Ltd. (currently MG China Co., Ltd.) founded in Shanghai, China.</p>
2010	<ul style="list-style-type: none"> <li>Multi-function PID controller SC Series</li> </ul>
2008	<ul style="list-style-type: none"> <li>Ultra-slim signal conditioners M6 Series</li> </ul> <p>Kyoto Techno Center opens in Kizugawa, Kyoto.</p>
2007	<ul style="list-style-type: none"> <li>Multi power monitor 53U</li> <li>Paperless recorder 73VR Series</li> </ul> <p>Company enters the building automation market.</p>
2006	<ul style="list-style-type: none"> <li>Compact remote I/O R7 Series</li> <li>Ultra-slim surge protectors MD7 Series</li> </ul>
2005	<p>Company certified with ISO 14001 Representative office opens in Shanghai, China.</p>
2004	<ul style="list-style-type: none"> <li>Hot-swappable remote I/O R3 Series</li> </ul> <p>Liaison office opens in Shanghai, China. Company succeeded by new CEO Saburo Miyamichi, and Founder Shigeru Miyamichi appointed as Chairman.</p>
2003	<ul style="list-style-type: none"> <li>'One-Step Cal' programmable transmitters M3 Series</li> </ul>
2002	<ul style="list-style-type: none"> <li>Terminal block signal conditioners M5-UNIT Series</li> <li>HART universal transmitter B6U-B with ATEX/FM approval</li> </ul>
2000	<ul style="list-style-type: none"> <li>PC Recorder</li> </ul>
1997	Company certified with ISO 9001
1995	<ul style="list-style-type: none"> <li>Compact signal conditioners M2 Series</li> </ul>
1993	<ul style="list-style-type: none"> <li>MsysNet Integrated Instrumentation System with super-distributed control concept</li> </ul>
1991	Corporate headquarters/factory moves to Nishinari-ku, Osaka.
1988	<ul style="list-style-type: none"> <li>Programmable signal conditioners JX Series</li> <li>Signal splitters W-UNIT Series</li> </ul>
1986	<ul style="list-style-type: none"> <li>Multiplex transmission system DATA-M Series</li> </ul>
1985	<ul style="list-style-type: none"> <li>Electric actuators</li> </ul> <p>Factory opens in Sumiyoshi-ku, Osaka.</p>
1973	<ul style="list-style-type: none"> <li>Lightning surge protectors</li> <li>Unique plug-in signal conditioners M-UNIT Series</li> </ul>
1972	M-System Co., Ltd. founded in Osaka, Japan by Shigeru Miyamichi

New products



## Locations

### JAPAN

#### Osaka Research Center & Factory



- Major manufacturing location since 1991
- Research, development and design center

Kyushu Sales Office  
(Fukuoka)

#### Kyoto Techno Center Type testing and evaluation facilities



- VCCI (Japan) registered anechoic chamber
- 6 m<sup>2</sup> shielded room capable of conducting multiple tests at once

#### Kyoto Research Center & Factory



- Second manufacturing location inspired by BCP revised after the Great East Japan Earthquake in 2011
- Showcase plant utilizing our BA controllers

**Corporate Headquarters**  
International Sales  
Customer Center  
Kansai Branch Office (Osaka)

Sendai Sales Office

Kanto Branch Office  
(Tokyo)

Chubu Branch Office  
(Nagoya)



**VEMS CO., LTD.**  
Group company for EMS

Four-wire Signal  
Conditioners

Two-wire Signal  
Conditioners

Power Monitoring  
Components

Indicators &  
Tower Lights

Remote I/O

Paperless Recorders  
& PC Recorder

Process &  
Temperature  
Controllers

IoT Components


Final Control  
Components

Lightning Surge  
Protectors

Sensors

About Us

## GLOBAL SALES NETWORK

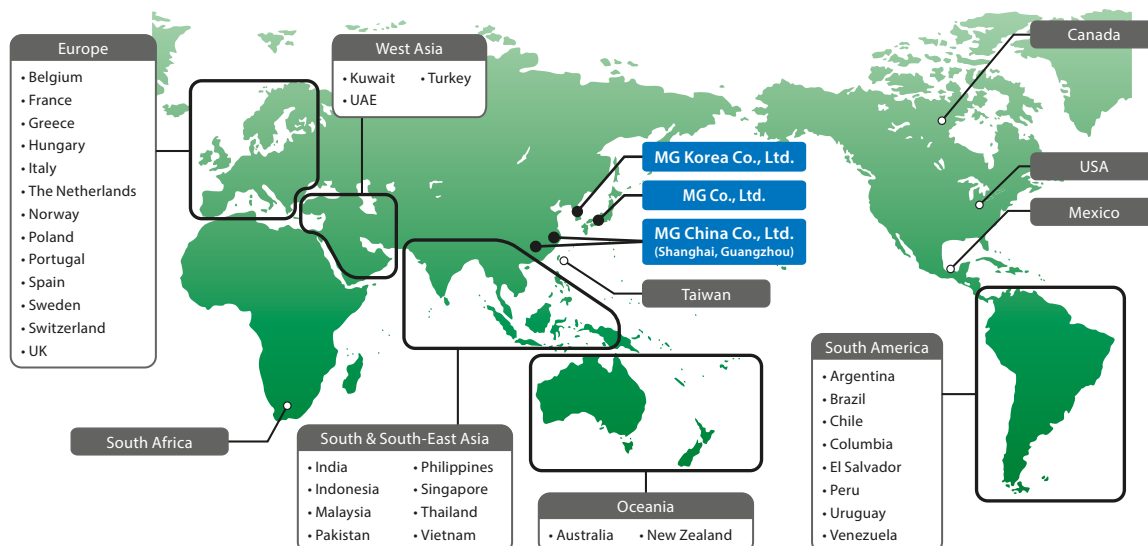

# Find Complete Product Information on Our Global English Website.

## Please Register Your User Information!

Please register your user information so that we can respond promptly and appropriately to your information requests. As a registered user of our website, you can receive our newsletter "MGTrend" and products' firmware/software update information by email. We will continue working on new convenient services.

### Services & Support

You can access all downloadable materials including setup tools (software), drivers and device profiles, catalogs and videos.

### Demo Site

Browse trend and data monitor windows of data logging systems using DL30, DL8 and other products.

### Video Library

Videos on the products and the company, educational materials, virtual exhibition can be viewed on YouTube.



### Specifications & Manuals

Enter either a product model number or a keyword to search for data sheets, instruction manuals and other related documents. Compare specifications to find exactly what you need. You can narrow your search by product categories.

### Product Category Index

Go directly to a product category to find more about products introduced in this catalog and even more selections.

### User Registration

### Request Info



Website



Request Info

MG CO., LTD.  
www.mgco.jp

Your local representative: