



2024-01


EC-Z908 500526

6-0006

Rev. 2

Product Guide

Complete Lineup of Automation Instruments

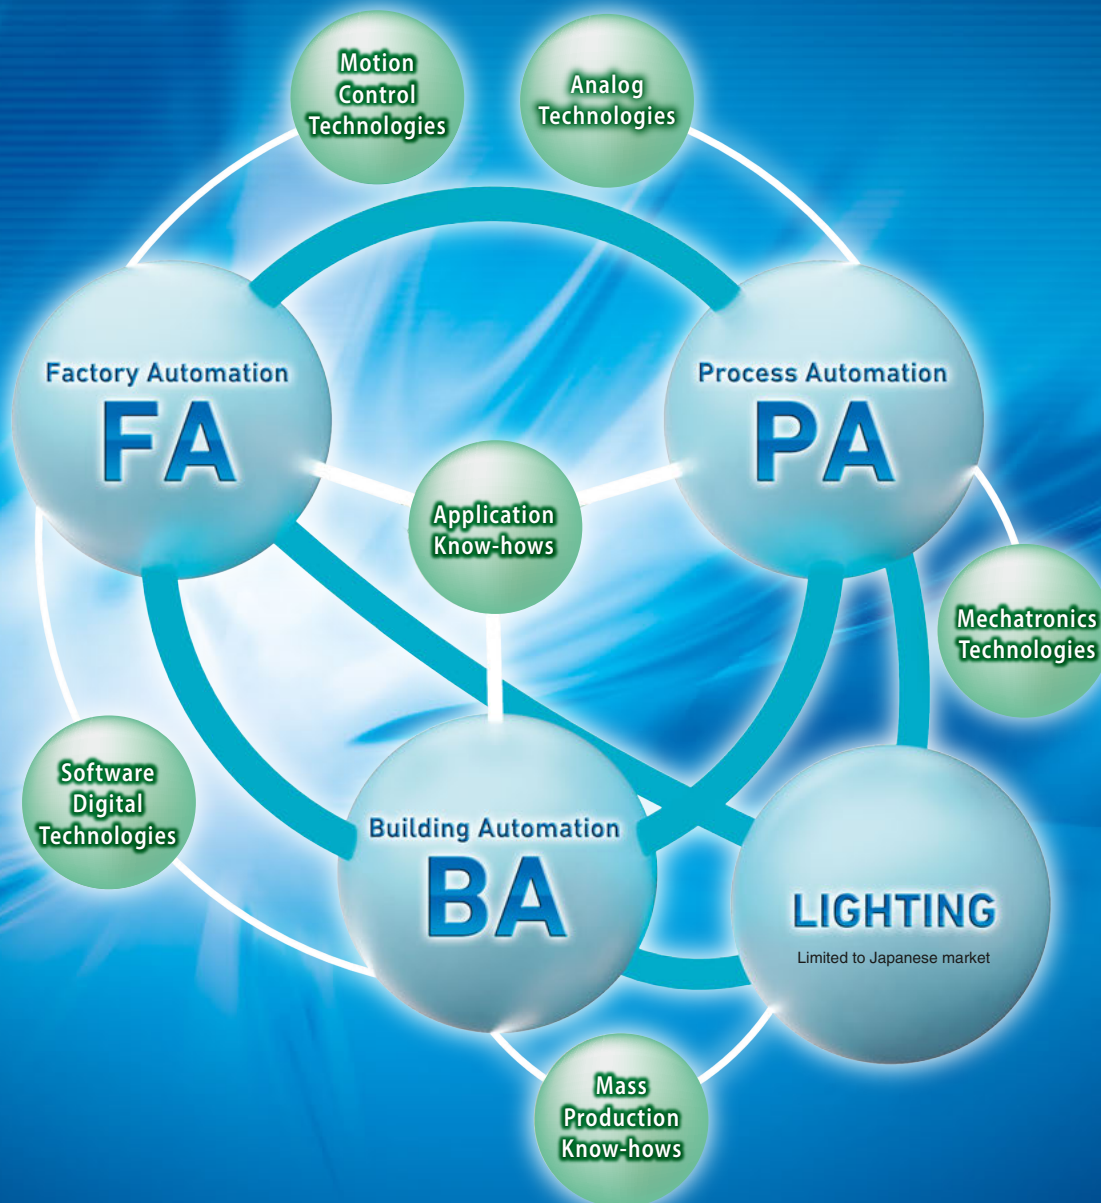

MG CO., LTD.
(formerly M-System Co., Ltd.)
www.mgco.jp

Make Greener automation

Product Guide

We are a leading manufacturer of signal conditioners.

The product series introduced here covers only some of our products. For other products, please visit our website.

Signal Conditioners

Converting measured signals to desired signals.



Two-wire Signal Conditioners

Signal conditioners of on-site installation type with no power source required.



Power Monitoring Components

Calculating, displaying, and outputting power quantities.



Indicators

Graphic panel without dedicated display, expressive digital panel meters and bargraph meters.




Tower Lights

Tower lights provided with communicating function.



Remote I/O

Operating as an interface of measured signals with field networks.



Paperless Recording System

Paperless recorder to which the latest IT technology is applied.



Software (SCADA)

Data collection software



Telemetry System

A remote transmission and monitoring system using diverse types of media, such as dedicated lines, telephone lines, or wireless lines.



Final Control Components

A proposal for mechatronics conversion of the final control elements.



LED Lighting & UVC LED

A universal LED tube that does not require rewiring of existing lamp holders.



LED lighting and UVC LED are products of MGMT Co., Ltd. Limited to Japanese market

Limit Alarms

Monitoring measurement signals and outputting alarm contact signals.



Temperature Controllers

Temperature controller models of on-panel type and in-panel type.



BA & Energy Monitoring Components

From closed systems to open systems.



PID Control Components

New PID controllers incorporating the latest technology.




IoT Components

Products with a variety of functions for IoT.



Lightning Surge Protectors

Lightning surge protectors designed specifically for electronic equipment.



Five Service Policies

Established under the idea of Customer-First principle

All our products and services are provided outside Japan through our authorized distributors. We are trying to enhance the customer satisfaction with the following five service policies. As to the terms and conditions of a specific service, consult us for details.

1. Continued Products Availability

- We have basic policy of not to discontinue our products without providing compatible replacements.
- We always strive to procure all the electronic parts for our products. When a certain electronic part is no longer available, we will make best effort to provide a product compatibly replaceable with the existing product as long as there is substantial demand for such product.

2. Fast and Precise Delivery

- The standard manufacturing lead time for most of our products is 5 days.
- Quick Service Center is available for 24-48 hours shipment.
- Once a delivery time is promised, the customer can of course count on us to deliver them precisely on time.

3. Special Specifications Service with no extra charge

- Special specification products can be supplied without additional charge for major product series, except for those requiring excessive labor or materials.
- We are putting our effort into expansion of the scope of Special Specifications Service to all of our products. Special Specification Service will be available to more product series in the future.

For detailed terms and conditions applicable to each specific product, consult us.

4. Special Repair Service

- During the service period of 36 months from the date of shipment, we will provide free repair service for a damage or malfunction caused by a user's mistake when we determine at our discretion that cause of the damage or malfunction falls into the "Service Coverage" set out as conditions of this service. Such free repair service will be limited to one repair per cause of the damage or malfunction.

For detailed terms and conditions applicable to this service, consult us.

5. Factory Setting Service with no extra charge

- Configuration setting for programmable products is free of charge upon the customer's request for once when ordering, except for those requiring special engineering (e.g. multi-function PID controllers).

For detailed terms and conditions applicable to each specific product, consult us.

BA & Energy Monitoring Components

DDC for Open Building Automation Systems

DDC for HVAC Control Supporting Modbus, LONWORKS, and BACnet

BA3 Series

W140 x H130 x D120 mm (5 modules)



Limited to Japanese market

VAV/FCU Controller Supporting Modbus and LONWORKS

BA9 Series

(Left to right)
W125 x H140 x D55 mm (BA9-VAV)
W70 x H120 x D28.5 mm (BA-RC2)



Limited to Japanese market

Web-enabled Power Demand Monitor

EDMC

W50 x H80 x D123 mm (EDMC)



Limited to Japanese market

Remote I/O

BA8NS Series

W24 x H115 x D72 mm (BA8NS-CONV)



Limited to Japanese market

Remote I/O for HVAC Control Systems

Multi-channel, Scalable Remote I/O

R3 Series



W224 x H130 x D120 mm (8 modules)

Compact, Expandable Remote I/O

R7 Series



W115 x H53 x D54 mm (R7M-SV4)



Telemetry System

WIRED

Multiplex Transmission System

D3 Series



W224 x H130 x D120 mm (8 modules)

Telemetry System

D5 Series

W231 x H96 x D106.5 mm (8/9 modules)



Limited to Japanese market

WIRELESS

900-920 MHz ISM Band Multi-hop Wireless System

W45 x H97 x D41 mm (excl. antenna) (WL5MW1)

For limited markets



W60 x H110 x D130 mm (excl. antenna) (WL40W1-US1)



W226 x H381.5 x D206 mm (IT60SW2)




W90 x H352 x D60 mm (IT60SW5)

IoT Components

Web Data Logger Web Enabled RTU DL8 Series

W79 x H115 x D73 mm (2 x 12 mm-wide I/O modules)



Smartphone (*)



Web Data Logger

DL30 Series



W100 x H110 x D110 mm (2 slots)

Web-enabled DAQ System Tablet Recorder



TR30-G W100 x H110 x D110 mm (2 slots)



TR75 W288 x H288 x D180 mm (TR75)

Limited to Japanese market


Remote Graphic Panel

RGP Series

Limited to Japanese market (RGP6)

W115 x H55 x D100 mm (RGP6)

W50 x H110 x D128 mm (RGP30)



RGP6



RGP30

WIRELESS

900-920 MHz ISM Band Multi-hop Wireless System

For limited markets



W45 x H97 x D41 mm (excl. antenna) (WL5MW1)

W60 x H110 x D130 mm (excl. antenna) (WL40W1-US1)

Lightning Surge Protectors

M-RESTER Series

Ultra-slim Surge Protector

MD7 Series

MD7AST, MD7ST etc.



W7 x H95 x D100 mm (MD7AST)




Sensors / Transmitters (provided by the user)

PC / DCS / PLC (provided by the user)

Paperless Recording System

Web-enabled
DAQ System
Tablet Recorder

TR30-G
W100 x H110
x D110 mm
(2 slots)



TR75
W288 x H288
x D180 mm
(TR75)




Limited to Japanese market

Indicators

Remote Graphic Panel

RGP Series
Limited to Japanese
market (RGP6)



RGP6
W115 x H55
x D100 mm (RGP6)



RGP30
W50 x H110
x D128 mm (RGP30)

Digital Panel Meters



W96 x H48
x D96 mm (40DV)
Large display type

40 Series



W48 x H24
x D82 mm (43EV)
1/32 DIN size meter
with alarm output

43E Series



W96 x H48
x D98.5 mm (47LV)
LED/LCD display

47 Series

Bargraph Indicators



48N Series
W36 x H144
x D103 mm
(48NAV)

Two-wire Signal Conditioners

Head-mounted Signal Conditioners

27/26-UNIT Series

W44 x H44
x D20.7 mm
(27HU)



Field-mounted Signal Conditioners

27HU-B/
B6U-B



W110 x H118
x D92 mm
(B6U-B)

P/I Transducer

PVT etc.



W67 x H70
x D30 mm
(PVT)

Terminal Block Type Signal Conditioners



B5-UNIT Series

W25 x H94
x D41 mm
(B5VS)

Signal Conditioners

Plug-in Socket Mounted Signal Conditioners

Compact signal conditioners

M2/M2E Series (Mini-M)



W23 x H76
x D124 mm
(M2VS)



W29.5 x H83
x D132 mm
(M2EV)

Plug-in Socket Mounted Signal Conditioners

M-UNIT Series

W50 x H80
x D127 mm (SV)



Compact signal conditioners with programming display

M1E Series

W36 x H99
x D125 mm (M1EXV-2)



Terminal Block Type Signal Conditioners

M5-UNIT Series

W25 x H97
x D41 mm
(M5VS)



Isolated two outputs
W5-UNIT Series

W45 x H97
x D41 mm (W5VS)



Can be added in a tight space of existing panel



Plug-in Socket Mounted Signal Conditioners

K-UNIT Series

W50 x H80
x D123 mm (KVS)



Ultra-slim Signal Conditioners

M6 Series

(Left to right)
W5.9 x H94 x D102 mm (M6SXV)
W7.5 x H102 x D102 mm (M6NYV)
W5.9 x H94 x D102 mm (M6DYV)



Plug-in Base Mounted Surge Protector

MDPA-24,
MDP-RB etc.



W23.5 x H100
x D81 mm
(MDPA-24)



W31.5 x H100
x D80 mm
(MDP-RB)

Field Transmitter Cable Conduit Mount Surge Protector



(Left to right) DIA32 x L72 mm (excl. leadwire) (MD6N)
DIA32 x L62 mm (excl. leadwire) (MD6P)
DIA40 x L79 mm (excl. leadwire) (MD6T)

Surge Protector with Life Monitor

MAA,
MDM2A etc.



W50 x H80
x D123 mm
(MAA)

W29.5 x H76
x D124 mm
(MDM2A)



Software (SCADA)



TFT Color LCD Display

71VR1

96 mm sq. CE



W96 x H96 x D115.5 mm (71VR1)

Touch Panel Operation

73VR Series

144 mm sq. CE



W144 x H144 x D172 mm (73VR21)

Weighing Indicator



W162 x H72 x D119.6 mm (W100)
W100 Series

CE

Field Indicators

Loop powered indicator
6DV/6DV-B

W70 x H70 x D21 mm (6DV)



W110 x H118 x D92 mm (6DV-B)


CE IS/Ex

Tower Lights

Wireless products are for limited markets

- ISM Band Wireless Tower Light
- WLAN Tower Light
- Open Network Capable Tower Light
- Discrete Input Tower Light

CC-Link Modbus/TCP

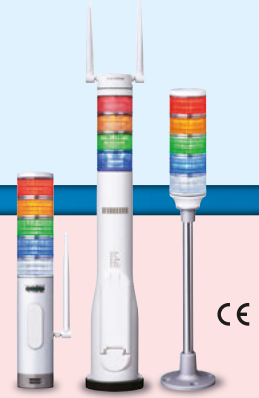

(Left to right)
W90 x H352 x D60 mm (IT60SW5)
W98 x H667.4 x D98 mm (IT60W1)
W94 x H490.5 x D94 mm (IT60SA3)

CE

Rack-mounted Signal Conditioners

Dual output super-mini signal conditioners
M8 Series (Pico-M)



W17.5 x H48 x D75 mm (M8VS)

CE

Super-mini signal conditioners
M80 Series



W14 x H39.2 x D50.5 mm (M80YV)

CE

Isolation Amplifiers

20 Series



(Top left to bottom right)
W49 x H14.5 x D18 mm (20VS2-1)
W54 x H15 x D25 mm (20VS7-205D)
W47.5 x H16 x D10.7 mm (20VS5-204)

I/P and P/I Transducers

HVP etc.

W25 x H120 x D150 mm (HVP)

CE



Front-configurable Signal Conditioners

MX-UNIT Series

W50 x H80 x D123 mm (MXV)

CE



Base-free interconnecting signal conditioners

M60 Series

W8 x H108 x D102 mm (M60SVS)

CE



Power Monitoring Components

Modbus

(Left To right)

W45 x H97 x D41 mm (excl. antenna) (WL5MW1)
W25 x H97 x D41 mm (M5XWTU, M5XWT)
W28 x H105 x D41 mm (M50XWTU)



Multi power transducers
M5XWTU
M5XWT
M50XWTU

CE

Wireless gateway
WL5MW1
Limited to Japanese market

Power Transducers

M4 screw connection power transducers
LT-UNIT Series



W72 x H111 x D143 mm (LTWT)

CE

Multi Power Monitor and Transducer



W96 x H96 x D115 mm (53U)

96 mm sq.
110 mm sq.

CE

Multi power monitor with 4-line display
53/54-UNIT Series

CC-Link Modbus LONWORKS BACnet

Limit Alarms

Programmable Alarms

Alarms with LED display
AS4 Series



W50 x H80 x D132 mm (AS4V)

CE cULus

OEL display



Compact alarms with OEL display
M1E Series

W36 x H99 x D125 mm (M1EAXV-2)

CE

OEL display



Compact alarms with OEL display
M2E Series (Mini-M)

W29.5 x H83 x D132 mm (M2EAXV)

CE

One-Port Surge Protector for Power Supply

MAKN, MAT3 etc.



W18 x H97 x D65 mm (MAKN)



W50 x H98 x D60 mm (MAT3)

CE

Surge Protector for Communication Networks

MDW5-CC etc.



W45 x H97 x D41 mm (MDW5-CC)

CE

RS-422 / RS-485 Ethernet

CC-Link CC-Link IE Field

DeviceNet LONWORKS

FOUNDATION Fieldbus

PROFIBUS-PA

Ethernet lightning surge protector ideal for surveillance cameras



MDCAT etc.

W38 x H93.5 x D35 mm (MDCAT)

CE



LED Lighting & UVC LED

LED lighting and UVC LED are products of MGMT Co., Ltd.



Limited to Japanese market

Remote I/O

W140 x H55 x D57 mm
(R7G4HML3-6-SV4)




Expandable, Compact Remote I/O
R7 Series

Slice Type, Scalable Remote I/O
R8 Series



W152.5 x H115 x D59 mm
(8 x 12 mm-wide I/O modules)

Slice Type, Scalable Remote I/O
R80 Series



W104.5 x H115 x D73 mm
(2 x 12 mm-wide I/O modules,
1 x 24 mm-wide I/O modules)

Multi-channel, Scalable Remote I/O
R3 Series



W224 x H130 x D120 mm
(8 modules)

Compact, Scalable Remote I/O
R30 Series



W100 x H110 x D110 mm
(2 slots)

Ultra-slim, Scalable Remote I/O
R6 Series



W78 x H99 x D116 mm
(euro terminal type,
8 slots)

Plug-in Remote I/O
R10 Series



W36 x H99 x D125 mm
(R10M-CT4E)


OPEN NETWORKS



WIRELESS

900-920 MHz ISM Band
Multi-hop Wireless System

For limited markets

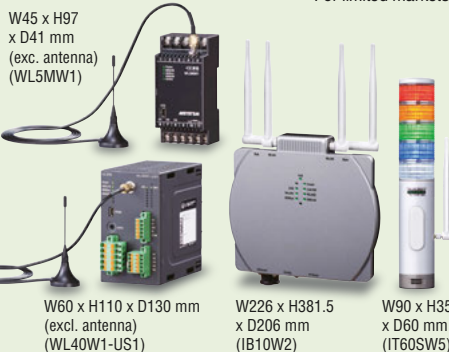

W45 x H97
x D41 mm
(exc. antenna)
(WL5MW1)

W60 x H110 x D130 mm
(excl. antenna)
(WL40W1-US1)

W226 x H381.5
x D206 mm
(IB10W2)

W90 x H352
x D60 mm
(IT60SW5)

Surge Protector
for Photovoltaic
System



MATPH etc.



W50 x H98
x D60 mm
(MATPH)

PID Control Components

Multi-function PID Controllers

SC Series

W72 x H144
x D274 mm
(SC100)



Limited to
Japanese market

ABL



W96 x H96
x D167 mm (ABL)

Temperature Controllers



W112 x H130
x D120 mm
(4 modules)

In-panel type, 2 loops
R3-TC2



W96 x H96
x D108 mm
(TC10EM)

On-panel type, 2 loops
TC10EM

96 mm sq.



Final Control Components

Electric Actuators Driven by
Stepping Motor

MSP10/MRP10

STANDARD FEATURES

- Auto-setup (MSP10)
- Modbus
- Terminal box
- Position indicator (MRP10)

Modbus



MSP10
W110 x H258
x D210 mm (MSP10)



MRP10
W111 x H227.5
x D211.5 mm (MRP10)



UK
CA

Compact
Electric Actuators

MSP/MRP Series

CC-Link
Modbus
DeviceNet



MSP4
W98 x H MAX215
x D107 mm (MSP4)



MRP4C2
W98 x H144
x D174 mm (MRP4C2)



UK
CA

Electric Actuators

PSN/PRP Series

PRP-2

W344 x H382
x D282 mm (PRP-2)



PSN1
W140
x H MAX327.5
x D182 mm
(PSN1)



PRP

W167 x H156
x D312 mm (PRP)



Find Complete Product Information on Our Global English Website.

www.mgco.jp

Services & Support

You can access all downloadable materials including setup tools (software), drivers and device profiles, catalogs and videos.

Demo Site

Access demo sites to view standard and user-configured monitoring windows of web-enabled data loggers and other products.

Video Library

Videos on the products and the company, educational materials, virtual exhibition can be viewed on YouTube.

Specifications & Manuals

Enter either a product model number or a keyword to search for data sheets, instruction manuals and other related documents.
Compare specifications to find exactly what you need.
You can narrow your search by product categories.

Product Category Index

Go directly to a product category to find more about products introduced in this catalog and even more selections.

Application Examples

Find products suitable for your application fields.



Regional Language Websites

Product information including data sheets, instruction manuals and videos is available in multiple languages.

日本語

ENGLISH

中文(简体)

한국어



Japanese



Chinese (Simplified Chinese)



Korean



Website



Request Info

Your local representative:

MG CO., LTD.
(formerly M-System Co., Ltd.)
www.mgco.jp