

Find Complete Product Information on Our Global English Website.

www.mgco.jp

Services & Support

You can access all downloadable materials including setup tools (software), drivers and device profiles, catalogs and videos.

Demo Site

Access demo sites to view standard and user-configured monitoring windows of web-enabled data loggers and other products.

Video Library

Videos on the products and the company, educational materials, virtual exhibition can be viewed on YouTube.

Specifications & Manuals

Enter either a product model number or a keyword to search for data sheets, instruction manuals and other related documents. Compare specifications to find exactly what you need. You can narrow your search by product categories.

Product Category Index

Go directly to a product category to find more about products introduced in this catalog and even more selections.

Application Examples

Find products suitable for your application fields.



Regional Language Websites

Product information including data sheets, instruction manuals and videos is available in multiple languages.

- 日本語
- ENGLISH
- 中文(简体)
- 한국어



Japanese



Chinese (Simplified Chinese)



Korean



Website Request Info

MG CO., LTD.
(formerly M-System Co., Ltd.)
www.mgco.jp

Your local representative:

Specifications are subject to change without notice. When ordering, use the latest data sheets available at our web site: www.mgco.jp



Product Guide


2024-01

EC-Z908 500526

6-0006
Rev. 2

Product Guide

Complete Lineup of Automation Instruments

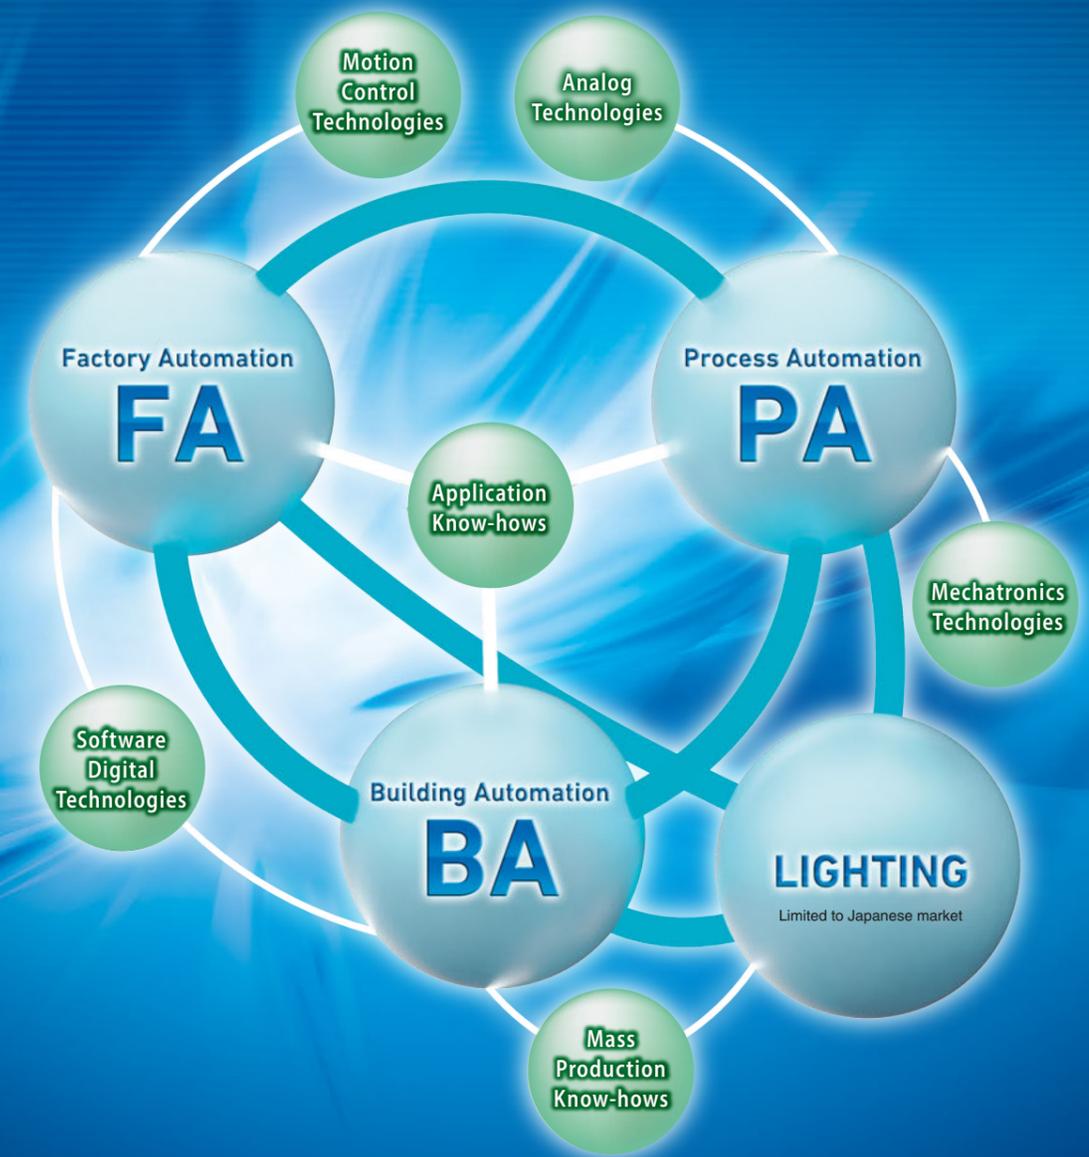

MG CO., LTD.
(formerly M-System Co., Ltd.)
www.mgco.jp

Make Greener automation

Product Guide

We are a leading manufacturer of signal conditioners.

The product series introduced here covers only some of our products. For other products, please visit our website.

Signal Conditioners

Converting measured signals to desired signals.



Two-wire Signal Conditioners

Signal conditioners of on-site installation type with no power source required.



Power Monitoring Components

Calculating, displaying, and outputting power quantities.



Indicators

Graphic panel without dedicated display, expressive digital panel meters and bargraph meters.



Tower Lights

Tower lights provided with communicating function.



Limit Alarms

Monitoring measurement signals and outputting alarm contact signals.



Remote I/O

Operating as an interface of measured signals with field networks.



Temperature Controllers

Temperature controller models of on-panel type and in-panel type.



Paperless Recording System

Paperless recorder to which the latest IT technology is applied.



BA & Energy Monitoring Components

From closed systems to open systems.



Software (SCADA)

Data collection software



PID Control Components

New PID controllers incorporating the latest technology.



Telemetry System

A remote transmission and monitoring system using diverse types of media, such as dedicated lines, telephone lines, or wireless lines.



IoT Components

Products with a variety of functions for IoT.



Final Control Components

A proposal for mechatronics conversion of the final control elements.



Lightning Surge Protectors

Lightning surge protectors designed specifically for electronic equipment.



LED Lighting & UVC LED

A universal LED tube that does not require rewiring of existing lamp holders.



LED lighting and UVC LED are products of MGMT Co., Ltd. Limited to Japanese market

Five Service Policies

Established under the idea of Customer-First principle

All our products and services are provided outside Japan through our authorized distributors. We are trying to enhance the customer satisfaction with the following five service policies. As to the terms and conditions of a specific service, consult us for details.

1. Continued Products Availability

- We have basic policy of not to discontinue our products without providing compatible replacements.
- We always strive to procure all the electronic parts for our products. When a certain electronic part is no longer available, we will make best effort to provide a product compatibly replaceable with the existing product as long as there is substantial demand for such product.

2. Fast and Precise Delivery

- The standard manufacturing lead time for most of our products is 5 days.
- Quick Service Center is available for 24-48 hours shipment.
- Once a delivery time is promised, the customer can of course count on us to deliver them precisely on time.

3. Special Specifications Service with no extra charge

- Special specification products can be supplied without additional charge for major product series, except for those requiring excessive labor or materials.
- We are putting our effort into expansion of the scope of Special Specifications Service to all of our products. Special Specification Service will be available to more product series in the future.

For detailed terms and conditions applicable to each specific product, consult us.

4. Special Repair Service

- During the service period of 36 months from the date of shipment, we will provide free repair service for a damage or malfunction caused by a user's mistake when we determine at our discretion that cause of the damage or malfunction falls into the "Service Coverage" set out as conditions of this service. Such free repair service will be limited to one repair per cause of the damage or malfunction.

For detailed terms and conditions applicable to this service, consult us.

5. Factory Setting Service with no extra charge

- Configuration setting for programmable products is free of charge upon the customer's request for once when ordering, except for those requiring special engineering (e.g. multi-function PID controllers).

For detailed terms and conditions applicable to each specific product, consult us.

BA & Energy Monitoring Components

DDC for Open Building Automation Systems

DDC for HVAC Control Supporting Modbus, LONWORKS, and BACnet

BA3 Series

W140 x H130 x D120 mm (5 modules)



Limited to Japanese market

VAV/FCU Controller Supporting Modbus and LONWORKS

BA9 Series

(Left to right)
W125 x H140 x D55 mm (BA9-VAV)
W70 x H120 x D28.5 mm (BA-RC2)



Limited to Japanese market

Web-enabled Power Demand Monitor

EDMC

W50 x H80 x D123 mm (EDMC)



Limited to Japanese market

Remote I/O

BA8NS Series

W24 x H115 x D72 mm (BA8NS-CONV)



Limited to Japanese market

Remote I/O for HVAC Control Systems

Multi-channel, Scalable Remote I/O R3 Series



W224 x H130 x D120 mm (8 modules)

Compact, Expandable Remote I/O R7 Series



W115 x H53 x D54 mm (R7M-SV4)

CE cULus

Telemetry System

WIRED

Multiplex Transmission System

D3 Series



W224 x H130 x D120 mm (8 modules)

Telemetry System

D5 Series



W231 x H96 x D106.5 mm (8/9 modules)

Limited to Japanese market

WIRELESS

900-920 MHz ISM Band Multi-hop Wireless System

W45 x H97 x D41 mm (excl. antenna) (WL5MW1)



For limited markets

W60 x H110 x D130 mm (excl. antenna) (WL40W1-US1)



W226 x H381.5 x D206 mm (IB10W2)

W90 x H352 x D60 mm (IT60SW5)

IoT Components

Web Data Logger

Web Enabled RTU DL8 Series

W79 x H115 x D73 mm (2 x 12 mm-wide I/O modules)



Smartphone (**)

Web Data Logger

DL30 Series



W100 x H110 x D110 mm (2 slots)

Web-enabled DAQ System Tablet Recorder



TR30-G W100 x H110 x D110 mm (2 slots)



TR75 W288 x H288 x D180 mm (TR75) Limited to Japanese market

Remote Graphic Panel

RGP Series

Limited to Japanese market (RGP6)



W115 x H55 x D100 mm (RGP6)

W50 x H110 x D128 mm (RGP30)

WIRELESS

900-920 MHz ISM Band Multi-hop Wireless System

For limited markets



W45 x H97 x D41 mm (excl. antenna) (WL5MW1)

W60 x H110 x D130 mm (excl. antenna) (WL40W1-US1)

Paperless Recording System

Web-enabled DAQ System Tablet Recorder

TR30-G W100 x H110 x D110 mm (2 slots)



TR75 W288 x H288 x D180 mm (TR75)



Limited to Japanese market

Indicators

Remote Graphic Panel

RGP Series

Limited to Japanese market (RGP6)



RGP6 W115 x H55 x D100 mm (RGP6)

RGP30 W50 x H110 x D128 mm (RGP30)

Digital Panel Meters

40 Series

W96 x H48 x D96 mm (40DV)

Large display type

40 Series

43E Series

W48 x H24 x D82 mm (43EV)

1/32 DIN size meter with alarm output

43E Series

47 Series

W96 x H48 x D98.5 mm (47LV)

LED/LCD display

47 Series

Bargraph Indicators

48N Series

W36 x H144 x D103 mm (48NAV)



CE UK CA

Two-wire Signal Conditioners

Head-mounted Signal Conditioners

27/26-UNIT Series

W44 x H44 x D20.7 mm (27HU)




CE IS/Ex

Field-mounted Signal Conditioners

27HU-B/ B6U-B

W110 x H118 x D92 mm (B6U-B)

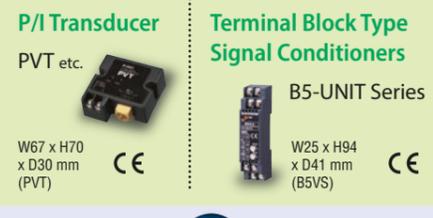

IS/Ex

CE

P/I Transducer

PVT etc.

W67 x H70 x D30 mm (PVT)




CE

Terminal Block Type Signal Conditioners

B5-UNIT Series

W25 x H94 x D41 mm (B5VS)



CE

Signal Conditioners

Plug-in Socket Mounted Signal Conditioners

M2/M2E Series (Mini-M)

Compact signal conditioners



W23 x H76 x D124 mm (M2VS)

CE cULus UK CA

OEL display


W29.5 x H83 x D132 mm (M2EXV)

CE

Plug-in Socket Mounted Signal Conditioners

M-UNIT Series

W50 x H80 x D127 mm (SV)



CE cULus

Plug-in Socket Mounted Signal Conditioners

M1E Series

W36 x H99 x D125 mm (M1EXV-2)



CE

OEL display

Terminal Block Type Signal Conditioners

M5-UNIT Series


W25 x H97 x D41 mm (M5VS)



CE UK CA

Isolated two outputs W5-UNIT Series

W45 x H97 x D41 mm (W5VS)




CE

Plug-in Socket Mounted Signal Conditioners

K-UNIT Series

W50 x H80 x D123 mm (KVS)



CE

Ultra-slim Signal Conditioners

M6 Series

(Left to right)
W5.9 x H94 x D102 mm (M6SXV)
W7.5 x H102 x D102 mm (M6NYV)
W5.9 x H94 x D102 mm (M6DYV)



CE cULus

Lightning Surge Protectors

M-RESTER Series

Ultra-slim Surge Protector

MD7 Series

MD7AST, MD7ST etc.



W7 x H95 x D100mm (MD7AST)

CE IS

Plug-in Base Mounted Surge Protector

MDPA-24, MDP-RB etc.



W23.5 x H100 x D81 mm (MDPA-24)

W31.5 x H100 x D80 mm (MDP-RB)

CE

Field Transmitter Cable Conduit Mount Surge Protector

MAA, MDM2A etc.

W50 x H80 x D123mm (MAA) W29.5 x H76 x D124mm (MDM2A)



(Left to right)
DIA32 x L72 mm (excl. leadwire) (MD6N)
DIA32 x L62 mm (excl. leadwire) (MD6P)
DIA40 x L79 mm (excl. leadwire) (MD6T)

CE Ex

Surge Protector with Life Monitor

MAA, MDM2A etc.

W50 x H80 x D123mm (MAA) W29.5 x H76 x D124mm (MDM2A)



W50 x H80 x D123mm (MAA)

W29.5 x H76 x D124mm (MDM2A)

Sensors / Transmitters (provided by the user)

Software (SCADA)



LED Lighting & UVC LED

LED lighting and UVC LED are products of MGMT Co., Ltd.



Limited to Japanese market

PID Control Components

Multi-function PID Controllers

SC Series

W72 x H144 x D274 mm (SC100)



ABL

Limited to Japanese market



W96 x H96 x D167 mm (ABL)

Temperature Controllers



In-panel type, 2 loops R3-TC2



On-panel type, 2 loops TC10EM

Final Control Components

Electric Actuators Driven by Stepping Motor

MSP10/MRP10

STANDARD FEATURES

- Auto-setup (MSP10)
- Modbus
- Terminal box
- Position indicator (MRP10)

Modbus

CE UK CA



MSP10
W110 x H258 x D210 mm (MSP10)



MRP10
W111 x H227.5 x D211.5 mm (MRP10)

Compact Electric Actuators

MSP/MRP Series

CC-Link Modbus DeviceNet

CE UK CA



MSP4
W98 x H MAX215 x D107 mm (MSP4)



MRP4C2
W98 x H144 x D174 mm (MRP4C2)

Electric Actuators

PSN/PRP Series

PRP-2
W344 x H382 x D282 mm (PRP-2)



PSN1
W140 x H MAX327.5 x D182 mm (PSN1)



PRP
W167 x H156 x D312 mm (PRP)

Remote I/O

Expandable, Compact Remote I/O R7 Series

W140 x H55 x D57 mm (R7G4HML3-6-SV4)



Slice Type, Scalable Remote I/O R8 Series



W152.5 x H115 x D59 mm (8 x 12 mm-wide I/O modules)

Slice Type, Scalable Remote I/O R80 Series



W104.5 x H115 x D73 mm (2 x 12 mm-wide I/O modules, 1 x 24 mm-wide I/O modules)

Multi-channel, Scalable Remote I/O R3 Series



W224 x H130 x D120 mm (8 modules)

Compact, Scalable Remote I/O R30 Series



W100 x H110 x D110 mm (2 slots)

Ultra-slim, Scalable Remote I/O R6 Series



W78 x H99 x D116 mm (euro terminal type, 8 slots)

Plug-in Remote I/O R10 Series




W36 x H99 x D125 mm (R10M-CT4E)

OPEN NETWORKS



WIRELESS 900-920 MHz ISM Band Multi-hop Wireless System

For limited markets

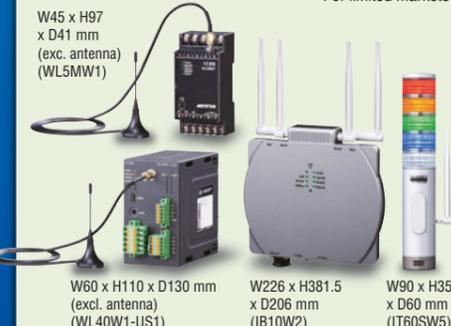

W45 x H97 x D41 mm (excl. antenna) (WL5MW1)

W60 x H110 x D130 mm (excl. antenna) (WL40W1-US1)

W226 x H381.5 x D206 mm (IB10W2)

W90 x H352 x D60 mm (IT60SW5)

Tower Lights


ISM Band Wireless Tower Light

WLAN Tower Light

Open Network Capable Tower Light

CC-Link Modbus/TCP

Discrete Input Tower Light

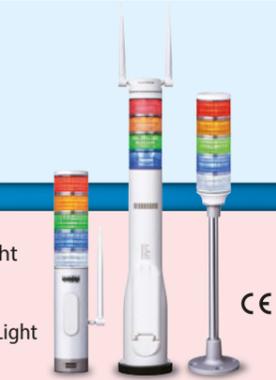

(Left to right) W90 x H352 x D60 mm (IT60SW5) W98 x H667.4 x D98 mm (IT60W1) W94 x H490.5 x D94 mm (IT60SA3)

Power Monitoring Components

Modbus

(Left to right)

W45 x H97 x D41 mm (excl. antenna) (WL5MW1) W25 x H97 x D41 mm (M5XWTU, M5XWT) W28 x H105 x D41 mm (M50XWTU)

Power Transducers

M4 screw connection power transducers LT-UNIT Series



W72 x H111 x D143 mm (LTWT)

Multi Power Monitor and Transducer

Multi power monitor with 4-line display 53/54-UNIT Series



W96 x H96 x D115 mm (53U)

Limit Alarms

Programmable Alarms

Alarms with LED display AS4 Series



W50 x H80 x D132 mm (AS4V)

OEL display

Compact alarms with OEL display M1E Series

W36 x H99 x D125 mm (M1EAXV-2)

OEL display

Compact alarms with OEL display M2E Series (Mini-M)

W29.5 x H83 x D132 mm (M2EAXV)

TFT Color LCD Display

71VR1 96 mm sq. CE



W96 x H96 x D115.5 mm (71VR1)

Touch Panel Operation

73VR Series 144 mm sq. CE



W144 x H144 x D172 mm (73VR21)

Weighing Indicator



W162 x H72 x D119.6 mm (W100) W100 Series

Field Indicators

Loop powered indicator 6DV/6DV-B



W110 x H118 x D92 mm (6DV-B)

Rack-mounted Signal Conditioners

Dual output super-mini signal conditioners M8 Series (Pico-M)

Super-mini signal conditioners M80 Series



W17.5 x H48 x D75 mm (M8VS)



W14 x H39.2 x D50.5 mm (M80YV)

Isolation Amplifiers

20 Series



(Top left to bottom right) W49 x H14.5 x D18 mm (20VS2-1) W54 x H15 x D25 mm (20VS7-20SD) W47.5 x H16 x D10.7 mm (20VS5-204)

I/P and P/I Transducers

HVP etc.

W25 x H120 x D150 mm (HVP)



Front-configurable Signal Conditioners

MX-UNIT Series

W50 x H80 x D123 mm (MXV)



Base-free interconnecting signal conditioners M60 Series

W8 x H108 x D102 mm (M60SVS)



One-Port Surge Protector for Power Supply

MAKN, MAT3 etc.



W18 x H97 x D65 mm (MAKN)



W50 x H98 x D60 mm (MAT3)

Surge Protector for Communication Networks

MDW5-CC etc.



W45 x H97 x D41 mm (MDW5-CC)

RS-422/RS-485 Ethernet

CC-Link CC-Link IE Field

DeviceNet LONWORKS

FOUNDATION Fieldbus

PROFIBUS-PA

Ethernet lightning surge protector ideal for surveillance cameras



MDCAT etc.

W38 x H93.5 x D35 mm (MDCAT)

Surge Protector for Photovoltaic System

MATPH etc.



W50 x H98 x D60 mm (MATPH)