

STANDARD RACK
(2 chs. use)

model **10BXU**

Thank you for choosing us. Before use, check specifications on the unit label.

If you have any problems or questions with the product, please contact our sales office or representatives.


General Description

The 10-RACK Model 10BXU can receive up to 2 modules of 10-RACK signal conditioners.

- 24V DC power supply to each module via card-edge connector


Installation [Scale: mm(inch)]

- Operating temperature: -5 to +55°C (23 to 131°F)
50°C (122°F) max. for AC power supply type
 - Operating humidity: 30 to 90% RH (non-condensing)
- Keep away from water, corrosive gas, dust and vibration.
Mounting dimensions are as in the below.

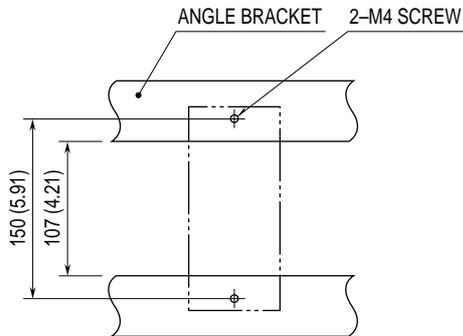

Terminal Connections

Make wiring to terminals as shown in the figure below.

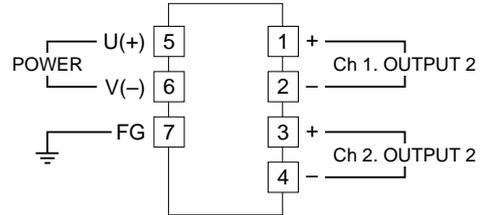

Checking

- Terminal Wiring
- Power supply voltage: Check voltage across the terminals 5 (+) – 6 (-) with a voltmeter.
- Installation conditions: Check ambient temperature. Check also that there are not excessive dust particles around. Check that there is no vibration.