

## Rack-mounted DCS Signal Conditioners 18-RACK


### THERMOCOUPLE ALARM

#### Functions & Features

- Providing relay contact closures at preset input levels
- Direct input from a thermocouple
- Burnout protection
- High-accuracy cold junction compensation
- Single or dual (Hi/Lo) trip
- Front accessed screwdriver setpoint adjustments
- Enclosed relays

#### Typical Applications

- Annunciator
- Various alarm applications



### MODEL: 18AT-[1][2]-R[3]

#### ORDERING INFORMATION

- Code number: 18AT-[1][2]-R[3]

Specify a code from below for each of [1] through [3].

(e.g. 18AT-25-R/BL)

- Temperature range (e.g. 0 – 800°C)

Use Ordering Information Sheet (No. ESU-1033) to specify alarm output code 0 specifications.

#### [1] INPUT THERMOCOUPLE

- 1: (PR) (Usable Range 0 to 1760°C, 32 to 3200°F)
- 2: K (CA) (Usable range -270 to +1370°C, -454 to +2498°F)
- 3: E (CRC) (Usable range -270 to +1000°C, -454 to +1832°F)
- 4: J (IC) (Usable range -210 to +1200°C, -346 to +2192°F)
- 5: T (CC) (Usable range -270 to +400°C, -454 to +752°F)
- 6: B (RH) (Usable range 0 to 1820°C, 32 to 3308°F)
- 7: R (Usable range -50 to +1760°C, -58 to +3200°F)
- 8: S (Usable range -50 to +1760°C, -58 to +3200°F)
- N: N (Usable range -270 to +1300°C, -454 to +2372°F)
- 0: Specify

#### [2] ALARM OUTPUT

- 1: Hi (coil energized at alarm)
- 2: Hi (coil de-energized at alarm)
- 3: Lo (coil energized at alarm)

- 4: Lo (coil de-energized at alarm)
- 5: Hi/Lo; N.O., OFF in power failure (connector output not available)
- 6: Hi/Lo; N.C., OFF in power failure (connector output not available)
- 0: Specify

#### POWER INPUT

DC Power

R: 24 V DC

(Operational voltage range 24 V ±10 %, ripple 10 %p-p max.)

#### [3] OPTIONS

Burnout

blank: Upscale burnout

/BL: Downscale burnout

/BN: No burnout

#### GENERAL SPECIFICATIONS

**Construction:** Rack-mounted; terminal access via screw terminals on the front and connector on the rear; terminal cover provided

#### Connection

**Input:** M3.5 screw terminals (torque 0.8 N·m)

**Alarm output:** M3.5 screw terminals (torque 0.8 N·m) and connector

**Power input:** Supplied from connector

**Screw terminal:** Nickel-plated steel

**Isolation:** Input to output to power

**Relay:** Enclosed

**Setpoint adjustments:** Multi-turn screwdriver adjustments (front); -5 – +105 % independently

**Cold junction compensation:** CJC sensor attached to the input terminals (B thermocouple is without CJC as standard)

**Hysteresis (deadband):** Approx. 1 %

**Front LEDs:** Red LED turns on when the coil is energized.

#### INPUT SPECIFICATIONS

**Input:** Thermocouples

**Minimum span:** 3 mV

**Offset:** Max. 1.5 times span

**Input resistance:** 20 kΩ minimum

**Burnout sensing:** 0.1 μA

(PR): Min. Span 370°C, 670°F

K (CA): Min. Span 75°C, 140°F

E (CRC): Min. Span 50°C, 90°F

J (IC): Min. Span 60°C, 110°F

T (CC): Min. Span 75°C, 140°F

B (RH): Min. Span 780°C, 1410°F

R: Min. Span 360°C, 650°F

S: Min. Span 380°C, 690°F

N: Min. Span 110°C, 200°F

(at over 400°C or 750°F for R, S and PR; over 770°C or 1420°F for B)

**Response time:** ≤ 0.5 sec. (0 – 100 % at 90 % setpoint)

**Burnout response:** ≤ 10 sec.

**Line voltage effect:** ±0.1 % over voltage range

**Insulation resistance:** ≥ 100 MΩ with 500 V DC

**Dielectric strength:** 1500 V AC @ 1 minute

(input to output or power)

500 V AC @ 1 minute (output to power)

1500 V AC @ 1 minute (input or output or power to ground)

## OUTPUT SPECIFICATIONS

**Output:** Enclosed SPST and SPDT relays

**Rating:** 120 V AC @ 1 A (cos φ = 1)

30 V DC @ 1 A (resistive load)

0.2 A maximum for the connector output

**Maximum switching voltage:** 120 V AC or 30 V DC

**Max. switching power:** 120 VA or 30 W (24 VA or 6 W for the connector output)

**Minimum load:** 5 V DC @ 10m A

**Mechanical life:** 5 × 10<sup>7</sup> cycles

### • Single Alarm

#### Front terminals

	5 – 6	5 – 7
Energized	ON	OFF
De-energized (or power OFF)	OFF	ON

#### Rear connector

ALARM OUTPUT CODE	POWER ON		POWER OFF
	IN < SET	IN > SET	
1	OFF	ON	OFF
2	OFF	ON	ON
3	ON	OFF	OFF
4	ON	OFF	ON

### • Dual Alarm (front terminals)

ALARM OUTPUT CODE	POWER ON				POWER OFF	
	IN < SET		IN > SET		5 – 6	7 – 8
	5 – 6	7 – 8	5 – 6	7 – 8		
5	ON	OFF	OFF	ON	OFF	OFF
6	OFF	ON	ON	OFF	OFF	OFF

Shades indicates that the relay is energized.

## INSTALLATION

**Current consumption:** Approx. 80 mA

**Operating temperature:** -5 to +55°C (23 to 131°F)

**Operating humidity:** 30 to 90 %RH (non-condensing)

**Mounting:** Standard Rack 18BXx or 18KBXx

**Weight:** 150 g (0.33 lb)

## PERFORMANCE in percentage of span

**Trip point repeatability:** ±0.1 %

**Cold junction compensation error**

(at 20°C ±10°C or 68°F ±18°F)


**K, E, J, T, N:** ±0.5°C or ±0.9°F

**S, R, PR:** ±1°C or ±1.8°F


**Temp. coefficient:** ±0.015 %/°C (±0.008 %/°F)

## EXTERNAL VIEW


### ■ SINGLE ALARM

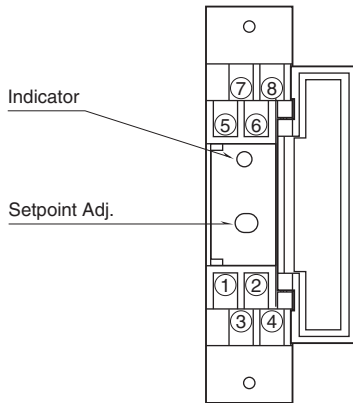


### ■ DUAL ALARM

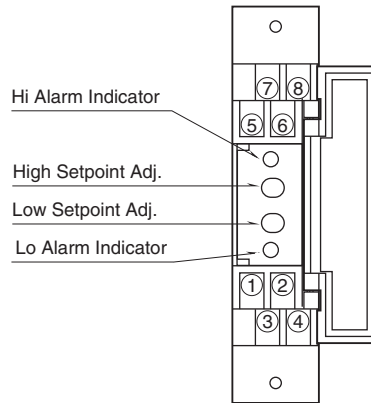

## EXTERNAL DIMENSIONS unit: mm [inch]

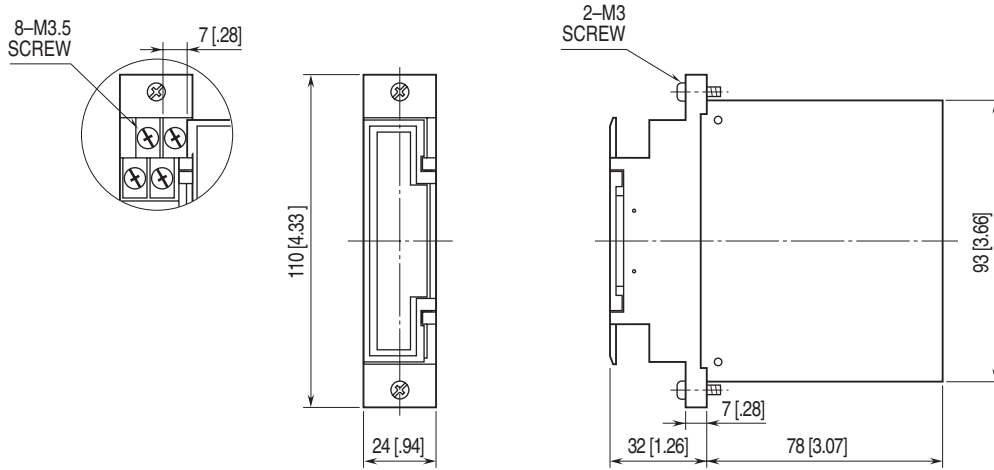


## TERMINAL ASSIGNMENTS

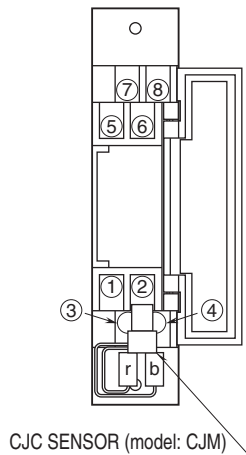


## SCHEMATIC CIRCUITRY & CONNECTION DIAGRAM

### ■ SINGLE ALARM

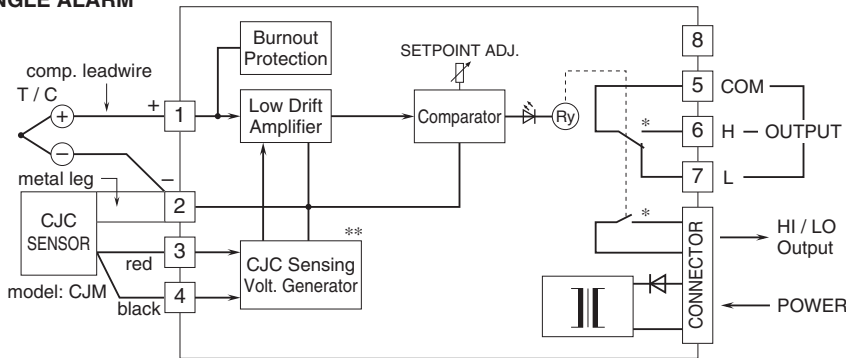


### ■ Relay Protection


#### •AC Powered



#### •DC Powered



### ■ DUAL ALARM

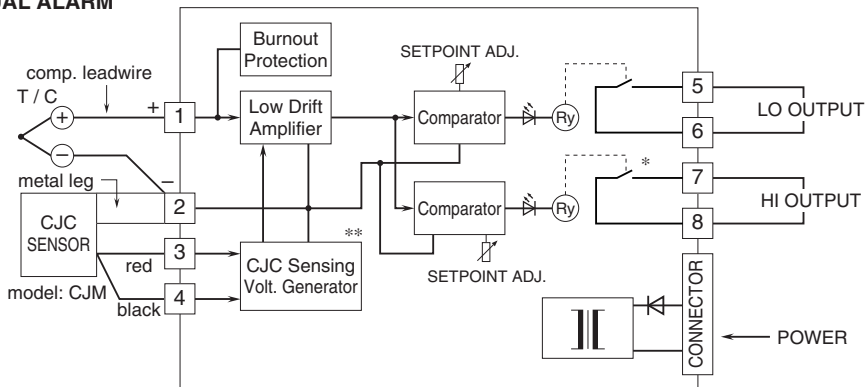

\* Relay status is determined by output codes.

\*\*Deleted with B thermocouple



Specifications are subject to change without notice.