

## DCS Input/Output Relay Card Series

### INPUT RELAY CARD

MODEL **38N-5**

#### DESCRIPTIONS

The 38N-5 is a DCS-front-end use relay card installed in a dedicated 19-inch rack, used to convert a field SW signal into a DCS input.

- Contact input
- Two re-transmitted outputs (dry contact and voltage contact)
- Test switch useful for the DCS debugging and test running
- 0.5A fuse for the voltage output

#### MODEL & SUFFIX CODE SELECTION

**38N-5**

MODEL \_\_\_\_\_

INPUT CARD \_\_\_\_\_

5 : DCS input use

#### ORDERING INFORMATION

Specify code number. (e.g. 38N-5)

#### RELATED PRODUCTS

- Standard rack (model: 38N-BY1, -BH1)

#### GENERAL SPECIFICATIONS

**Construction:** Rack mounted; terminal access via screw terminals at the front and via card-edge connector at the rear

##### Connection

**Input:** M3.5 screw terminals

**DCS input:** Card-edge connector

**Dry/voltage contact output:** M3.5 screw terminals

**Screw terminal material:** Nickel-plated steel  
(torque 0.8 N·m)

**Power input:** Supplied via card-edge connector

**Fuse for voltage output:** 0.5A incorporated

**Alarm:** Dry contact output at the rack terminal when the fuse is blown.

**Isolation:** DCS input to power or external contact to re-transmitted output (dry contact) to re-transmitted output (voltage contact) or power for voltage output to fuse alarm output

**Indicator LED:** Orange light turns on with the output ON

#### INPUT

■ **EXTERNAL CONTACT (field SW):** Dry contact  
**Contact detecting:** 24V DC @30mA (approx.)

#### OUTPUT

■ **DCS INPUT:** Dry contact  
**Minimum load:** 5V DC @10mA

■ **RE-TRANSMITTED OUTPUT:** Dry contact  
**Rated load:** 250V AC @3A ( $\cos\phi=1$ )  
30V DC @3A (resistive load)  
Electrical life  $10^5$  cycles (rate 30/min.)

**Maximum switching voltage:** 264V AC or 100V DC

**Maximum switching power:** 750VA or 90W

**Minimum load:** 5V DC @10mA

**Mechanical life:**  $5 \times 10^7$  cycles

**External protection:** Contact protection and noise quenching recommended when driving an inductive load (coil, etc.)

■ **RE-TRANSMITTED OUTPUT:** Voltage contact

**Rated load:** 100V AC @0.5A ( $\cos\phi=1$ )  
30V DC @0.5A (resistive load)  
Electrical life  $10^5$  cycles (rate 30/min.)

**Maximum switching voltage:** 125V AC or 30V DC

**Maximum switching power:** 50VA or 15W

**Minimum load:** 5V DC @10mA

**Mechanical life:**  $5 \times 10^7$  cycles

**External protection:** Contact protection and noise quenching recommended when driving an inductive load (coil, etc.)

■ **FUSE ALARM OUTPUT:** Dry contact

**Rated load:** 50V AC @0.5A ( $\cos\phi=1$ )  
30V DC @0.5A (resistive load)  
Electrical life  $10^5$  cycles (rate 30/min.)

**Maximum switching voltage:** 50V AC or 30V DC

**Maximum switching power:** 25VA or 15W

**Minimum load:** 5V DC @10mA

**Mechanical life:**  $5 \times 10^7$  cycles

**External protection:** Contact protection and noise quenching recommended when driving an inductive load (coil, etc.)


### INSTALLATION

**Power input:** Operational voltage range 24V DC  $\pm 10\%$ , ripple 10% p-p max., approx. 40mA  
**Operating temperature:** -5 to +55°C (23 to 131°F)  
**Operating humidity:** 30 to 90% RH (non-condensing)  
**Dimensions:** W23×H149×D102 mm (0.91"×5.87"×4.02")  
**Weight:** 150 g (0.33 lbs)


### PERFORMANCE

**Insulation resistance:**  $\geq 100M\Omega$  with 500V DC (DCS input to power or external contact to re-transmitted output (dry contact) to re-transmitted output (voltage contact) or power for voltage output to fuse alarm output)  
**Dielectric strength:** 1000V AC @1 minute (DCS input to power or external contact to re-transmitted output (dry contact) to re-transmitted output (voltage contact) or power for voltage output to fuse alarm output)

### FRONT VIEW

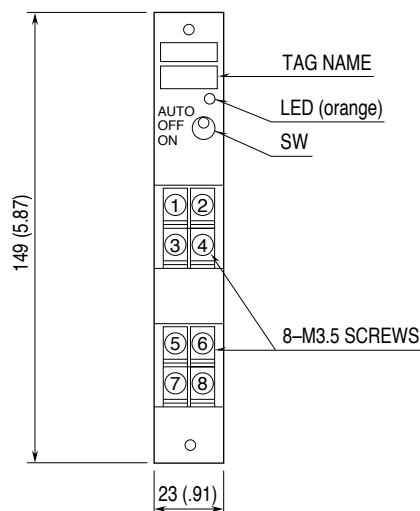

### SCHEMATIC CIRCUITRY & CONNECTION DIAGRAM

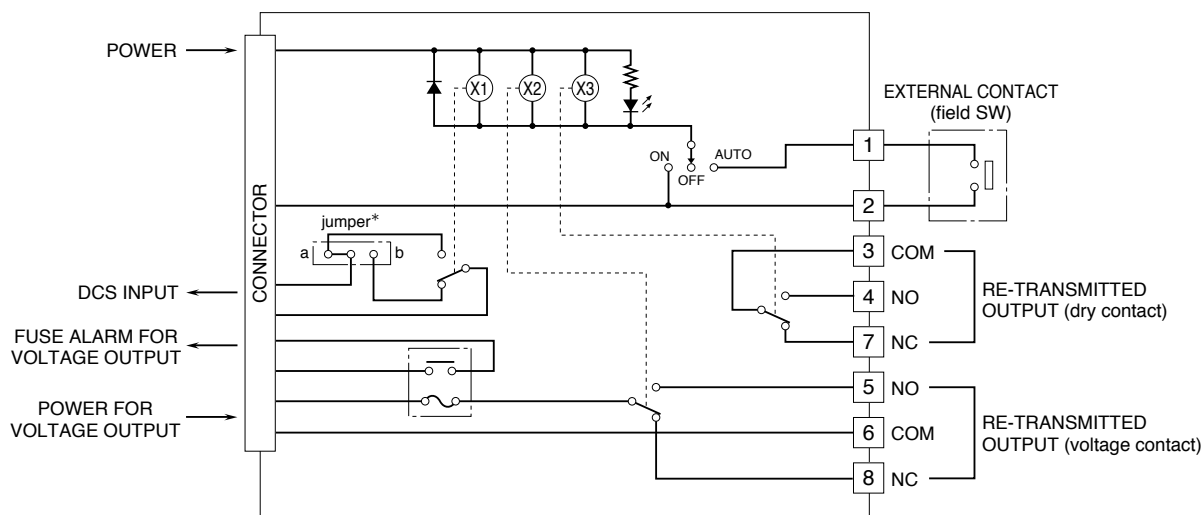

\*The jumper is factory set N.O. (position "a")  
 Select position "b" for N.C.