


**Field Network Modules 61-UNIT Series**

**ANALOG I/O MODULE**

(Multiplex Transmission System)

**Functions & Features**

- Interfacing analog I/O signals from/to Mini-M or Pico-M modules with Multiplex Transmission System
- Saving power and I/O wiring inside an instrumentation panel



**MODEL: 61S-16[1]-[2][3]**

**ORDERING INFORMATION**

- Code number: 61S-16[1]-[2][3]
- Specify a code from below for each of [1] through [3].  
(e.g. 61S-161-K/Q)
- Specify the specification for option code /Q  
(e.g. /C01)

**NO. OF CHANNELS**

16: 16 points

**[1] I/O TYPE**

- 1: Input
- 2: Output

**[2] POWER INPUT**

AC Power  
**K:** 85 - 132 V AC  
 (Operational voltage range 85 - 132 V, 47 - 66 Hz)  
 DC Power  
**R:** 24 V DC  
 (Operational voltage range 24 V ±10 %, ripple 10 %p-p max.)  
 (Specify power suffix code R (24 V DC) when the UNIT is to be combined with the M8BS2.)

**[3] OPTIONS**

- blank: none
- /Q: With options (specify the specification)

**SPECIFICATIONS OF OPTION: Q**

- COATING (For the detail, refer to our web site.)
- /C01: Silicone coating
- /C02: Polyurethane coating
- /C03: Rubber coating

**RELATED PRODUCTS**

- Installation Base (model: M2BS2)
- Installation Base (model: M8BS2)

**GENERAL SPECIFICATIONS**

**Construction:** Plug-in

**Connection**

**SIN-NET, RUN contact output:** Euro type connector terminal (applicable wire size: 0.2 to 2.5 mm<sup>2</sup>, stripped length 7 mm)

**I/O:** Via Installation Base (model: MxBS2)

**Power input:** Via Installation Base (model: MxBS2)

**Housing material:** Flame-resistant resin (black)

**Isolation:** I/O to SIN-NET to RUN contact output to power

**Power indicator:** Red LED turns ON in normal conditions; OFF when the voltage level becomes low.

**RUN indicator:** Red LED turns ON when the selfdiagnosis proves normal, OFF in an abnormality.

■ **RUN Contact Output:** Contact opens at error

**Rated load:** 30 V DC @ 0.4 A (resistive load)

**Maximum switching voltage:** 125 V DC

**Maximum switching power:** 60 W

**Minimum load:** 10 mV DC @ 1 mA

**Mechanical life:** 5 x 10<sup>7</sup> cycles

**Self-diagnosis**

**Communication:** The receiver modules detect loss of communication and wire break.

**CPU:** Watch-dog timer

**Memory:** Sum check

**Power voltage:** Detects when the voltage supply to the CPU drops.

## COMMUNICATION

**Configuration:** Multi-drop  
**Standard:** Conforms to EIA RS-422  
**Communication:** 2-wire, half-duplex  
**Transmission speed:** 125 kbps  
**Control procedure:** SDLC  
**Data encoding:** NRZ  
**Protocol:** SIN-NET (dedicated protocol)  
**Error check:** CRC  
**Transmission distance:** 500 m  
**Transmission media:** Twisted-pair cable CPEV-0.9 dia.  
**Station No.:** Rotary switch  
**Terminator:** Incorporated (remove jumper pin with those modules not located at the end of transmission line)

**Dielectric strength:** 1500 V AC @ 1 minute (I/O to SIN-NET to RUN contact output to power)

## INPUT SPECIFICATIONS

### ■ Analog Input

**Input range:** 1 - 5 V DC  
**Input resistance:**  $\geq 1 \text{ M}\Omega$   
(Each input must be isolated by signal conditioners. Non-isolated modules such as M2BW and M8BW are not usable.)  
**A / D conversion**  
**Moving averaging:** 4 samples  
**Sampling rate:** 160 ms

## OUTPUT SPECIFICATIONS

### ■ Analog Output

**Output range:** 1 - 5 V DC  
**Load resistance:** 20 k $\Omega$  minimum  
(Output must be isolated with signal conditioners.  
When the transmission line is open, the last value sampled before failure is held. Non-isolated modules such as M2BW and M8BW are not usable. )

## INSTALLATION

**Power consumption**  
•AC: Approx. 4 VA  
•DC: Approx. 4 W (160 mA)  
**Operating temperature:** -5 to +55°C (23 to 131°F)  
**Operating humidity:** 30 to 90 %RH (non-condensing)  
**Atmosphere:** No corrosive gas or heavy dust  
**Mounting:** Installation Base (model: MxBS2)  
**Weight:** 250 g (0.55 lb)

## PERFORMANCE in percentage of span

**A/D conversion:**  $\pm 0.1 \%$   
**D/A conversion:**  $\pm 0.1 \%$   
**Temp. coefficient:**  $\pm 0.015 \%/^{\circ}\text{C}$  ( $\pm 0.008 \%/^{\circ}\text{F}$ )  
**Permissible power failure duration:**  $\leq 10 \text{ msec.}$   
**Insulation resistance:**  $\geq 100 \text{ M}\Omega$  with 500 V DC

**DESCRIPTIONS****■ RUN Contact Output (LED) Behaviors****• Input module**

The LED for the Input Modules turns ON when the network is on-line.

When there is an abnormality in the network, the LED turns OFF.

The network is reconfigured after an abnormality.

**• Output module**

The LED for the Output Modules turns ON when the network is on-line and the module receives data from the corresponding Input Module.

When there is an abnormality in the network or there is no data receiving, the LED turns OFF.

**■ Station Number (Address)****A) 1 input module and X output modules:**

Match the address for input and output modules.

**B) Computer interface:**

Set address numbers to correspond with the computer as output module.

**■ Transmission Time**

Integrate all the transmission time for each process input module in the system.

**• Analog input 16 points: 24 msec.**

An analog module does not transmit all its signals in serial but does 1 point per each cycle. For example, when 1 contact input module (DLA1, 32 points) and 1 analog input module (16 points) are connected, 32-point contact signal and 1 point analog signal are transmitted in turn.

One cycle time is therefore calculated as:

$$32 \text{ points} \times 1.5 \text{ msec.} + 24 \text{ msec.} = 72 \text{ msec.}$$

This method is beneficial for giving a priority to contact signals which vary rapidly.

**■ Applicable models for use with 61S Input Module**


- 61S-162 (Ao 16 points)
- DLA1-xM1 (Ao 32 points; only the top 16 out of 32 are used)

## ■ TRANSMISSION LINE CONFIGURATION


The multi-drop transmission line containing 22LA1, DLA1 and 61S modules should meet the following conditions.  
Contact M-System's sales office or representatives when designing.

**A) 10 kilometers** at maximum in total system.


**B) 61S modules plus DLA1 units:** One multitransmission line containing a 60S module can consist of a maximum of 16 units within the total distance of 500 m.

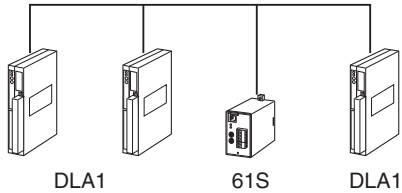


**C) 61S modules plus DLA1 units plus Repeaters (model: DAL4):** DAL4 units can expand the total distance. (6 DAL4 units max.)

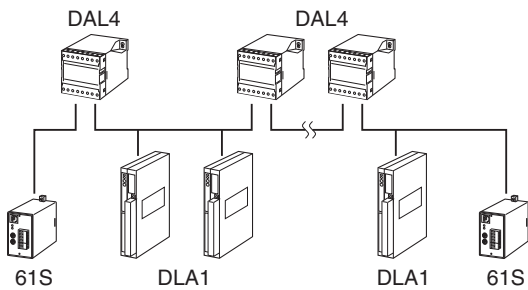


**D) 61S modules plus 22LA1 modules plus DLA1 units:** The total distance of a section consists of 61S and 22LA1 modules is less than 500 meters. They can be connected to DLA1 units via a DLA1-7 unit. (Eight DLA1-7 units max.)

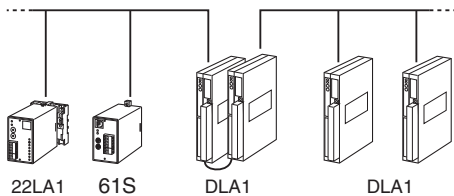


## EXTERNAL VIEW

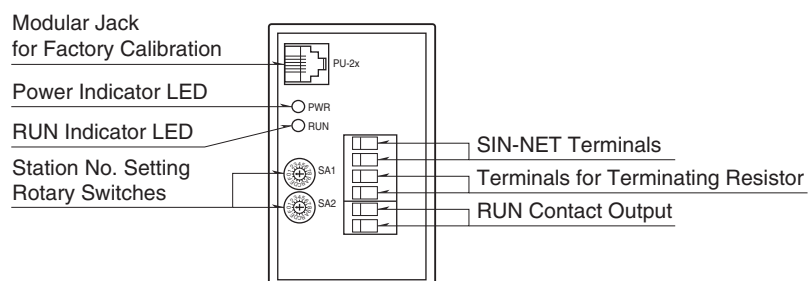

**EXTERNAL DIMENSIONS unit: mm [inch]**

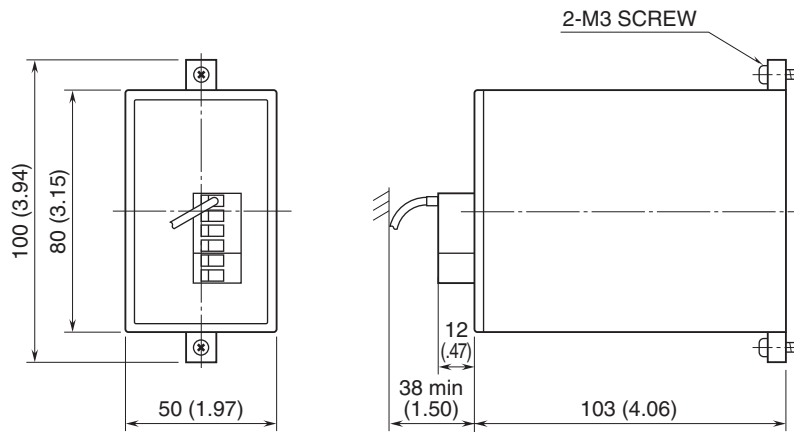

**SCHEMATIC CIRCUITRY & CONNECTION DIAGRAM**

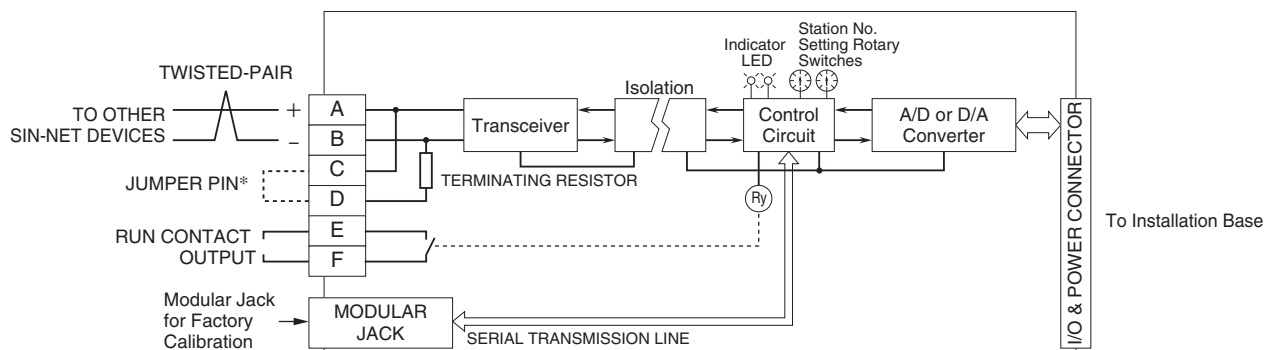

\* When the unit is located at the end of transmission line via twisted-pair cable (= no cross-wiring), short across terminals C - D with the jumper pin (or wire) provided with the unit. Remove the jumper pin for the one not located at the end.



Specifications are subject to change without notice.