

Remote I/O R7I4D Series


EtherCAT I/O MODULE

(high-speed DC voltage input, DC current input, 4 points each, non-isolated, e-CON connector)

Functions & Features

- 4 points high-speed DC voltage input and 4 points DC current input module for EtherCAT
- Easy parameter setting of individual channels with the configurator software

EtherCAT® is a registered trademark and patented technology, licensed by Beckhoff Automation GmbH, Germany.

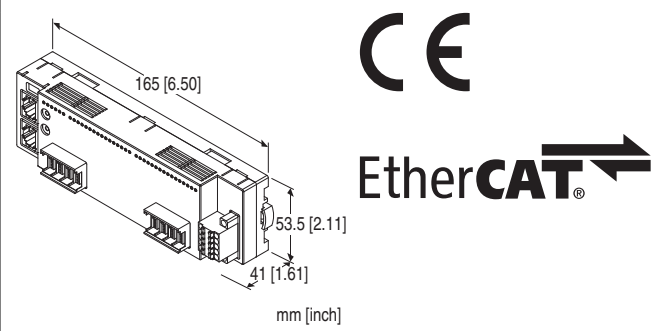

MODEL: R7I4DECT-1-SVSF8N-R[1]

ORDERING INFORMATION

- Code number: R7I4DECT-1-SVSF8N-R[1]
- Specify a code from below for [1].
(e.g. R7I4DECT-1-SVSF8N-R/Q)
- Specify the specification for option code /Q
(e.g. /C01/SET)

TERMINAL BLOCK

- 1: Tension clamp terminal block for power supply
RJ-45 Modular jack for communication
e-CON connector for I/O

I/O TYPE

SVSF8N: DC voltage input & DC current input, high-speed, 4 points each (non-isolated)

POWER INPUT

DC Power
R: 24 V DC
(Operational voltage range 24 V \pm 10 %, ripple 10 %p-p max.)

[1] OPTIONS

blank: none
/Q: With options (specify the specification)

SPECIFICATIONS OF OPTION: Q (multiple selections)

COATING (For the detail, refer to our web site.)
/C01: Silicone coating
/C02: Polyurethane coating
/C03: Rubber coating
EX-FACTORY SETTING
/SET: Preset according to the Ordering Information Sheet (No. ESU-7779-SVSF8N)

RELATED PRODUCTS

- PC configurator software (model: R7CFG)
 - ESI file
- The configurator software and ESI files are downloadable at our web site.
Use a commercially available Mini-B USB cable to connect the unit to a PC.

GENERAL SPECIFICATIONS

Connection
EtherCAT: RJ-45 Modular Jack
Power: Separable screwless spring terminal
Input: e-CON connector
Housing material: Flame-resistant resin (gray)
Isolation: Input to EtherCAT or FE to power
Zero adjustments: Configurable via R7CFG
Span adjustments: Configurable via R7CFG
Input range: Configurable via R7CFG
Number of times of averaging: Configurable via R7CFG
Status indicator LED: PWR, RUN, ERR, L/A IN, L/A OUT
(Refer to the instruction manual.)

EtherCAT COMMUNICATION

Standard: IEEE 802.3u
Transmission type: 100BASE-TX
Transmission speed: Full-duplex 100 Mbps
Transmission media: 100BASE-TX (STP cable; Category 5e)
Maximum internode length: 100 meters
Fixed address: Set with rotary switches
(The master must support MDP.)

INPUT SPECIFICATIONS

Input resistance: \geq 1 M Ω (DC voltage input), 50 Ω (DC current input)
Input range
Xo to X3: -10 - +10 V DC, -5 - +5 V DC, 0 - 10 V DC, 0 - 5 V DC, 1 - 5 V DC

X4 to X7: 4 - 20 mA DC

INSTALLATION

Current consumption: Approx. 40 mA (rated current 8 A)

Operating temperature: -10 to +55°C (14 to 131°F)

Storage temperature: -20 to +65°C (-4 to +149°F)

Operating humidity: 30 to 90 %RH (non-condensing)

Atmosphere: No corrosive gas or heavy dust

Mounting: Surface or DIN rail (35 mm rail)

Weight: 170 g (0.37 lb)

PERFORMANCE

Conversion accuracy: $\pm 0.1\%$

Conversion rate: 2.5 msec. / 8 channels

Data range: 0 - 10000 of the input range

Temp. coefficient: $\pm 0.015\%/^{\circ}\text{C}$ ($\pm 0.008\%/^{\circ}\text{F}$)

Input delay time: ≤ 10 msec. (0 - 90 %)

Insulation resistance: ≥ 100 M Ω with 500 V DC

Dielectric strength: 1500 V AC @ 1 minute

(input to EtherCAT or FE to power)

STANDARDS & APPROVALS

EU conformity:

EMC Directive

EMI EN 61000-6-4

EMS EN 61000-6-2

RoHS Directive

PC CONFIGURATOR

The following parameters can be set with using PC Configurator Software (model: R7CFG)

Refer to the users manual for the R7CFG for detailed operation of the software program.

■ CHANNEL INDIVIDUAL SETTING

PARAMETER	SETTING RANGE	DEFAULT
Unused setting	CH enable, CH disable	CH enable
Input range (X0 to X3)	-10 to +10 V DC -5 to +5 V DC 0 to 10 V DC 0 to 5 V DC 1 to 5 V DC	-10 to +10 V DC
Input range (X4 to X7)	4 to 20 mA DC (fixed)	4 to 20 mA DC
Bias setting	-320.00 to +320.00 (%)	0.00 (%)
Gain setting	-3.2000 to +3.2000	1.0000
Zero scaling value	-32000 to +32000	0
Full scaling value	-32000 to +32000	10000

■ CHANNEL BATCH SETTING

PARAMETER	SETTING RANGE	DEFAULT
No. of moving average	1, 2, 4, 8, 16, 32, 64, 128	1


■ POWER SUPPLY

Cable connector: TFMC1,5 / 5-STF-3,5
(Phoenix Contact) (included in the package)

Applicable wire size: 0.2 – 1.5 mm²; stripped length 10 mm

Recommended solderless terminal

- AI0,25–10YE 0.25 mm² (Phoenix Contact)
- AI0,34–10TQ 0.34 mm² (Phoenix Contact)
- AI0,5–10WH 0.5 mm² (Phoenix Contact)
- AI0,75–10GY 0.75 mm² (Phoenix Contact)
- A1–10 1.0 mm² (Phoenix Contact)
- A1,5–10 1.5 mm² (Phoenix Contact)



- | | |
|---------|------------------|
| 1. PWR+ | Power Supply |
| 2. PWR- | Power Supply |
| 3. FE | Functional earth |
| 4. NC | Unused |
| 5. NC | Unused |

Note: The numbers marked on the connector have no relationship to the pin number of the unit.
Wire according to the instruction manual of the unit.

RESPONSE TIME

- Input module


Response time is time from when a step (0 to 100%) input signal is applied to the input module (slave) until when output from its communication CPU reaches 90% of the final value.

T_{COM} : EtherCAT communication cycle set by the host device (master)
(The cycle is determined in accordance with the system configuration and settings.)

T_{INP} : Input module response time \leq Delay time of input circuit (T_a) + Conversion speed^{*1} (T_b) + Input internal processing time (T_c) (Communication cycle x 2)

*1. Conversion speed x No. of moving averages (1 to 128)

ex.) When No. of moving averages: 1 and EtherCAT communication cycle: 1 msec.,
Input module response time (T_{INP}): Delay time of input circuit (10 msec.) + Conversion speed (2.5 msec.) x No. of moving averages (1) + Input internal processing time (1 msec. x 2) = 14.5 [msec.]

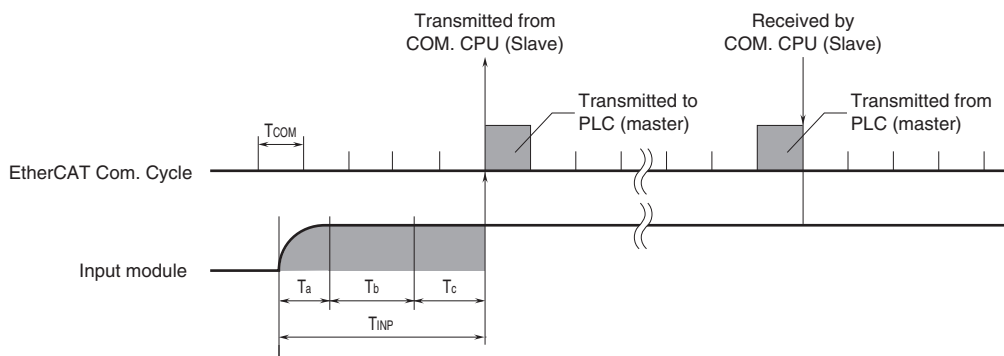

I/O DATA DESCRIPTIONS

Scaling of analog input module is configurable with the configurator software (model: R7CFG). Refer to the software manual for details.

ANALOG INPUT MODULE


Input Area Objects



16 bit binary data

Negative values are represented by 2's complements.

STATUS (Input Area Object)

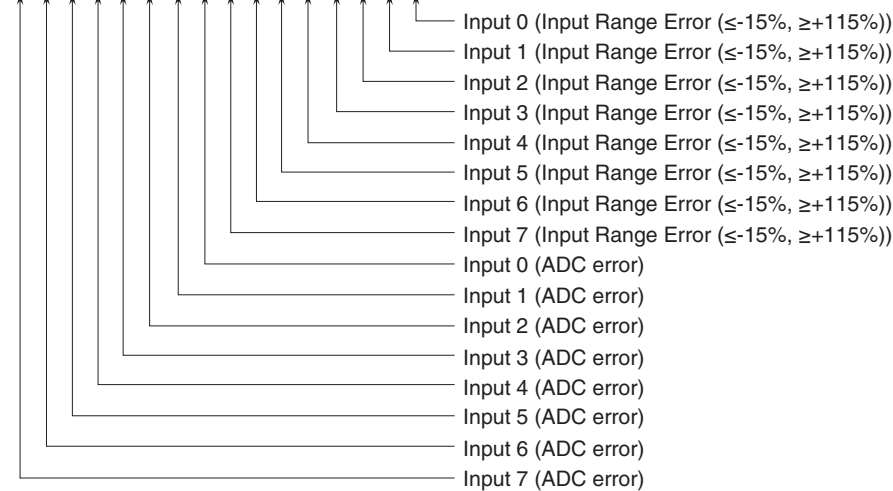


Input Range Error

0 : Normal 1 : Error


ADC error (no response from ADC)

0 : Normal 1 : Error

EXTERNAL DIMENSIONS unit: mm [inch]

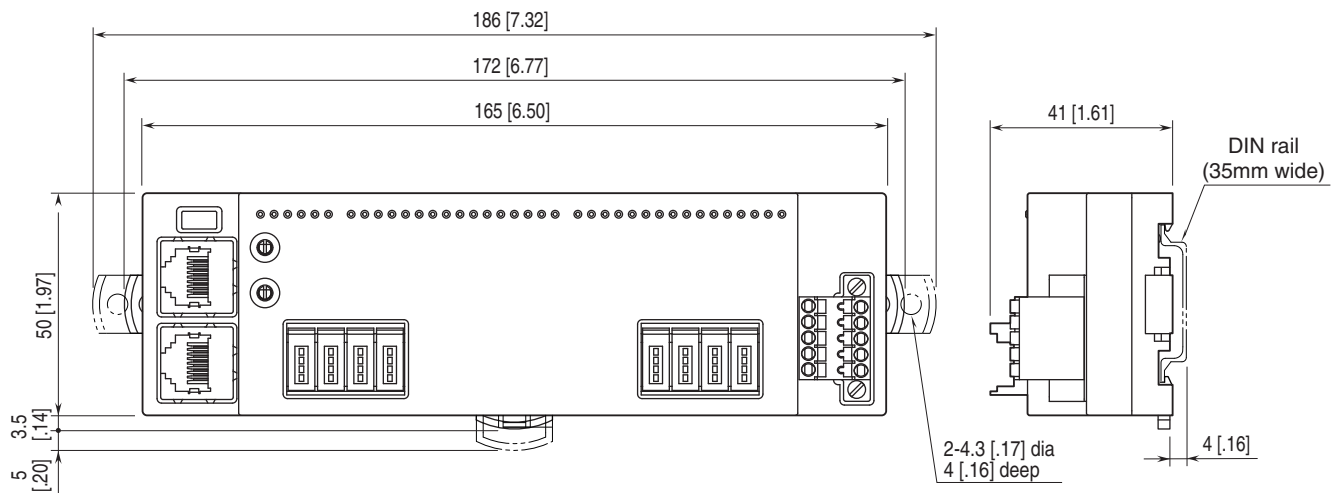


MOUNTING REQUIREMENTS unit: mm [inch]

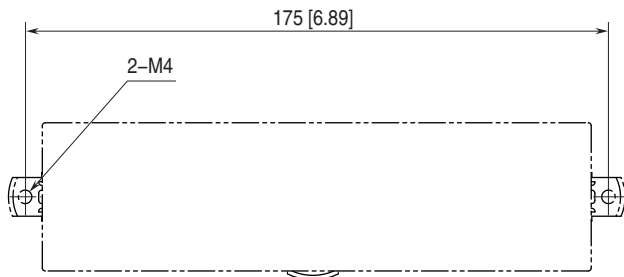

SCHEMATIC CIRCUITRY & CONNECTION DIAGRAM

Note: In order to improve EMC performance, bond the FE terminal to ground.

Caution: FE terminal is NOT a protective conductor terminal.

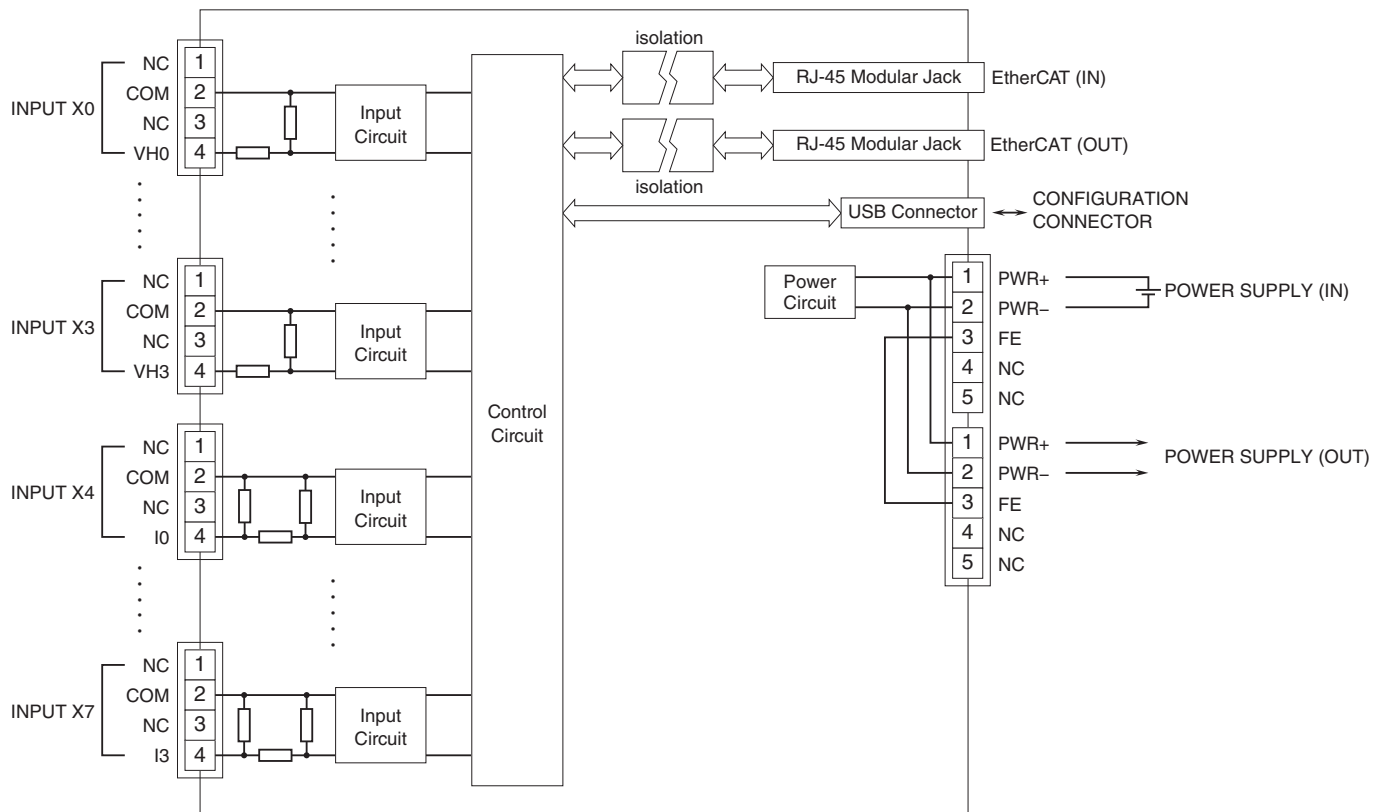

Specifications are subject to change without notice.