


Remote I/O R7 Series

MODBUS I/O MODULE

(relay contact output, 8 points)

Functions & Features

- 8 points relay contact output module for Modbus

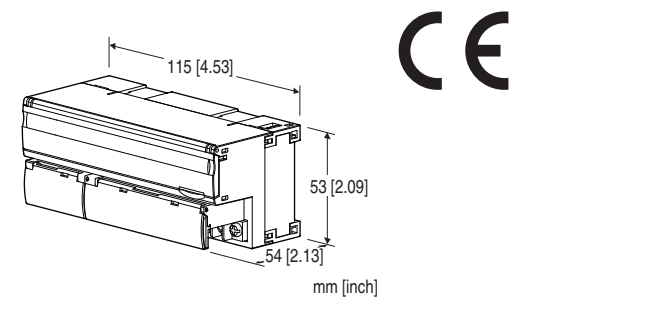

MODEL:R7M-DC8C-R[1]

ORDERING INFORMATION

- Code number: R7M-DC8C-R[1]
- Specify a code from below for [1].
(e.g. R7M-DC8C-R/Q)
- Specify the specification for option code /Q
(e.g. /C01/SET)

I/O TYPE

DC8C: Relay contact output, 8 points

POWER INPUT

DC Power

R: 24 V DC

(Operational voltage range 24 V \pm 10 %, ripple 10 %p-p max.)

[1] OPTIONS

blank: none

/Q: With options (specify the specification)

SPECIFICATIONS OF OPTION: Q (multiple selections)

COATING (For the detail, refer to our web site.)

/C01: Silicone coating

/C02: Polyurethane coating

/C03: Rubber coating

EX-FACTORY SETTING

/SET: Preset according to the Ordering Information Sheet
(No. ESU-7803-G)

CAUTION

- Extension modules cannot be connected.

RELATED PRODUCTS

- PC Configurator cable (model: MCN-CON or COP-US)
 - PC configurator software (model: R7CON)
- Downloadable at our web site.

PACKAGE INCLUDING...

- Terminating resistor (110 Ω , 0.25 W)

GENERAL SPECIFICATIONS

Connection: M3 separable screw terminal (torque 0.5 N·m)

Solderless terminal: Refer to the drawing at the end of the section.

Recommended manufacturer: Japan Solderless Terminal MFG. Co., Ltd., Nichifu Co., Ltd.

Applicable wire size: 0.25 to 1.65 mm² (AWG 22 to 16)

Screw terminal: Nickel-plated steel

Housing material: Flame-resistant resin (gray)

Isolation: Output to Modbus or FG to power

Output at the loss of communication:

Hold the output (*), Reset the output

Selectable with the front DIP SW

(*): Factory default setting


Status indicator LEDs: PWR, RUN, ERR, SD, RD

(Refer to the instruction manual)

Discrete output status indicator LED: LED turns on with output ON

Configurator connection: 2.5 dia. miniature jack

■Recommended solderless terminal



MODBUS COMMUNICATION

Standard: Conforms to TIA/EIA-485-A

Transmission distance: 500 meters max.

Transmission media: Shielded twisted-pair cable
(CPEV-S 0.9 dia.)

Communication parameter: With Configurator Software
(model: R7CON)

- **Data Mode:** RTU (default) or ASCII

- **Parity:** NONE (default), ODD or EVEN

- **Data bit:** 8: RTU (default), 7: ASCII

- **Stop bit:** 1 or 2 (default)

Baud rate setting: With rotary switch

38.4 kbps (default), 19.2 kbps, 9600 bps, 4800 bps

Node address setting: 1 - 99 (with rotary switch) (factory default setting: 00)

Output to power: Basic insulation (150 V)
RoHS Directive

OUTPUT SPECIFICATIONS

Common: 1 common per 4 points (4 terminals)

Maximum load current: 2.0 A per point

Common current: Max. 8 A (4 terminals total)

Maximum outputs applicable at once: No limit (at 24 V DC)

Output supply voltage/current: 24 V DC $\pm 10\%$ / approx. 60 mA

Rated load: 250 V AC¹ @ 2 A ($\cos \phi = 1$)

30 V DC @ 2 A (resistive load)

*1. When it is used as a product relevant to EU directive, it should be used under the Installation Category I, 125 V AC or less.

Maximum switching voltage: 250 V AC, 30 V DC

Maximum switching power: 500 VA (AC), 60 W (DC)

Minimum applicable load: 24 V DC @ 5 mA

Mechanical life: 2×10^7 cycles (300 cycles per min.)

When driving an inductive load, external contact protection and noise quenching recommended.

ON delay time: ≤ 10 msec.

OFF delay time: ≤ 10 msec.

INSTALLATION

Current consumption

• DC: Approx. 60 mA

• Relay driving current: Approx. 60 mA

Operating temperature: -10 to +55°C (14 to 131°F)

Storage temperature: -20 to +65°C (-4 to +149°F)

Operating humidity: 30 to 90 %RH (non-condensing)

Atmosphere: No corrosive gas or heavy dust

Mounting: DIN rail (35 mm rail)

Weight: 200 g (0.44 lb)

PERFORMANCE

Insulation resistance: ≥ 100 M Ω with 500 V DC

Dielectric strength: 1500 V AC @ 1 minute (output to Modbus or FG to power)

STANDARDS & APPROVALS

Refer to the manuals to comply with the standards.

EU conformity:

EMC Directive

EMI EN 61000-6-4

EMS EN 61000-6-2


Low Voltage Directive

EN 61010-1, EN 61010-2-201

Measurement Category II (output)


Pollution Degree 2

EXTERNAL VIEW

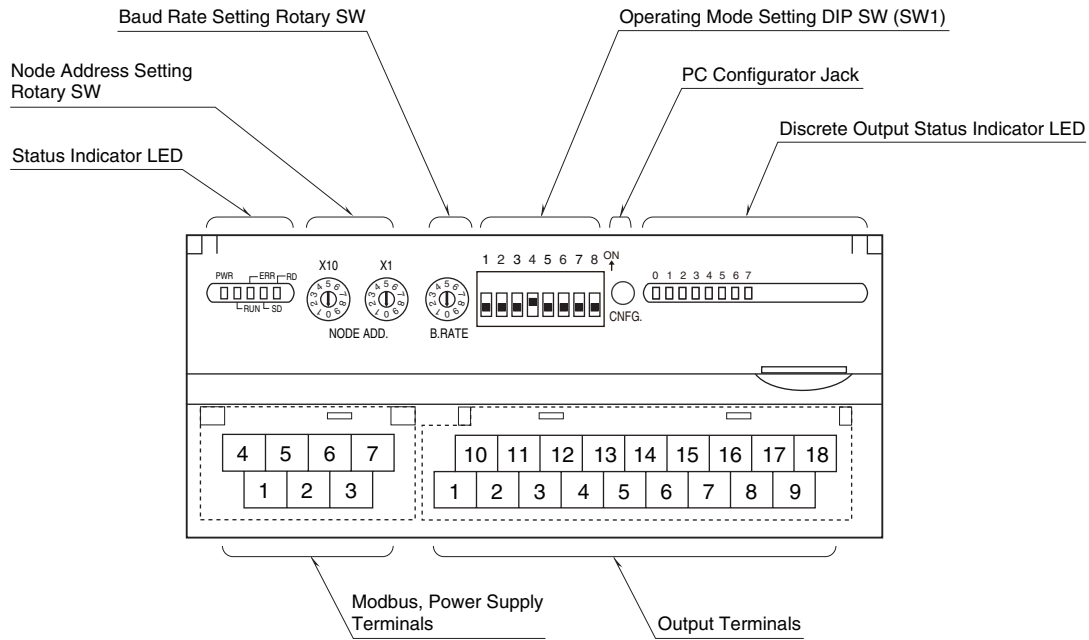

COMMUNICATION CABLE CONNECTIONS

■ MASTER CONNECTION

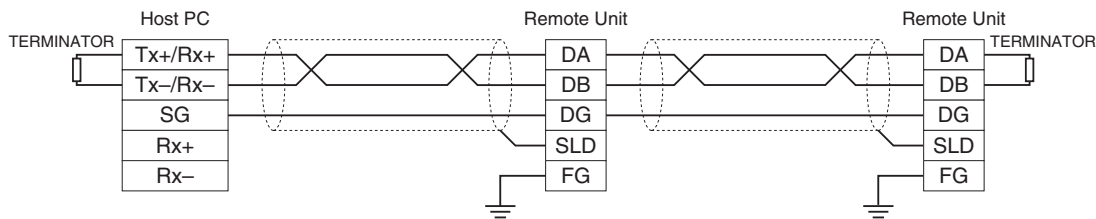

Be sure to connect the terminating resistor included in the product package to the unit at both ends of transmission line.
 The terminator must be connected across DA and DB.
 The Host PC can be located other than at the extreme ends of transmission line.

TERMINAL ASSIGNMENTS

■ OUTPUT TERMINAL ASSIGNMENT

10	11	12	13	14	15	16	17	18
+24V	Y0	Y1	Y2	Y3	Y4	Y5	Y6	Y7
1	2	3	4	5	6	7	8	9
0V	COM0	COM0	COM0	COM0	COM1	COM1	COM1	COM1

NO.	ID	FUNCTION	NO.	ID	FUNCTION
1	0V	0V	10	+24V	24V DC
2	COM0	Common 0	11	Y0	Output 0
3	COM0	Common 0	12	Y1	Output 1
4	COM0	Common 0	13	Y2	Output 2
5	COM0	Common 0	14	Y3	Output 3
6	COM1	Common 1	15	Y4	Output 4
7	COM1	Common 1	16	Y5	Output 5
8	COM1	Common 1	17	Y6	Output 6
9	COM1	Common 1	18	Y7	Output 7

■ POWER SUPPLY, MODBUS TERMINAL ASSIGNMENT

4	5	6	7
DA	DG	+24 V	0V
1	2	3	
DB	SLD	FG	

NO.	ID	FUNCTION, NOTES
1	DB	----
2	SLD	Shield
3	FG	FG
4	DA	----
5	DG	----
6	+24 V	Power input (24 V DC)
7	0 V	Power input (0 V DC)

MODBUS FUNCTION CODES & SUPPORTED CODES

■ Data and Control Functions

CODE	NAME	
01	Read Coil Status	Digital output from the slave
02	Read Input Status	Status of digital inputs to the slave
03	Read Holding Registers	General purpose register within the slave
04	Read Input Registers	Collected data from the field by the slave
05	Force Single Coil	Digital output from the slave
06	Preset Single Register	General purpose register within the slave
08	Diagnostics	
11	Fetch Comm. Event Counter	Fetch a status word and an event counter
12	Fetch Comm. Event Log	A status word, an event counter, a message count and a field of event bytes
15	Force Multiple Coils	Digital output from the slave
16	Preset Multiple Registers	General purpose register within the slave
17	Report Slave ID	Slave type/ 'RUN' status

■ Exception Codes

CODE	NAME	
01	Illegal Function	Function code is not allowable for the slave
02	Illegal Data Address	Address is not available within the slave
03	Illegal Data Value	Data is not valid for the function

■ Diagnostic Subfunctions

CODE	NAME	
00	Return Query Data	Loop back test


MODBUS I/O ASSIGNMENT

	ADDRESS	DATA TYPE	DATA
Coil (0X)	1 – 16		Digital Output (discrete output of the basic module)
	17 – 32		Digital Output (discrete output of the extension module) (unused)
Inputs (1X)	1 – 16		Digital Input (discrete input of the basic module) (unused)
	17 – 32		Digital Input (discrete input of the extension module) (unused)
	33 – 48		Reserved (unused)
	49 – 64		Module Status
	65 – 80		Reserved (unused)
Input Registers (3X)	1 – 48	----	Analog Input (unused)
Holding Registers (4X)	1 – 48	----	Analog Output (unused)


Note: DO NOT access addresses other than mentioned above. Such access may cause problems such as inadequate operation.

■ STATUS

Bit 0 to 7: Fixed to 0.

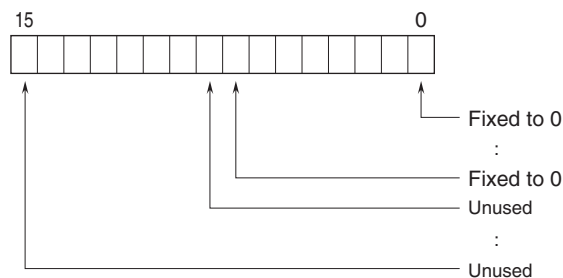


EXTERNAL DIMENSIONS & TERMINAL ASSIGNMENTS unit: mm [inch]

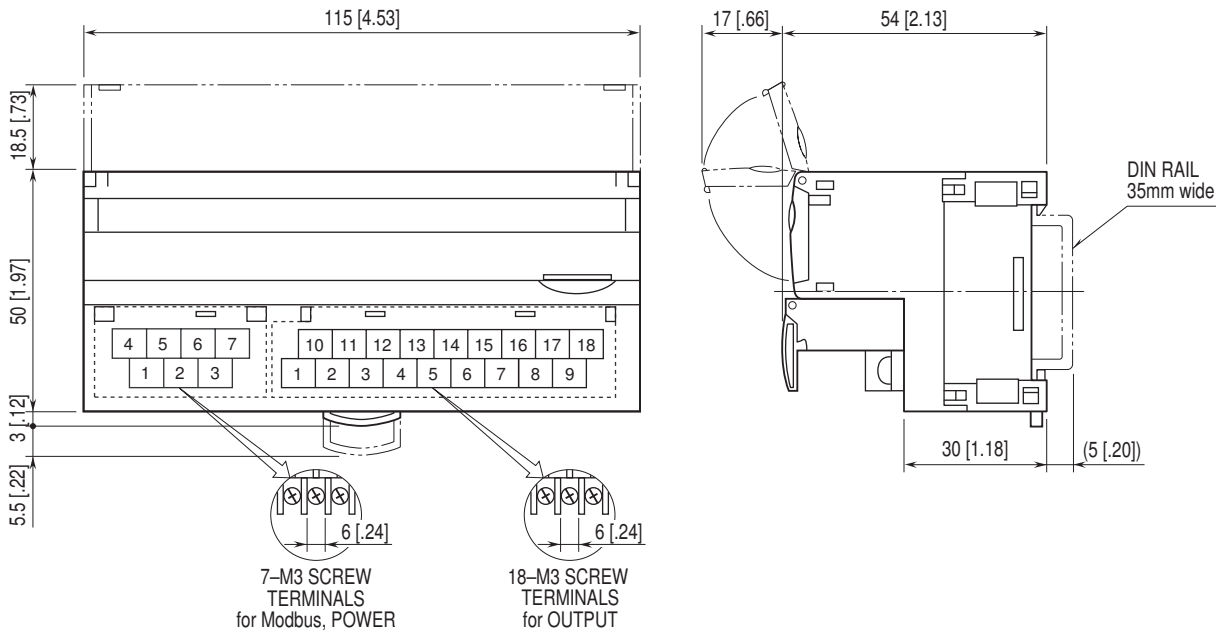

SCHEMATIC CIRCUITRY & CONNECTION DIAGRAM


Note: In order to improve EMC performance, bond the FG terminal to ground.

Caution: FG terminal is NOT a protective conductor terminal.

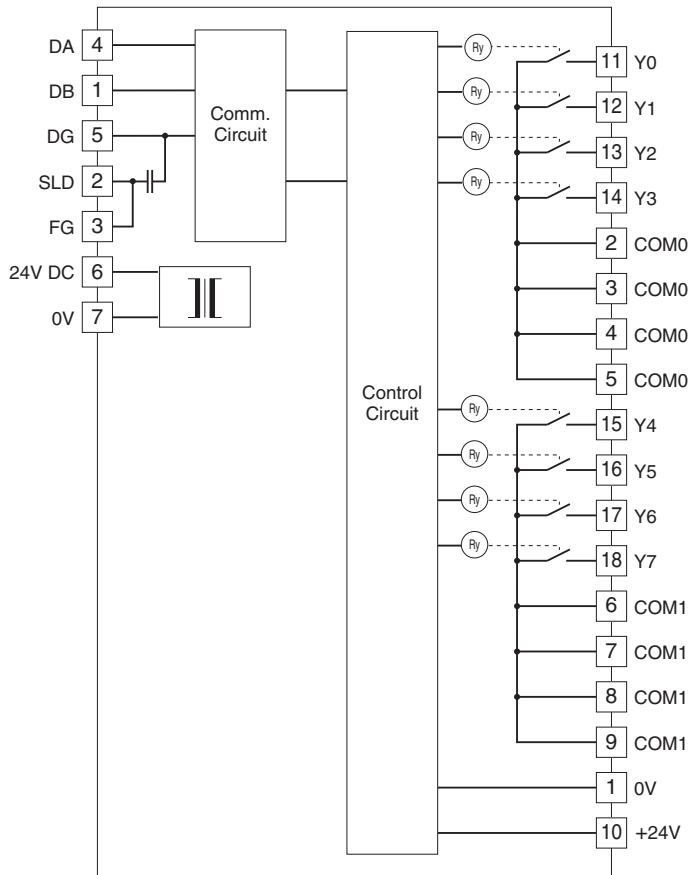


Output Connection Example

4 points / common

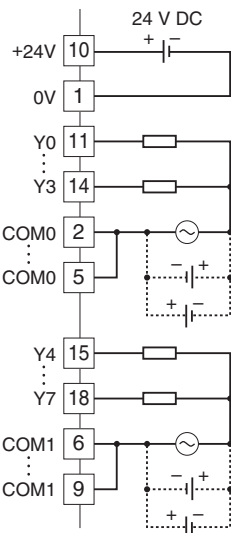

8 points / common

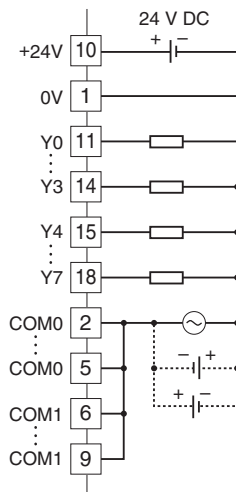

Specifications are subject to change without notice.