


## Remote I/O R7 Series

### MODBUS I/O MODULE

(DC voltage/current input, 4 points, isolated)

#### Functions & Features

- 4 points DC voltage/current input module for Modbus
- Extension module can be connected
- Input range can be selected with the front DIP switches for all channels
- Individual channels, zero adjustment, span adjustment, and scaling can be set with the configurator software (model: R7CON)

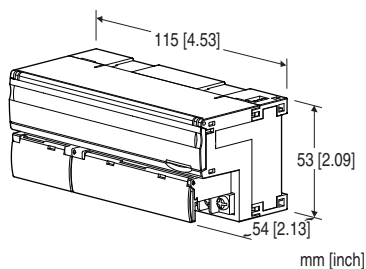

### MODEL:R7M-SV4-R[1]

#### ORDERING INFORMATION

- Code number: R7M-SV4-R[1]
- Specify a code from below for [1].  
(e.g. R7M-SV4-R/Q)
- Specify the specification for option code /Q  
(e.g. /C01/SET)

#### I/O TYPE

**SV4:** DC voltage/current input (10 V/20 mA), 4 points

#### POWER INPUT

##### DC Power

R: 24 V DC

(Operational voltage range 24 V  $\pm$ 10 %, ripple 10 %p-p max.)

#### [1] OPTIONS

##### Standards & Approvals

blank: CE marking

/UL: UL approval, CE marking

##### Other Options

blank: none

/Q: Option other than the above (specify the specification)

(UL not available)

#### SPECIFICATIONS OF OPTION: Q (multiple selections)

##### COATING (For the detail, refer to our web site.)

/C01: Silicone coating

/C02: Polyurethane coating

/C03: Rubber coating

##### EX-FACTORY SETTING

/SET: Preset according to the Ordering Information Sheet  
(No. ESU-7803-A)

#### RELATED PRODUCTS

- PC Configurator cable (model: MCN-CON or COP-US)
- PC configurator software (model: R7CON)  
Downloadable at our web site.
- Discrete input extension module (model: R7M-EAx)
- Discrete output extension module (model: R7M-ECx)

#### PACKAGE INCLUDES...

- Terminating resistor (110  $\Omega$ , 0.25 W)

#### GENERAL SPECIFICATIONS

**Connection:** M3 separable screw terminal (torque 0.5 N·m)

**Solderless terminal:** Refer to the drawing at the end of the section.

**Recommended manufacturer:** Japan Solderless Terminal MFG. Co., Ltd., Nichifu Co., Ltd.

**Applicable wire size:** 0.25 to 1.65 mm<sup>2</sup> (AWG 22 to 16)

**Screw terminal:** Nickel-plated steel

**Housing material:** Flame-resistant resin (gray)

**Isolation:** Input 0 to input 1 to input 2 to input 3 to Modbus or FG to power

**Zero adjustments:** Configurable via R7CON

**Span adjustments:** Configurable via R7CON

**Input range:** Selectable with the DIP SW on the front of the unit or configurable via R7CON

**Extension:** No extension (\*), Discrete input 8 or 16 points, Discrete output 8 or 16 points

Selectable with the front DIP SW

(\* Factory default setting)


**Conversion rate:** Selectable with the front DIP SW

**Status indicator LEDs:** PWR, RUN, ERR, SD, RD

(Refer to the instruction manual)

**Configurator connection:** 2.5 dia. miniature jack

##### ■Recommended solderless terminal



## MODBUS COMMUNICATION

**Standard:** Conforms to TIA/EIA-485-A

**Transmission distance:** 500 meters max.

**Transmission media:** Shielded twisted-pair cable (CPEV-S 0.9 dia.)

**Communication parameter:** With Configurator Software (model: R7CON)

- **Data Mode:** RTU (default) or ASCII
- **Parity:** NONE (default), ODD or EVEN
- **Data bit:** 8: RTU (default), 7: ASCII
- **Stop bit:** 1 or 2 (default)

**Baud rate setting:** With rotary switch  
38.4 kbps (default), 19.2 kbps, 9600 bps, 4800 bps

**Node address setting:** 1 - 99 (with rotary switch) (factory default setting: 00)

## INPUT SPECIFICATIONS

### ■ DC Current

**Input resistance:** 70 Ω

**Input range:** -20 to +20 mA DC, 0 to 20 mA DC, 4 to 20 mA DC

### ■ Narrow span voltage

**Input resistance:** ≥ 100 kΩ

**Input range:** -1 to +1 V DC, 0 to 1 V DC, -0.5 to +0.5 V DC

### ■ Wide span voltage

**Input resistance:** ≥ 1 MΩ

**Input range:** -10 to +10 V DC (\*), -5 to +5 V DC, 0 to 10 V DC, 0 to 5 V DC, 1 to 5 V DC

(\* ) Factory default setting

## INSTALLATION

### Current consumption

•DC: Approx. 90 mA

**Operating temperature:** -10 to +55°C (14 to 131°F)

**Storage temperature:** -20 to +65°C (-4 to +149°F)

**Operating humidity:** 30 to 90 %RH (non-condensing)

**Atmosphere:** No corrosive gas or heavy dust

**Mounting:** DIN rail (35 mm rail)

**Weight:** 200 g (0.44 lb)

## PERFORMANCE

### Conversion rate / conversion accuracy:

10 msec./±0.8 %, 20 msec./±0.4 %, 40 msec./±0.2 %, 80 msec./±0.1 % (\*)

(\* ) Factory setting

**Data range:** 0 - 10000 of the input range

(Scaling of converted data is configurable with the configurator software (model: R7CON))

**Temp. coefficient:** ±0.015 %/°C (±0.008 %/°F)

**Response time:** Conversion rate × 2 + 50 msec. (0 - 90 %)

**Insulation resistance:** ≥ 100 MΩ with 500 V DC

**Dielectric strength:** 1500 V AC @ 1 minute (input 0 to input 1 to input 2 to input 3 to Modbus or FG to power)

## STANDARDS & APPROVALS

Refer to the manuals to comply with the standards.

### EU conformity:

EMC Directive

EMI EN 61000-6-4

EMS EN 61000-6-2

RoHS Directive

### Approval:

UL/C-UL nonincendive Class I, Division 2,

Groups A, B, C, and D


(ANSI/UL 121201, CAN/CSA-C22.2 No.213-17)

UL/C-UL general safety requirements

(UL 61010-1, CAN/CSA-C22.2 No.61010-1)


Note: This equipment is to be supplied by a Class 2 power supply when using as conformity with UL/C-UL.

## EXTERNAL VIEW

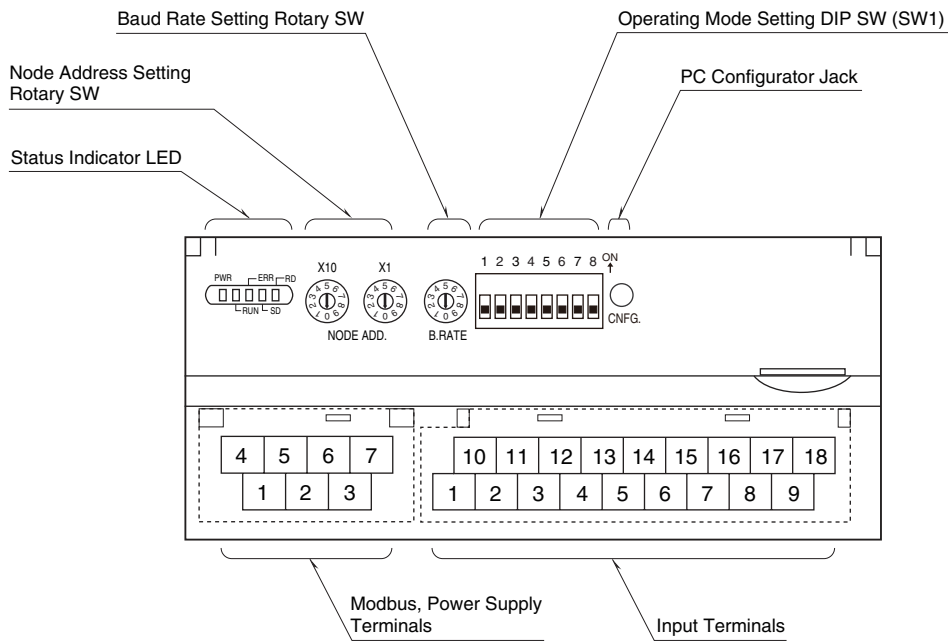

## COMMUNICATION CABLE CONNECTIONS

### ■ MASTER CONNECTION

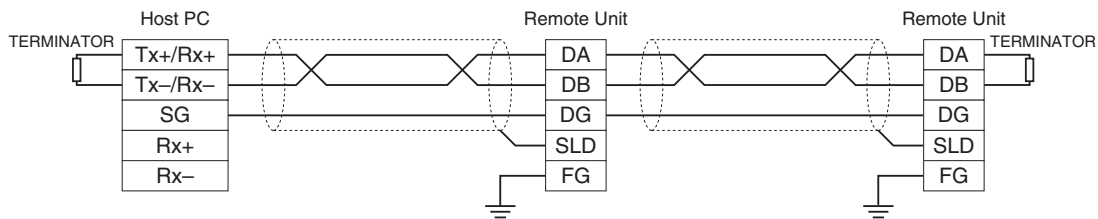

Be sure to connect the terminating resistor included in the product package to the unit at both ends of transmission line.  
 The terminator must be connected across DA and DB.  
 The Host PC can be located other than at the extreme ends of transmission line.

**TERMINAL ASSIGNMENTS**

■ **INPUT TERMINAL ASSIGNMENT**

10	11	12	13	14	15	16	17	18
VL0	I0	VL1	I1	NC	VL2	I2	VL3	I3
1	2	3	4	5	6	7	8	9
VH0	COM0	VH1	COM1	NC	VH2	COM2	VH3	COM3

NO.	ID	FUNCTION	NO.	ID	FUNCTION
1	VH0	Wide span volt. 0	10	VL0	Narrow span volt. 0
2	COM0	Common 0	11	I0	Current range 0
3	VH1	Wide span volt. 1	12	VL1	Narrow span volt. 1
4	COM1	Common 1	13	I1	Current range 1
5	NC	No connection	14	NC	No connection
6	VH2	Wide span volt. 2	15	VL2	Narrow span volt. 2
7	COM2	Common 2	16	I2	Current range 2
8	VH3	Wide span volt. 3	17	VL3	Narrow span volt. 3
9	COM3	Common 3	18	I3	Current range 3

■ **POWER SUPPLY, MODBUS TERMINAL ASSIGNMENT**

4	5	6	7
DA	DG	+24 V	0V
1	2	3	
DB	SLD	FG	

NO.	ID	FUNCTION, NOTES
1	DB	----
2	SLD	Shield
3	FG	FG
4	DA	----
5	DG	----
6	+24 V	Power input (24 V DC)
7	0 V	Power input (0 V DC)

**MODBUS FUNCTION CODES & SUPPORTED CODES**

■ **Data and Control Functions**

CODE	NAME	
01	Read Coil Status	Digital output from the slave
02	Read Input Status	Status of digital inputs to the slave
03	Read Holding Registers	General purpose register within the slave
04	Read Input Registers	Collected data from the field by the slave
05	Force Single Coil	Digital output from the slave
06	Preset Single Register	General purpose register within the slave
08	Diagnostics	
11	Fetch Comm. Event Counter	Fetch a status word and an event counter
12	Fetch Comm. Event Log	A status word, an event counter, a message count and a field of event bytes
15	Force Multiple Coils	Digital output from the slave
16	Preset Multiple Registers	General purpose register within the slave
17	Report Slave ID	Slave type/ 'RUN' status

■ **Exception Codes**

CODE	NAME	
01	Illegal Function	Function code is not allowable for the slave
02	Illegal Data Address	Address is not available within the slave
03	Illegal Data Value	Data is not valid for the function

■ **Diagnostic Subfunctions**

CODE	NAME	
00	Return Query Data	Loop back test

**MODBUS I/O ASSIGNMENT**


	ADDRESS	DATA TYPE	DATA
Coil (0X)	1 – 16		Digital Output (discrete output of the basic module) (unused)
	17 – 32		Digital Output (discrete output of the extension module)
Inputs (1X)	1 – 16		Digital Input (discrete input of the basic module) (unused)
	17 – 32		Digital Input (discrete input of the extension module)
	33 – 48		Reserved (unused)
	49 – 64		Module Status
	65 – 80		Reserved (unused)
Input Registers (3X)	1 – 4	I	Analog Input
	5 – 16	----	Reserved (unused)
	17 – 24	F	Analog Input
	25 – 48	----	Reserved (unused)
Holding Registers (4X)	1 – 48	----	Analog Output (unused)

I : Integer, -1500 – +11500 (-15 – +115%)

F : Floating

Note: DO NOT access addresses other than mentioned above. Such access may cause problems such as inadequate operation.

## ■ STATUS

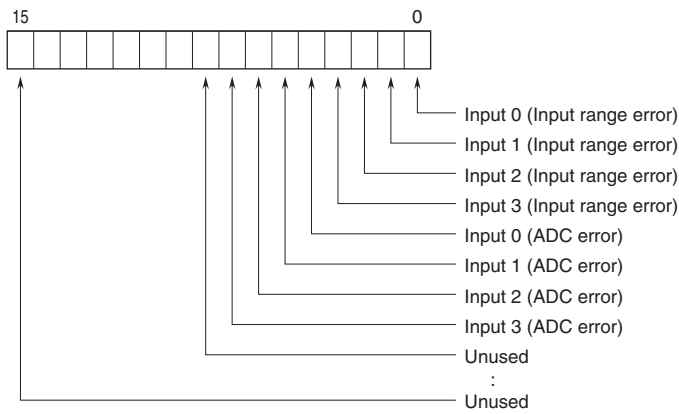

Input range error ( $\leq -15\%$ ,  $\geq +115\%$ )  
 0 : Normal 1 : Error  
 ADC error (no response from ADC)  
 0 : Normal 1 : Error


## DATA CONVERSION

### ■ INPUT RANGE AND DATA CONVERSION (FACTORY DEFAULT SETTING)


Analog input data is converted into digital representations of 0 – 100% proportional to each scaled range. The converted % values are multiplied by 100 and expressed in 16 bits. Overrange input is possible from -15 to +115% of the nominal range. When the signal exceeds the limit, the data is fixed at -15% or +115%.

#### • Input Range 0 – 5V DC

Input Value	Input %	Converted Data, Decimal	Converted Data, Hex
$\leq -0.75V$	-15%	-1500	FA24
0V	0%	0	0
5V	100%	10000	2710
$\geq 5.75V$	115%	11500	2CEC

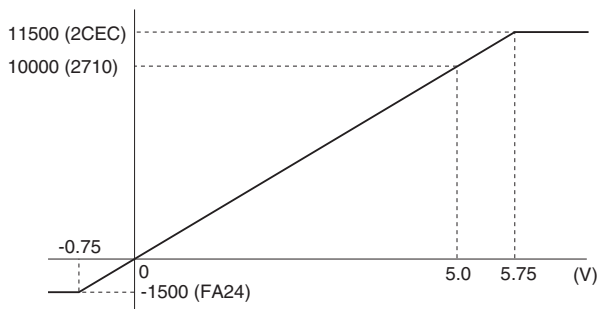


**EXTERNAL DIMENSIONS & TERMINAL ASSIGNMENTS** unit: mm [inch]

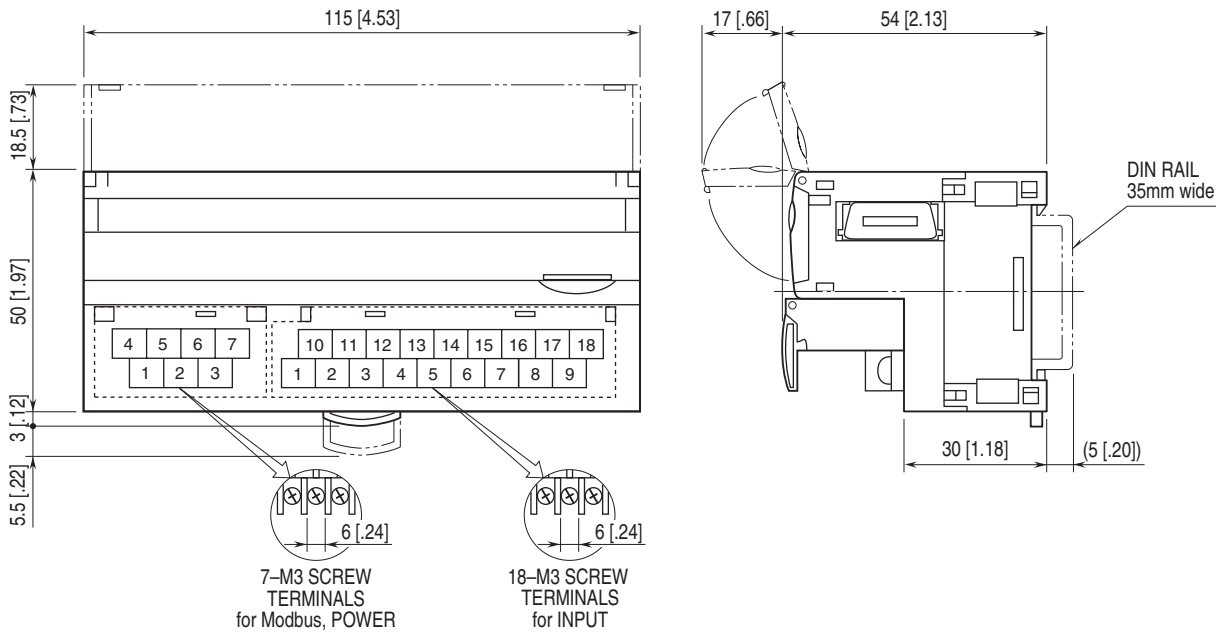


## SCHEMATIC CIRCUITRY & CONNECTION DIAGRAM

Note: In order to improve EMC performance, bond the FG terminal to ground.

Caution: FG terminal is NOT a protective conductor terminal.

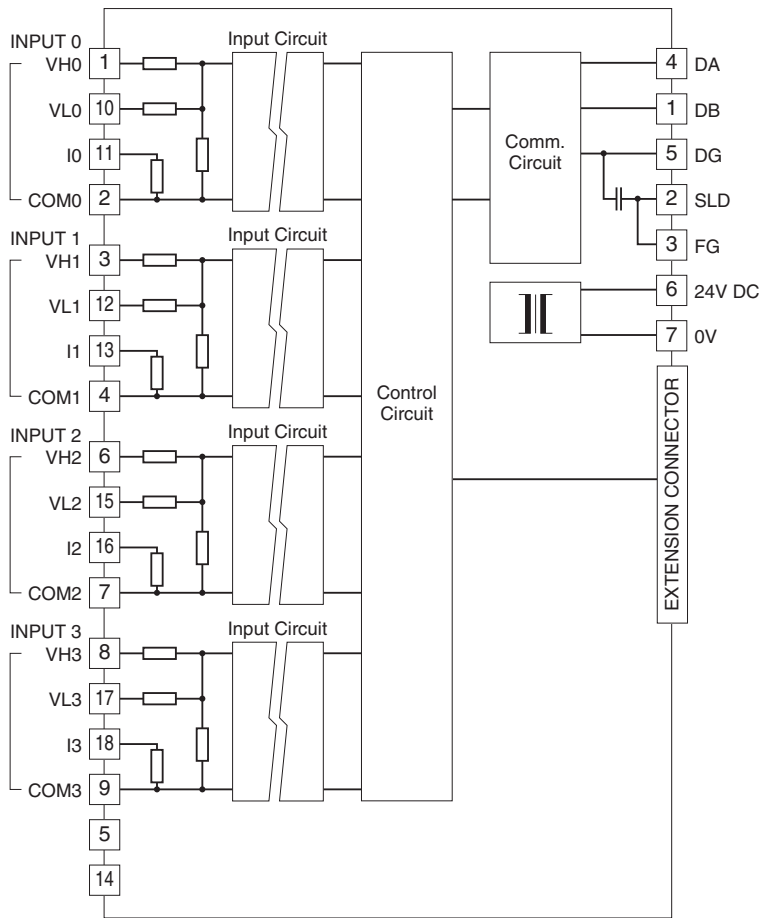

### Input Connection Examples

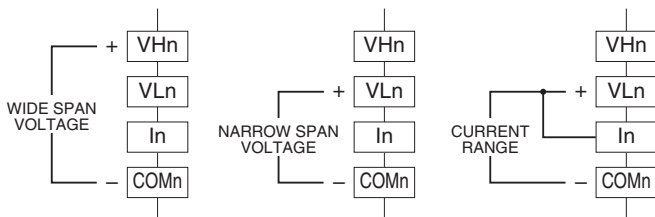

Be sure to close across VLn and In terminals for a current input.



Specifications are subject to change without notice.