

<p>ADAPTOR SET (VOS2T use)</p>	<p>MODEL VOAT</p>
-------------------------------------------	--------------------------

BEFORE USE

Thank you for choosing us. Before use, please check contents of the package you received as outlined below. If you have any problems or questions with the product, please contact our sales office or representatives.

■ SPECIFICATIONS

The VOAT is used to replace the VOS Series with the VOS2T. The adaptor plate with a dedicated lever adjusts the mounting hole positions of the two models without need for extra fitting.

Please confirm the lever size of the VOAT matching that of the existing VOS module.

■ PACKAGE INCLUDES:


- Adaptor plate (1)
- Lever (1)
- Screw to attach the plate (M4)..... (4)
- Connecting pin..... (1)
- Nut with washer for the connecting pin..... (1)
- Nailed nut (1)

INSTALLATION

■ FIXING THE ADAPTOR PLATE

Attach the adaptor plate to the VOS2T with M4 screws included in the product package, and install the assembly where the VOS module was.


• Lever Attached to the Upper Side

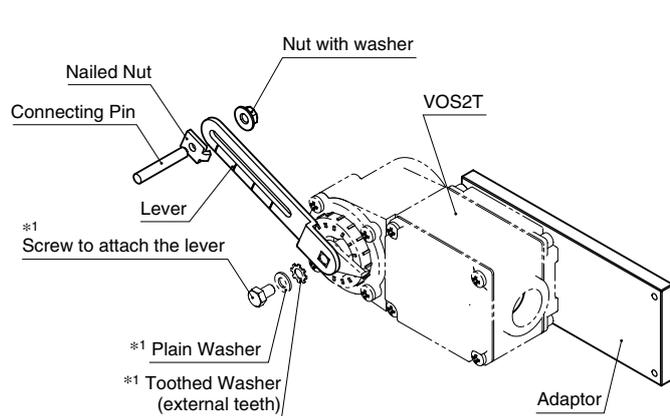

■ ATTACHING & ADJUSTING THE LEVER

Refer to the instruction manual for Model VOS2T (EM-4767) for detailed information.

• Lever Attached to the Lower Side

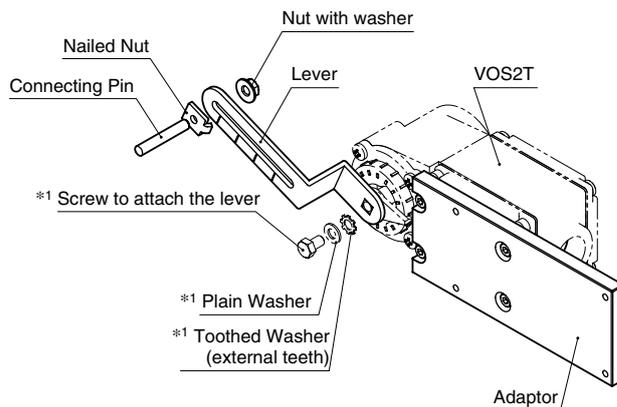

*1. Use the parts from the VOS Series.