


High-density Signal Conditioners 10-RACK

STANDARD RACK

(with air manifold; for 2-wire I/P transducer 10VPN)

Functions & Features

- Standard 19" rack for 2-wire I/P transducers (model: 10VPN)
- 4 - 16 modules mountable
- Supply pressure at the manifold plug

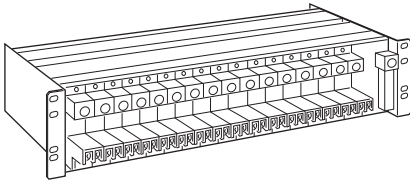

Weight

16 positions: 4.5 kg (9.9 lb)

9 positions: 3.5 kg (7.7 lb)

4 positions: 2.1 kg (4.6 lb)

PERFORMANCE

Maximum supply pressure: 196 kPa

(2 kgf/cm², 1.96 bar, 28 psig)

MODEL: 10BXAN-[1][2]

ORDERING INFORMATION

- Code number: 10BXAN-[1][2]

Specify a code from below for each of [1] and [2].

(e.g. 10BXAN-1/W)

[1] CAPACITY

1: 16 positions

2: 9 positions

3: 4 positions

[2] OPTIONS

Mounting Bracket

blank: Rack mounting, standard

/W: Surface mounting

GENERAL SPECIFICATIONS

Construction: Metal plates assembly

Coating: Zn-Cr (black), aluminized steel

Capacity: 4, 9 or 16 positions

Connection

Pneumatic: Rc 3/8" female (torque ≤ 12 N·m)

Manifold: Aluminium alloy

INSTALLATION

Operating temperature: -5 to +55°C (23 to 131°F)

Operating humidity: 30 to 90 %RH (non-condensing)

Mounting

16 positions: JIS or EIA standard rack or surface

4 or 9 positions: angle bracket or surface



Specifications are subject to change without notice.