

## High-density Signal Conditioners 10-RACK

5: 0 – 5 V DC (Load resistance 500 Ω min.)

6: 1 – 5 V DC (Load resistance 500 Ω min.)


### SQUARE ROOT EXTRACTOR

#### Functions & Features

- Providing two DC outputs proportional to the root of the input signal
- Low-end cutout
- Optional second channel output available at the front terminals and at the Standard Rack connector

#### Typical Applications

- Converting differential pressure to flow



### MODEL: 10FNS-[1][2][3]-R[4]

#### ORDERING INFORMATION

- Code number: 10FNS-[1][2][3]-R[4]
- Specify a code from below for each of [1] through [4].  
(e.g. 10FNS-6A6-R/Q)
- Specify the specification for option code /Q  
(e.g. /C01)

#### [1] INPUT

Current

A: 4 – 20 mA DC (Input resistance 87.7 Ω)

H: 10 – 50 mA DC (Input resistance 100 Ω)

Voltage

6: 1 – 5 V DC (Input resistance 1 MΩ min.)

#### [2] OUTPUT 1

Current

A: 4 – 20 mA DC (Load resistance 600 Ω max.)

D: 0 – 20 mA DC (Load resistance 600 Ω max.)

G: 0 – 1 mA DC (Load resistance 12 kΩ max.)

Voltage

3: 0 – 1 V DC (Load resistance 100 Ω min.)

4: 0 – 10 V DC (Load resistance 1000 Ω min.)

#### [3] OUTPUT 2

0: None

Voltage

6: 1 – 5 V DC (Load resistance 5000 Ω min.)

#### POWER INPUT

DC Power

R: 24 V DC

(Operational voltage range 24 V ±10 %, ripple 10 %p-p max.)

#### [4] OPTIONS

blank: none

/Q: With options (specify the specification)

#### SPECIFICATIONS OF OPTION: Q

COATING (For the detail, refer to our web site.)

/C01: Silicone coating

/C02: Polyurethane coating

/C03: Rubber coating

#### GENERAL SPECIFICATIONS

**Construction:** Rack-mounted; terminal access via screw terminals at the front and via card-edge connector at the rear; terminal cover provided

**Connection**

**Input:** M3.5 screw terminals (torque 0.8 N·m)

**Output:** Card-edge connector and M3.5 screw terminals (torque 0.8 N·m)

**Power input:** Supplied from card-edge connector

**Screw terminal:** Nickel-plated steel

**Housing material:** Flame-resistant resin (black)


**Isolation:** Input to output 1 to output 2 to power

**Overrange output:** Approx. 0 to 120 % at 1 – 5V

**Zero adjustment:** -2 to +2 % (front)

**Span adjustment:** 95 to 105 % (front)

**Low-end cutout:** Approx. 10 % (output); curve characteristics shown in the figure below



## INPUT SPECIFICATIONS

- DC Current: Input resistor incorporated

## OUTPUT SPECIFICATIONS

The output turns to 0 % when the input is open.

## INSTALLATION

**Current consumption:** Approx. 30 mA with voltage output 1

Approx. 55 mA with current output 1

**Operating temperature:** -5 to +55°C (23 to 131°F)

**Operating humidity:** 30 to 90 %RH (non-condensing)

**Mounting:** Standard Rack 10BXx

**Weight:** 200 g (0.44 lb)

## PERFORMANCE in percentage of span

**Accuracy:**  $\pm 0.25$  % (input 1 - 100 %)

**Temp. coefficient:**  $\pm 0.03$  %/°C ( $\pm 0.02$  %/°F)

**Response time:**  $\leq 0.5$  sec. (0 - 90 %)

**Line voltage effect:**  $\pm 0.1$  % over voltage range


**Insulation resistance:**  $\geq 100$  M $\Omega$  with 500 V DC

**Dielectric strength:** 500 V AC @ 1 minute


(input to output 1 to output 2 to power)

1500 V AC @ 1 minute (input or output or power to ground)

## EXTERNAL DIMENSIONS & TERMINAL ASSIGNMENTS unit: mm [inch]

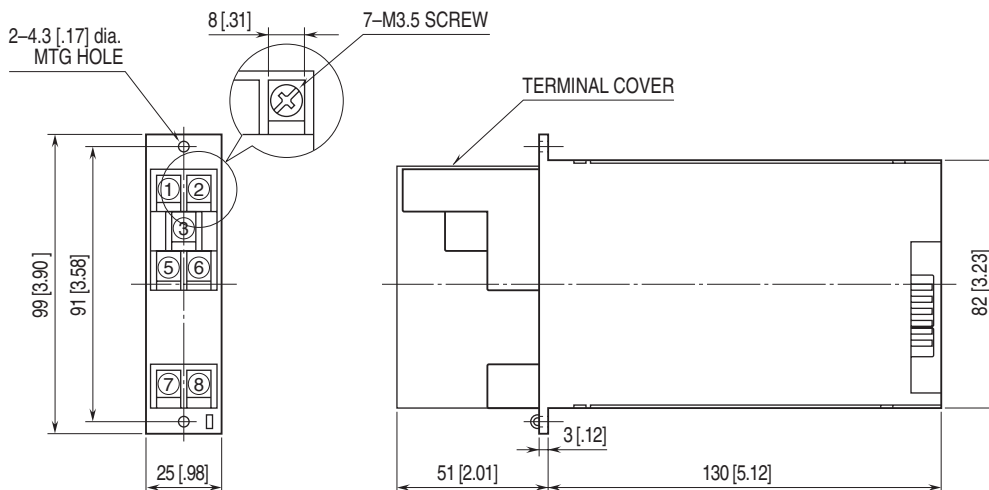

**SCHEMATIC CIRCUITRY & CONNECTION DIAGRAM**

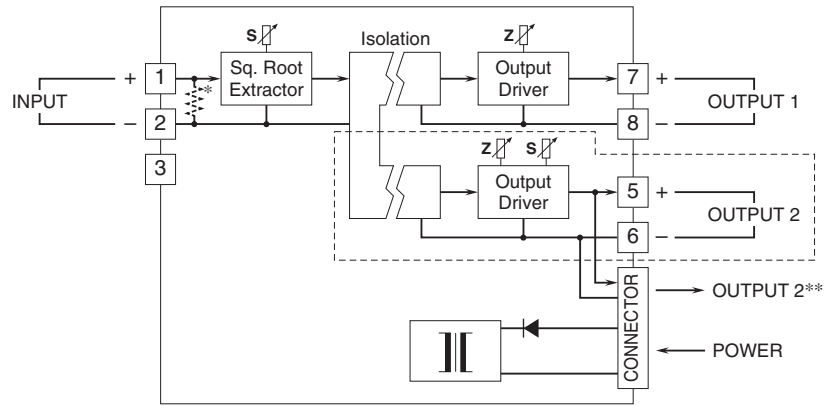

\* Input shunt resistor incorporated for current input.

\*\*1 output type has the output 1 connected to the card-edge connector in parallel.

Remark 1) The section enclosed by broken line is only for 2nd output channel.



Specifications are subject to change without notice.