

## Rack-mounted DCS Signal Conditioners 18-RACK


### DC ALARM

#### Functions & Features

- Providing relay contact closures at preset DC input levels
- Single or dual (Hi/Lo) trip
- Frontaccessed screwdriver setpoint adjustments
- Enclosed relays

#### Typical Applications

- Annunciator
- Various alarm applications



## MODEL: 18AS2-[1][2]-R

### ORDERING INFORMATION

- Code number: 18AS2-[1][2]-R
- Specify a code from below for each of [1] and [2].  
(e.g. 18AS2-62-R)
- Special input range (For code 0)
- Use Ordering Information Sheet (No. ESU-1033) to specify alarm output code 0 specifications.

### [1] INPUT

Current

- A:** 4 - 20 mA DC (Input resistance 250 Ω)
- D:** 0 - 20 mA DC (Input resistance 50 Ω)
- G:** 0 - 1 mA DC (Input resistance 1000 Ω)
- H:** 10 - 50 mA DC (Input resistance 100 Ω)

Voltage

- 3:** 0 - 1 V DC (Input resistance 1 MΩ min.)
- 4:** 0 - 10 V DC (Input resistance 1 MΩ min.)
- 5:** 0 - 5 V DC (Input resistance 1 MΩ min.)
- 6:** 1 - 5 V DC (Input resistance 1 MΩ min.)
- 0:** Specify voltage (See INPUT SPECIFICATIONS)

### [2] ALARM OUTPUT

- 1:** Hi (coil energized at alarm)
- 2:** Hi (coil de-energized at alarm)
- 3:** Lo (coil energized at alarm)
- 4:** Lo (coil de-energized at alarm)
- 5:** Hi/Lo; N.O., OFF in power failure

- (connector output not available)
- 6:** Hi/Lo; N.C., OFF in power failure  
(connector output not available)
- 0:** Specify

### POWER INPUT

DC Power

**R:** 24 V DC

(Operational voltage range 24 V ±10 %, ripple 10 %p-p max.)

### GENERAL SPECIFICATIONS

**Construction:** Rack-mounted; terminal access via screw terminals on the front and connector on the rear; terminal cover provided

**Connection**

**Input:** M3.5 screw terminals (torque 0.8 N·m)

**Alarm output:** M3.5 screw terminals (torque 0.8 N·m) and connector

**Power input:** Supplied from connector

**Screw terminal:** Nickel-plated steel

**Isolation:** Input to output to power

**Relay:** Enclosed

**Setpoint adjustments:** Multi-turn screwdriver adjustments (front); -5 - +105 % independently

**Hysteresis (deadband):** Approx. 1 %

**Front LEDs:** Red LED turns on when the coil is energized.

### INPUT SPECIFICATIONS

■ **DC Current:** Input resistor incorporated

■ **DC Voltage:** 0 - 300 V DC

**Minimum span:** 1 V

**Offset:** Max. 1.5 times span

**Input resistance:** ≥ 1 MΩ

**OUTPUT SPECIFICATIONS**

**Output:** Enclosed SPST and SPDT relays

**Rating:**

30 V DC @ 1 A (resistive load)

0.2 A for the connector output

**Maximum switching voltage:** 30 V DC

**Max. switching power:** 30 W (6 W for the connector output)

**Minimum load:** 5 V DC @ 10m A

**Mechanical life:** 5 × 10<sup>7</sup> cycles

• **Single Alarm**

**Front terminals**

|                             |       |       |
|-----------------------------|-------|-------|
|                             | 5 – 6 | 5 – 7 |
| Energized                   | ON    | OFF   |
| De-energized (or power OFF) | OFF   | ON    |

**Rear connector**

| ALARM<br>OUTPUT<br>CODE | POWER ON |          | POWER OFF |
|-------------------------|----------|----------|-----------|
|                         | IN < SET | IN > SET |           |
| 1                       | OFF      | ON       | OFF       |
| 2                       | OFF      | ON       | ON        |
| 3                       | ON       | OFF      | OFF       |
| 4                       | ON       | OFF      | ON        |

• **Dual Alarm (front terminals)**

| ALARM<br>OUTPUT<br>CODE | POWER ON |       |          |       | POWER OFF |       |
|-------------------------|----------|-------|----------|-------|-----------|-------|
|                         | IN < SET |       | IN > SET |       | 5 – 6     | 7 – 8 |
|                         | 5 – 6    | 7 – 8 | 5 – 6    | 7 – 8 |           |       |
| 5                       | ON       | OFF   | OFF      | ON    | OFF       | OFF   |
| 6                       | OFF      | ON    | ON       | OFF   | OFF       | OFF   |

Shades indicates that the relay is energized.

**INSTALLATION**

**Current consumption:** Approx. 80 mA

**Operating temperature:** -5 to +55°C (23 to 131°F)

**Operating humidity:** 30 to 90 %RH (non-condensing)

**Mounting:** Standard Rack 18BXx or 18KBXx

**Weight:** 150 g (0.33 lb)

**PERFORMANCE in percentage of span**

**Trip point repeatability:** ±0.1 %

**Temp. coefficient:** ±0.015 %/°C (±0.008 %/°F)

**Response time:** ≤ 0.5 sec. (0 - 100 % at 90 % setpoint)

**Line voltage effect:** ±0.1 % over voltage range

**Insulation resistance:** ≥ 100 MΩ with 500 V DC

**Dielectric strength:** 1500 V AC @ 1 minute


(input to output or power)

500 V AC @ 1 minute (output to power)


1500 V AC @ 1 minute (input or output or power to ground)

**EXTERNAL VIEW**


■ SINGLE ALARM

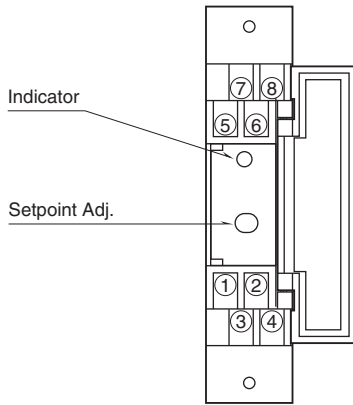


■ DUAL ALARM

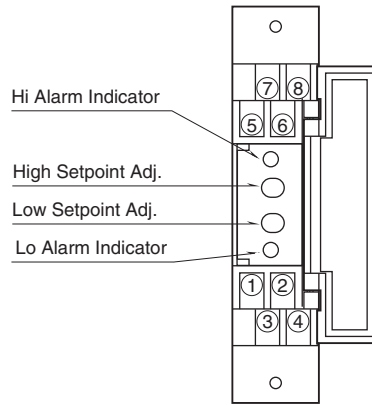

**EXTERNAL DIMENSIONS unit: mm [inch]**

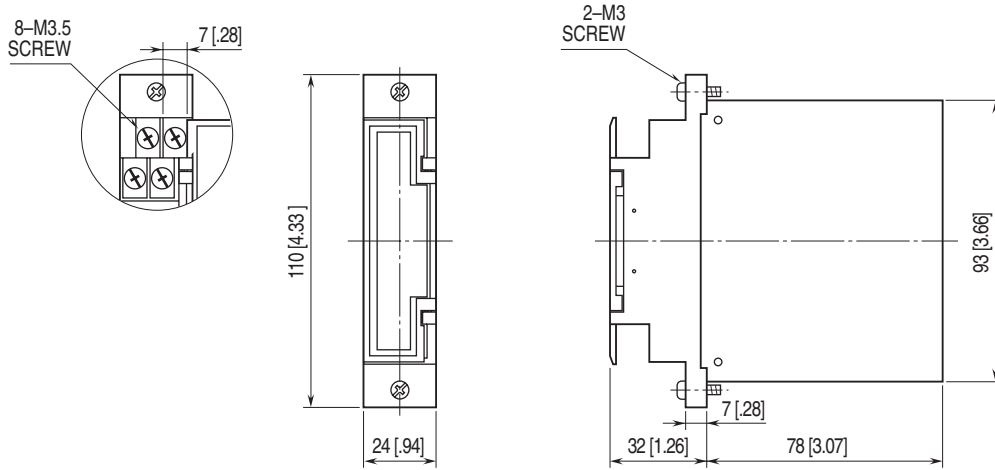


**TERMINAL ASSIGNMENTS**




## SCHEMATIC CIRCUITRY & CONNECTION DIAGRAM

### ■ SINGLE ALARM

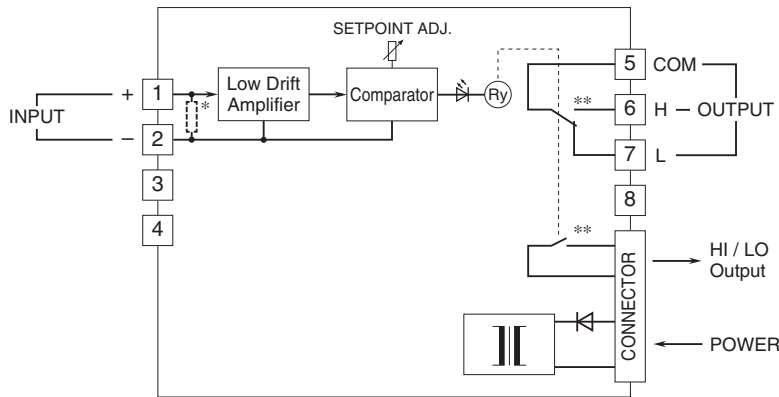


### ■ Relay Protection


#### • AC Powered



#### • DC Powered



### ■ DUAL ALARM

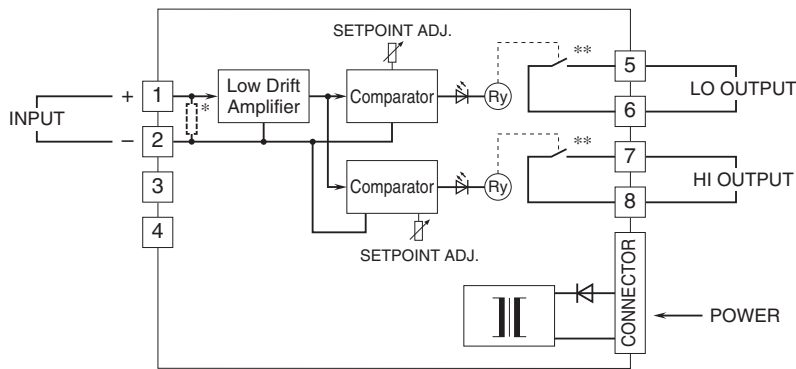

\* Input shunt resistor incorporated for current input.

\*\*Relay status is determined by output codes.



Specifications are subject to change without notice.