

FIBER OPTICS CABLE

(for use with OT2/OR2, OTT2/OTR2)

Functions & Features

- Fiber optics cable assembly for use with the OT2/OR2 and the OTT2/OTR2

MODEL: AMPCP2-[1]

ORDERING INFORMATION

- Code number: AMPCP2-[1]

Specify a code from below for [1].

(e.g. AMPCP2-30M)

[1] CABLE LENGTH

10M: Cable with connectors at both ends, 10 m (32.8 ft.)

20M: Cable with connectors at both ends, 20 m (65.6 ft.)

30M: Cable with connectors at both ends, 30 m (98.4 ft.)

RELATED PRODUCTS

- Optical transmitter (model: OT2)
- Optical receiver (model: OR2)
- Thermocouple transmitter (model: OTT2)
- Thermocouple receiver (model: OTR2)


GENERAL SPECIFICATIONS

Optical cable: Mitsubishi Chemical Super Eska SH 4001

- **Minimum bend radius:** 25 mm
- **Tension strength:** ≤ 70 N

Connector: Broadcom HFBR-4532Z

EXTERNAL DIMENSIONS unit: mm [inch]

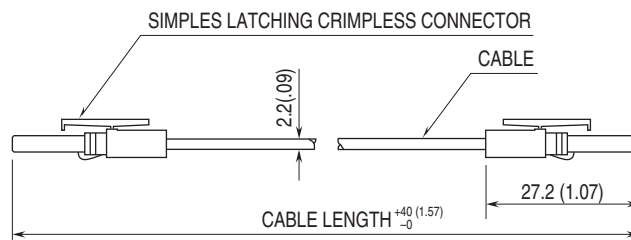

Specifications are subject to change without notice.