

## Space-saving Two-wire Signal Conditioners B-UNIT


### STRAIN GAUGE TRANSMITTER

#### Functions & Features

- Used in conjunction with bridge type strain gauges utilized in load cells, pressure transducers, etc.
- Supplying the required excitation voltage and providing appropriate DC output signal
- Excitation in pulses enables use with strain gauges of the bridge resistance 350 Ω
- Monitor terminals provided
- High-density mounting

#### Typical Applications

- Weighing system for tanks, hoppers, silos
- Weighing system using cranes
- Float level meter utilizing strain gauges



## MODEL: BLC-[1][2]

### ORDERING INFORMATION

- Code number: BLC-[1][2]
- Specify a code from below for each of [1] and [2].  
(e.g. BLC-2/Q)
- Specify the specification for option code /Q  
(e.g. /C01/S01)

### [1] INPUT STRAIN GAUGE

- 2: 2 mV/V
- 0: Specify

### [2] OPTIONS

- blank: none
- /Q: With options (specify the specification)

### SPECIFICATIONS OF OPTION: Q (multiple selections)

#### COATING (For the detail, refer to our web site.)

- /C01: Silicone coating
- /C02: Polyurethane coating

/C03: Rubber coating

#### TERMINAL SCREW MATERIAL

/S01: Stainless steel

### GENERAL SPECIFICATIONS

**Construction:** Plug-in

**Connection:** M3.5 screw terminals (torque 0.8 N·m)

**Screw terminal:** Nickel-plated steel (standard) or stainless steel

**Housing material:** Flame-resistant resin (black)

**Zero adjustment:** 0 - 80 % (front)

**Span adjustment:** 100 - 20 % (front)

### INPUT SPECIFICATIONS

**Input:** Bridge voltage from load cells

**Rated output from strain gauge:** 2 mV/V


**Nominal bridge resistance:** 350 Ω minimum

**Excitation:** 5 V voltage pulse

### OUTPUT SPECIFICATIONS

**Output:** 4 - 20 mA DC

**Load resistance vs. supply voltage:** Load Resistance (Ω) = (Supply Voltage (V) - 13 (V)) ÷ 0.02 (A)  
(including leadwire resistance)

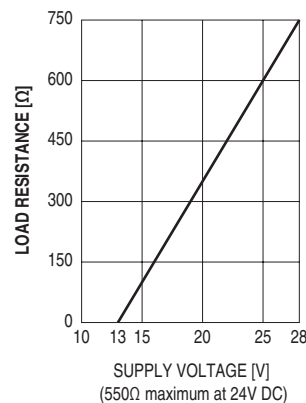

### INSTALLATION

**Supply voltage:** 13 - 28 V DC

**Operating temperature:** -5 to +60°C (23 to 140°F)

**Operating humidity:** 30 to 90 %RH (non-condensing)

**Mounting:** Surface or DIN rail; Standard Rack Mounting

Frame BX-16H available

**Weight:** 150 g (0.33 lb)


### PERFORMANCE in percentage of span

**Accuracy:** ±0.2 %

**Temp. coefficient:** ±0.02 %/°C (±0.01 %/°F)


**Response time:** ≤ 0.5 sec. (0 - 90 %)

**EXTERNAL DIMENSIONS & TERMINAL ASSIGNMENTS** unit: mm [inch]

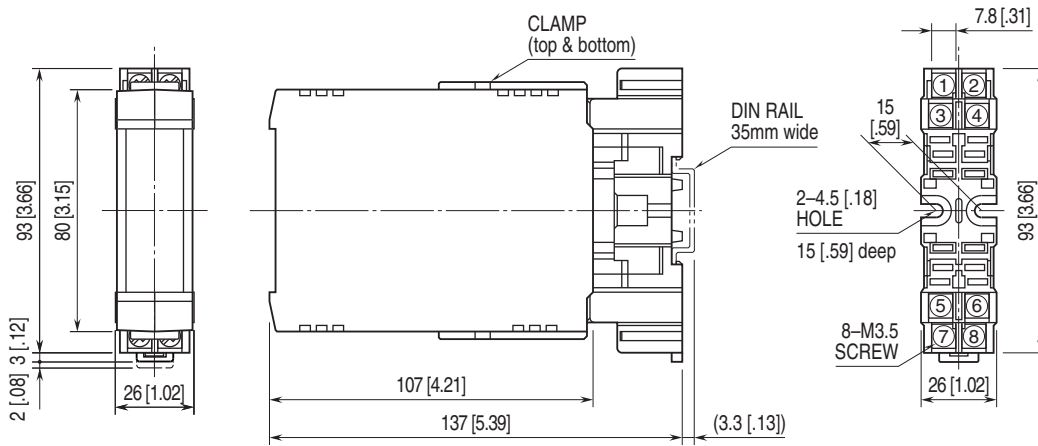

•When mounting, no extra space is needed between units.

**SCHEMATIC CIRCUITRY & CONNECTION DIAGRAM**

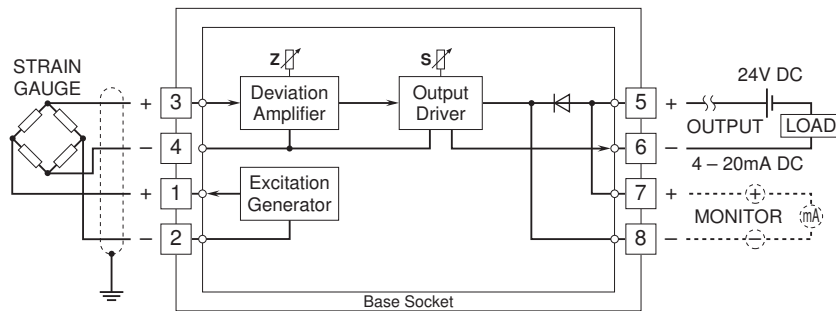

Specifications are subject to change without notice.