


Space-saving Two-wire Signal Conditioners B-UNIT

THERMOCOUPLE TRANSMITTER

(non-isolated)

Functions & Features

- Accepting direct input from a thermocouple and providing a standard 4 – 20 mA DC signal
- Burnout protection
- High-accuracy cold junction compensation
- High-density mounting



MODEL: BT-[1][2]

ORDERING INFORMATION

- Code number: BT-[1][2]

Specify a code from below for each of [1] and [2].

- (e.g. BT-2/BL/Q)
- Temperature range (e.g. 0 – 800°C)
- Specify the specification for option code /Q (e.g. /C01/S01)

[1] INPUT THERMOCOUPLE

- 2: K (CA) (Usable range -270 to +1370°C, -454 to +2498°F)
- 3: E (CRC) (Usable range -270 to +1000°C, -454 to +1832°F)
- 4: J (IC) (Usable range -210 to +1200°C, -346 to +2192°F)
- 5: T (CC) (Usable range -270 to +400°C, -454 to +752°F)
- 7: R (Usable range -50 to +1760°C, -58 to +3200°F)
- 8: S (Usable range -50 to +1760°C, -58 to +3200°F)

[2] OPTIONS (multiple selections)

Burnout

- blank: Upscale burnout
- /BL: Downscale burnout
- /BN: No burnout

Other Options

- blank: none
- /Q: Option other than the above (specify the specification)

SPECIFICATIONS OF OPTION: Q (multiple selections)

COATING (For the detail, refer to our web site.)

- /C01: Silicone coating
- /C02: Polyurethane coating
- /C03: Rubber coating

TERMINAL SCREW MATERIAL

- /S01: Stainless steel

GENERAL SPECIFICATIONS

Construction: Plug-in

Connection: M3.5 screw terminals (torque 0.8 N·m)

Screw terminal: Nickel-plated steel (standard) or stainless steel

Housing material: Flame-resistant resin (black)

Zero adjustment: -5 to +5 % (front)

Span adjustment: 95 to 105 % (front)

Linearization: Not provided

Cold junction compensation: CJC sensor attached to the input terminals

INPUT SPECIFICATIONS

Minimum span: 3 mV

Offset: Max. 1.5 times span

Input resistance: 50 kΩ minimum

Burnout sensing: 0.25 μA

Minimum span (in °C)

K (CA): 75°C

E (CRC): 50°C

J (IC): 60°C

T (CC): 75°C

R: 360°C

S: 380°C

Minimum span (in °F)

K (CA): 140°F

E (CRC): 90°F

J (IC): 110°F

T (CC): 140°F

R: 650°F

S: 690°F


OUTPUT SPECIFICATIONS

Output: 4 – 20 mA DC

Load resistance vs. supply voltage:

Load Resistance (Ω) = (Supply Voltage (V) – 12 (V))

÷ 0.02 (A) (including leadwire resistance)

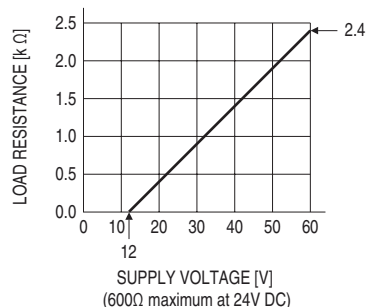

INSTALLATION

Supply voltage: 12 – 60 V DC

Operating temperature: -5 to +60°C (23 to 140°F)

Operating humidity: 30 to 90 %RH (non-condensing)

Mounting: Surface or DIN rail; Standard Rack Mounting

Frame BX-16H available

Weight: 150 g (0.33 lb)

PERFORMANCE in percentage of span

Accuracy: ±0.1 % (at over 400°C or 750°F for R and S)

Cold junction compensation error (at 20°C or 68°F)

K, E, J & T: ±0.5°C or ±0.9°F

S & R: ±1°C or ±1.8°F


Temp. coefficient: ±0.05 %/°C (±0.03 %/°F)

(at over 400°C or 750°F for R and S)



Response time: ≤ 0.5 sec. (0 – 90 %)

Burnout response: ≤ 10 sec.

EXTERNAL DIMENSIONS unit: mm [inch]

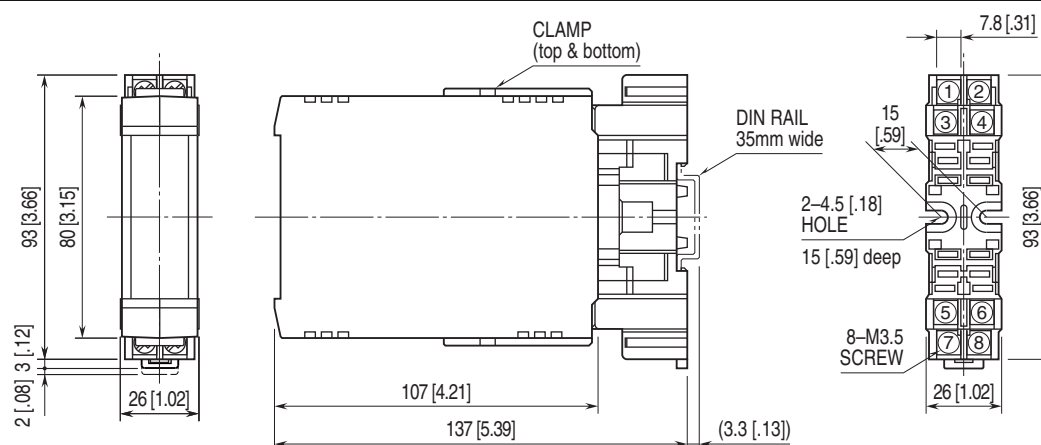

•When mounting, no extra space is needed between units.

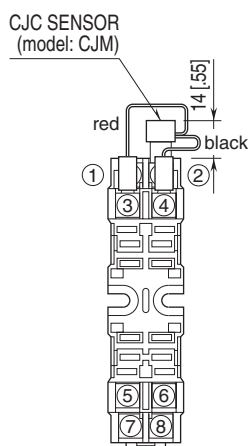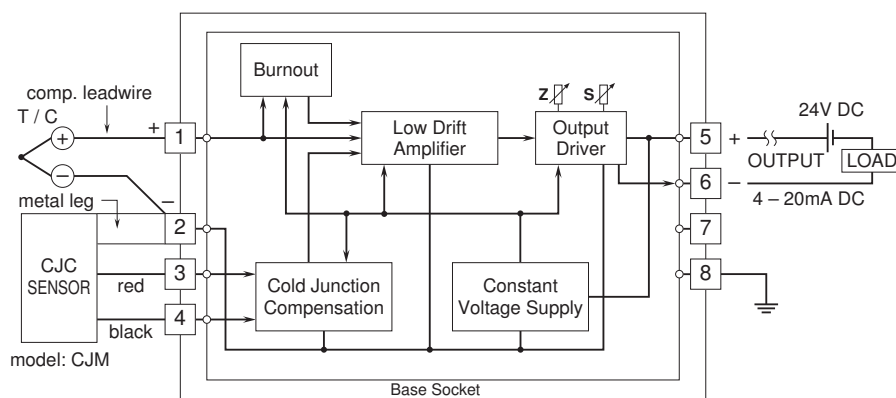TERMINAL ASSIGNMENTS unit: mm [inch]**SCHEMATIC CIRCUITRY & CONNECTION DIAGRAM**

Specifications are subject to change without notice.