

Plug-in Signal Conditioners K-UNIT

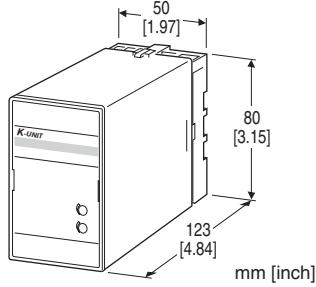
LINEARIZER

Functions & Features

- Accepting non-linear input and providing a linearized output, proportional to the process variables
- Up to 100 calibration points
- Off-site (factory) calibration
- Isolation up to 2000 V AC
- Highdensity mounting

Typical Applications

- V-notch weir
- Gas analyzer
- Irregular-shaped tank level input for volume calculation



MODEL: KX-[1][2]-[3][4]

ORDERING INFORMATION

- Code number: KX-[1][2]-[3][4]

Specify a code from below for each of [1] through [4].

(e.g. KX-6A-B/Q)

- Linearization data
- Special input and output ranges (For codes Z & 0)
- Specify the specification for option code /Q
(e.g. /C01/S01)

Use Ordering Information Sheet (No. ESU-1621) to specify linearization data when the I/O signals are non-linear.

[1] INPUT

Current

A: 4 - 20 mA DC (Input resistance 250 Ω)

A1: 4 - 20 mA DC (Input resistance 50 Ω)

B: 2 - 10 mA DC (Input resistance 500 Ω)

C: 1 - 5 mA DC (Input resistance 1000 Ω)

D: 0 - 20 mA DC (Input resistance 50 Ω)

E: 0 - 16 mA DC (Input resistance 62.5 Ω)

F: 0 - 10 mA DC (Input resistance 100 Ω)

G: 0 - 1 mA DC (Input resistance 1000 Ω)

H: 10 - 50 mA DC (Input resistance 100 Ω)

- J:** 0 - 10 μA DC (Input resistance 1000 Ω)
- K:** 0 - 100 μA DC (Input resistance 1000 Ω)
- GW:** -1 - +1 mA DC (Input resistance 1000 Ω)
- FW:** -10 - +10 mA DC (Input resistance 100 Ω)
- Z:** Specify current (See INPUT SPECIFICATIONS)
- Voltage**
- 1:** 0 - 10 mV DC (Input resistance 10 kΩ min.)
- 15:** 0 - 50 mV DC (Input resistance 10 kΩ min.)
- 16:** 0 - 60 mV DC (Input resistance 10 kΩ min.)
- 2:** 0 - 100 mV DC (Input resistance 100 kΩ min.)
- 3:** 0 - 1 V DC (Input resistance 1 MΩ min.)
- 4:** 0 - 10 V DC (Input resistance 1 MΩ min.)
- 5:** 0 - 5 V DC (Input resistance 1 MΩ min.)
- 6:** 1 - 5 V DC (Input resistance 1 MΩ min.)
- 4W:** -10 - +10 V DC (Input resistance 1 MΩ min.)
- 5W:** -5 - +5 V DC (Input resistance 1 MΩ min.)
- 0:** Specify voltage (See INPUT SPECIFICATIONS)

[2] OUTPUT

Current

A: 4 - 20 mA DC (Load resistance 750 Ω max.)

B: 2 - 10 mA DC (Load resistance 1500 Ω max.)

C: 1 - 5 mA DC (Load resistance 3000 Ω max.)

D: 0 - 20 mA DC (Load resistance 750 Ω max.)

E: 0 - 16 mA DC (Load resistance 900 Ω max.)

F: 0 - 10 mA DC (Load resistance 1500 Ω max.)

G: 0 - 1 mA DC (Load resistance 15 kΩ max.)

Z: Specify current (See OUTPUT SPECIFICATIONS)

Voltage

1: 0 - 10 mV DC (Load resistance 10 kΩ min.)

2: 0 - 100 mV DC (Load resistance 100 kΩ min.)

3: 0 - 1 V DC (Load resistance 1000 Ω min.)

4: 0 - 10 V DC (Load resistance 10 kΩ min.)

5: 0 - 5 V DC (Load resistance 5000 Ω min.)

6: 1 - 5 V DC (Load resistance 5000 Ω min.)

4W: -10 - +10 V DC (Load resistance 10 kΩ min.)

5W: -5 - +5 V DC (Load resistance 5000 Ω min.)

0: Specify voltage (See OUTPUT SPECIFICATIONS)

[3] POWER INPUT

AC Power

B: 100 V AC

C: 110 V AC

D: 115 V AC

F: 120 V AC

G: 200 V AC

H: 220 V AC

J: 240 V AC

DC Power

S: 12 V DC

R: 24 V DC

[4] OPTIONS**blank:** none**/Q:** With options (specify the specification)**SPECIFICATIONS OF OPTION: Q (multiple selections)**

COATING (For the detail, refer to our web site.)

/C01: Silicone coating**/C02:** Polyurethane coating**/C03:** Rubber coating

TERMINAL SCREW MATERIAL

/S01: Stainless steel**Load resistance:** Output drive 1 mA max.; at $\geq 0.5\text{ V}$ **INSTALLATION****Power input****•AC:** Operational voltage range: rating $\pm 10\%$,
 $50/60 \pm 2\text{ Hz}$, approx. 3 VA**•DC:** Operational voltage range: rating $\pm 10\%$,
ripple 10 %p-p max., approx. 2 W (90 mA at 24 V)**Operating temperature:** -5 to +55°C (23 to 131°F)**Operating humidity:** 30 to 90 %RH (non-condensing)**Mounting:** Surface or DIN rail**Weight:** 350 g (0.77 lb)**GENERAL SPECIFICATIONS****Construction:** Plug-in**Connection:** M3.5 screw terminals**Screw terminal:** Chromated steel (standard) or stainless steel**Housing material:** Flame-resistant resin (black)**Isolation:** Input to output to power**Zero adjustment:** -5 to +5 % (front)**Span adjustment:** 95 to 105 % (front)**Linearization:** 100 points max. within the range of

-15.00 to +115.00 % input or output;

Or the following equations are standard.

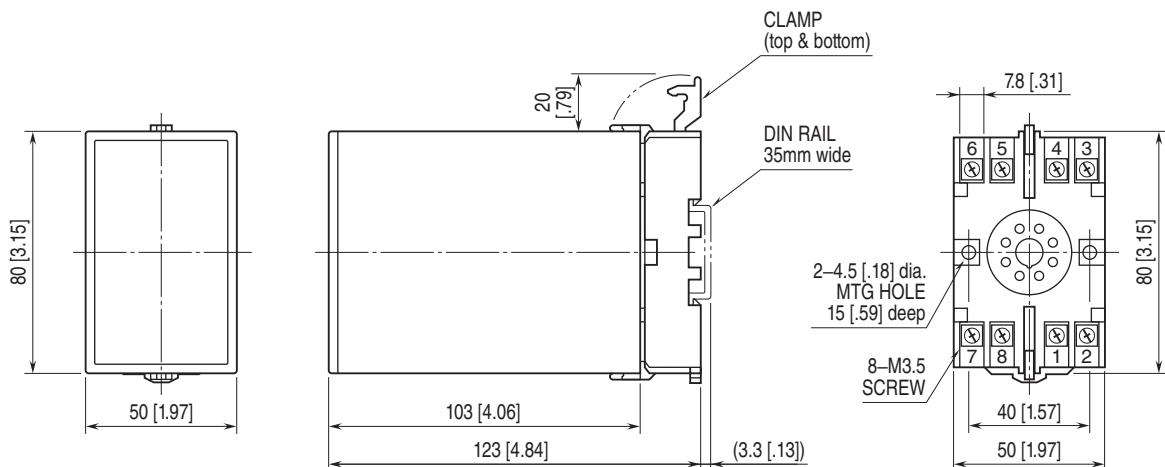
- Square root extraction (orifice, venturi)
- X^2 (Palmer-Bowlus flume, Parshall flume)
- $X^{5/2}$ (triangular or v-notch weir)
- $X^{3/2}$ (rectangular weir)

PERFORMANCE in percentage of span**Accuracy:** $\pm 0.1\%$ with segment gain ≤ 3 [$\pm 0.1\% \times \text{gain}$] with segment gain > 3 **Temp. coefficient:** $\pm 0.02\%/\text{°C}$ ($\pm 0.01\%/\text{°F}$)**Response time:** $\leq 0.5\text{ sec.}$ (0 - 90 %)**Line voltage effect:** $\pm 0.1\%$ over voltage range**Insulation resistance:** $\geq 100\text{ M}\Omega$ with 500 V DC**Dielectric strength:** 2000 V AC @1 minute (input to output to power to ground)**INPUT SPECIFICATIONS****■ DC Current:**

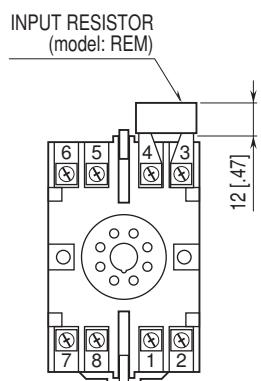
Shunt resistor attached to the input terminals (0.5 W)

Specify input resistance value for code Z.

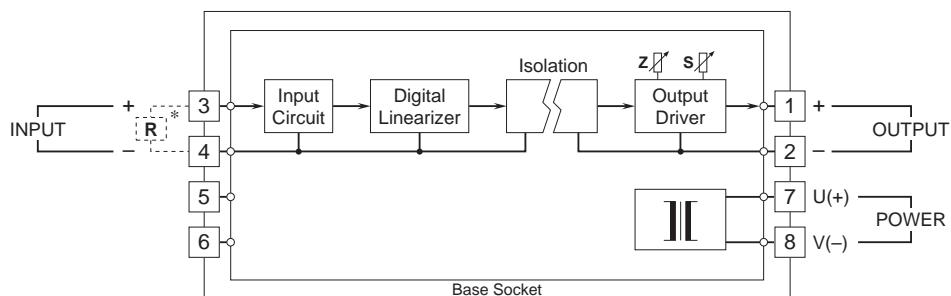
■ DC Voltage: -300 - +300 V DC**Minimum span:** 3 mV**Offset:** Max. 1.5 times span**Input resistance**Span 3 - 10 mV : $\geq 10\text{ k}\Omega$ Span 10 - 100 mV : $\geq 10\text{ k}\Omega$ Span 0.1 - 1 V : $\geq 100\text{ k}\Omega$ Span $\geq 1\text{ V}$: $\geq 1\text{ M}\Omega$ **OUTPUT SPECIFICATIONS****■ DC Current:** 0 - 20 mA DC**Minimum span:** 1 mA**Offset:** Max. 1.5 times span**Load resistance:** Output drive 15 V max.**■ DC Voltage:** -10 - +20 V DC**Span:** Min. 5 mV, max. 20 V**Offset:** Max. 1.5 times span

EXTERNAL DIMENSIONS unit: mm [inch]

- When mounting, no extra space is needed between units.

TERMINAL ASSIGNMENTS unit: mm [inch]

Input shunt resistor attached
for current input.

SCHEMATIC CIRCUITRY & CONNECTION DIAGRAM

*Input shunt resistor attached for current input.



Specifications are subject to change without notice.