

## Plug-in Signal Conditioners M-UNIT

### LIMITER


(isolated)

#### Functions & Features

- Preventing DC output signals from going above or below preset values
- High and low limits independently adjustable over entire range
- Monitor jacks provided for setpoint adjustments
- Isolation up to 2000 V AC
- High-density mounting

#### Typical Applications

- Securing the minimum fuel flow in a combustion control loop



## MODEL: LMS-[1][2]-[3][4]

### ORDERING INFORMATION

- Code number: LMS-[1][2]-[3][4]
- Specify a code from below for each of [1] through [4]. (e.g. LMS-6A-B/Q)
- Special input and output ranges (For codes Z & 0)
- Specify the specification for option code /Q (e.g. /C01/S01)

### [1] INPUT

Current

- A: 4 - 20 mA DC (Input resistance 250  $\Omega$ )
- A1: 4 - 20 mA DC (Input resistance 50  $\Omega$ )
- B: 2 - 10 mA DC (Input resistance 500  $\Omega$ )
- C: 1 - 5 mA DC (Input resistance 1000  $\Omega$ )
- D: 0 - 20 mA DC (Input resistance 50  $\Omega$ )
- E: 0 - 16 mA DC (Input resistance 62.5  $\Omega$ )
- F: 0 - 10 mA DC (Input resistance 100  $\Omega$ )
- G: 0 - 1 mA DC (Input resistance 1000  $\Omega$ )
- H: 10 - 50 mA DC (Input resistance 100  $\Omega$ )
- J: 0 - 10  $\mu$ A DC (Input resistance 1000  $\Omega$ )
- K: 0 - 100  $\mu$ A DC (Input resistance 1000  $\Omega$ )

- GW: -1 - +1 mA DC (Input resistance 1000  $\Omega$ )
  - FW: -10 - +10 mA DC (Input resistance 100  $\Omega$ )
  - Z: Specify current (See INPUT SPECIFICATIONS)
- Voltage
- 1: 0 - 10 mV DC (Input resistance 10 k $\Omega$  min.)
  - 15: 0 - 50 mV DC (Input resistance 10 k $\Omega$  min.)
  - 16: 0 - 60 mV DC (Input resistance 10 k $\Omega$  min.)
  - 2: 0 - 100 mV DC (Input resistance 100 k $\Omega$  min.)
  - 3: 0 - 1 V DC (Input resistance 1 M $\Omega$  min.)
  - 4: 0 - 10 V DC (Input resistance 1 M $\Omega$  min.)
  - 5: 0 - 5 V DC (Input resistance 1 M $\Omega$  min.)
  - 6: 1 - 5 V DC (Input resistance 1 M $\Omega$  min.)
  - 4W: -10 - +10 V DC (Input resistance 1 M $\Omega$  min.)
  - 5W: -5 - +5 V DC (Input resistance 1 M $\Omega$  min.)
  - 0: Specify voltage (See INPUT SPECIFICATIONS)

### [2] OUTPUT

Current

- A: 4 - 20 mA DC (Load resistance 750  $\Omega$  max.)
  - B: 2 - 10 mA DC (Load resistance 1500  $\Omega$  max.)
  - C: 1 - 5 mA DC (Load resistance 3000  $\Omega$  max.)
  - D: 0 - 20 mA DC (Load resistance 750  $\Omega$  max.)
  - E: 0 - 16 mA DC (Load resistance 900  $\Omega$  max.)
  - F: 0 - 10 mA DC (Load resistance 1500  $\Omega$  max.)
  - G: 0 - 1 mA DC (Load resistance 15 k $\Omega$  max.)
  - Z: Specify current (See OUTPUT SPECIFICATIONS)
- Voltage
- 1: 0 - 10 mV DC (Load resistance 10 k $\Omega$  min.)
  - 2: 0 - 100 mV DC (Load resistance 100 k $\Omega$  min.)
  - 3: 0 - 1 V DC (Load resistance 100  $\Omega$  min.)
  - 4: 0 - 10 V DC (Load resistance 1000  $\Omega$  min.)
  - 5: 0 - 5 V DC (Load resistance 500  $\Omega$  min.)
  - 6: 1 - 5 V DC (Load resistance 500  $\Omega$  min.)
  - 4W: -10 - +10 V DC (Load resistance 2000  $\Omega$  min.)
  - 5W: -5 - +5 V DC (Load resistance 1000  $\Omega$  min.)
  - 0: Specify voltage (See OUTPUT SPECIFICATIONS)

### [3] POWER INPUT

AC Power

- B: 100 V AC
  - C: 110 V AC
  - D: 115 V AC
  - F: 120 V AC
  - G: 200 V AC
  - H: 220 V AC
  - J: 240 V AC
- DC Power
- S: 12 V DC
  - R: 24 V DC
  - V: 48 V DC
  - P: 110 V DC

**[4] OPTIONS**

**blank:** none

**/Q:** With options (specify the specification)

**SPECIFICATIONS OF OPTION: Q (multiple selections)**

COATING (For the detail, refer to our web site.)

**/C01:** Silicone coating

**/C02:** Polyurethane coating

**/C03:** Rubber coating

TERMINAL SCREW MATERIAL

**/S01:** Stainless steel

**GENERAL SPECIFICATIONS**

**Construction:** Plug-in

**Connection:** M3.5 screw terminals

**Screw terminal:** Chromated steel (standard) or stainless steel

**Housing material:** Flame-resistant resin (black)

**Isolation:** Input to output to power

**Overrange output:** Approx. -5 to +105 % at 1 - 5 V

**Zero adjustment:** -5 to +5 % (front)

**Span adjustment:** 95 to 105 % (front)

**Limit adjustments:** Multi-turn screwdriver adjustments (front); 0 - 100 %; factory set to 0 % for low, 100 % for high

**Monitor output:** 0 - 10 V for 0 - 100 % limit

**Monitor jacks:** 2 mm (.08") dia.

**INPUT SPECIFICATIONS****■ DC Current:**

Shunt resistor attached to the input terminals (0.5 W)

Specify input resistance value for code Z.

**■ DC Voltage:** -300 - +300 V DC

**Minimum span:** 3 mV

**Offset:** Max. 1.5 times span

**Input resistance**

Span 3 - 10 mV :  $\geq 10 \text{ k}\Omega$

Span 10 - 100 mV :  $\geq 10 \text{ k}\Omega$

Span 0.1 - 1 V :  $\geq 100 \text{ k}\Omega$

Span  $\geq 1 \text{ V}$  :  $\geq 1 \text{ M}\Omega$

**OUTPUT SPECIFICATIONS****■ DC Current:** 0 - 20 mA DC

**Minimum span:** 1 mA

**Offset:** Max. 1.5 times span

**Load resistance:** Output drive 15 V max.

**■ DC Voltage:** -10 - +12 V DC

**Minimum span:** 5 mV

**Offset:** Max. 1.5 times span

**Load resistance:** Output drive 10 mA max.; 5 mA for negative voltage output; at  $\geq 0.5 \text{ V}$

**INSTALLATION****Power input**

• **AC:** Operational voltage range: rating  $\pm 10 \%$ , 50/60  $\pm 2 \text{ Hz}$ , approx. 2 VA

• **DC:** Operational voltage range: rating  $\pm 10 \%$ , or 85 - 150 V for 110 V rating (ripple 10 % p-p max.) approx. 2 W (90 mA at 24 V)

**Operating temperature:** -5 to +60°C (23 to 140°F)

**Operating humidity:** 30 to 90 %RH (non-condensing)

**Mounting:** Surface or DIN rail

**Weight:** 300 g (0.66 lb)

**PERFORMANCE in percentage of span**

**Accuracy:**  $\pm 0.1 \%$

**Limit monitor accuracy:**  $\pm 0.25 \%$

**Temp. coefficient:**  $\pm 0.015 \%/^{\circ}\text{C}$  ( $\pm 0.008 \%/^{\circ}\text{F}$ )


**Response time:**  $\leq 0.5 \text{ sec.}$  (0 - 90 %)

**Line voltage effect:**  $\pm 0.1 \%$  over voltage range


**Insulation resistance:**  $\geq 100 \text{ M}\Omega$  with 500 V DC

**Dielectric strength:** 2000 V AC @1 minute (input to output to power to ground)

## EXTERNAL VIEW

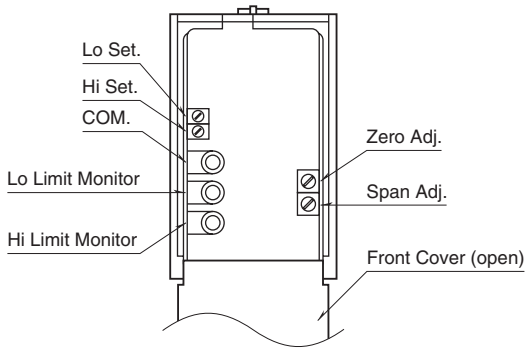


## EXTERNAL DIMENSIONS unit: mm [inch]

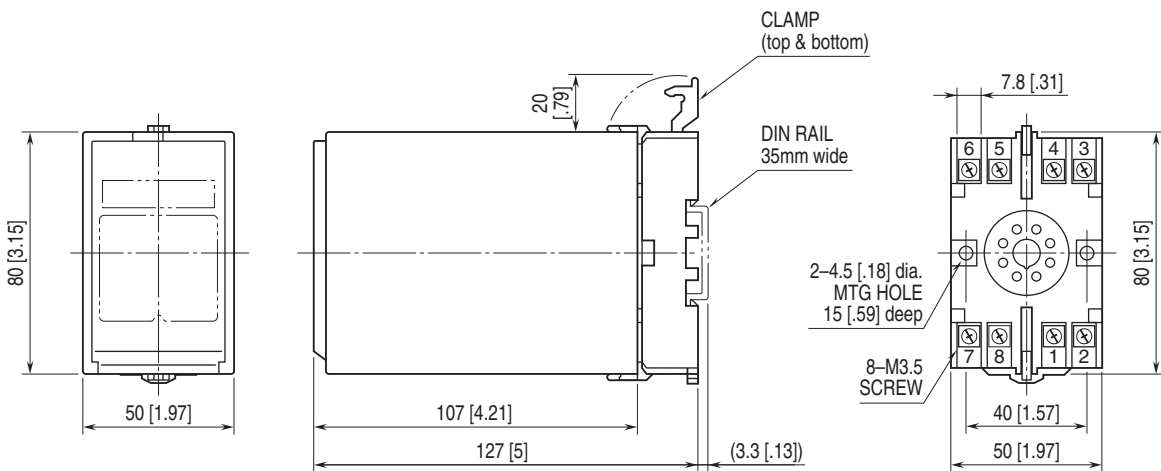


• When mounting, no extra space is needed between units.

## TERMINAL ASSIGNMENTS unit: mm [inch]

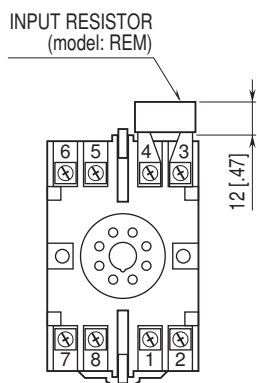

Input shunt resistor attached for current input.

**SCHEMATIC CIRCUITRY & CONNECTION DIAGRAM**

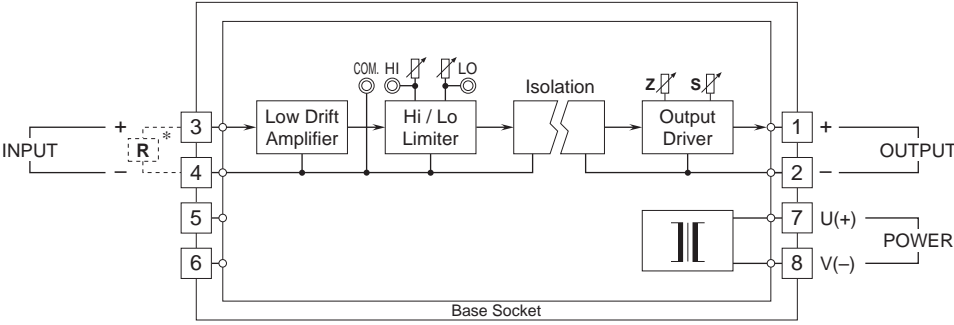

\*Input shunt resistor attached for current input.



Specifications are subject to change without notice.