
Lightning Surge Protectors for Electronics Equipment M-RESTER

LIGHTNING SURGE PROTECTOR FOR SIGNAL LINE WITH EXITATION USE

Functions & Features

• Designed specifically for level sensors, pressure sensors and their converters/transmitters

- Excitation up to 30 V DC
- Voltage signals up to 10 V DC
- Absorbing surges only without affecting instrumentation signal
- Shallow depth
- DIN rail mounting



MODEL: MDK-LV

ORDERING INFORMATION

Code number: MDK-LV

GENERAL SPECIFICATIONS

Construction: Discrete box, front terminals; terminal cover provided

Connection: M3.5 screw terminals (torque 0.8 N·m) **Screw terminal**: Nickel-plated steel **Housing material**: Flame-resistant resin (black)

INSTALLATION

Operating temperature: -5 to +55°C (23 to 131°F) Operating humidity: 30 to 90 %RH (non-condensing) Mounting: DIN rail Weight: 150 g (0.33 lb)


PERFORMANCE

Discharge voltage (peak voltage) Excitation side: 30 V min. Signal side: 10 V min. Line to ground: ±290 V min. Maximum surge voltage


Excitation side: 40 V max. Signal side: 20 V max. Line to around: ±650 V max. (The maximum voltage that could pass through M-RESTER. Protected equipment must be able to withstand this voltage for very short time period.) **Response time**: $\leq 0.1 \ \mu sec$. Leakage current **Excitation side**: \leq 10 µA at 30 V DC Signal side: \leq 10 µA at 10 V DC Line to ground: \leq 10 µA at ±290 V DC Discharge current capacity: 5000 A (8 / 20 µsec.) Max. load current: 100 mA Internal series resistance: $10\Omega \pm 5\%$ Maximum line voltage Excitation side: 30 V Signal side: 10 V

MODEL: MDK-LV

CONNECTION EXAMPLES

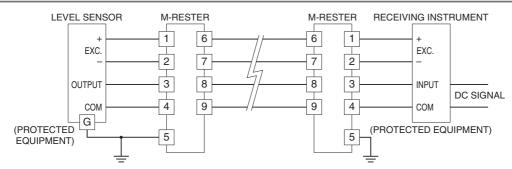


GROUNDING



A crossover wire between M-RESTER ground and ground or metallic housing of equipment is required for protection. If the protected equipment has no ground terminal, ground the


M-RESTER only.

DIMENSIONS unit: mm (inch)

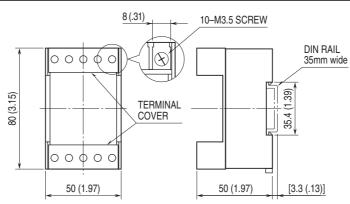

•When mounting, no extra space is needed between units.

TERMINAL ASSIGNMENTS



SCHEMATIC CIRCUITRY

