


## Lightning Surge Protectors for Electronics Equipment M-RESTER

### LIGHTNING SURGE PROTECTOR FOR RTD USE

#### Functions & Features

- Designed specifically for resistance temperature detector (RTD) circuits
- Protecting RTD and RTD transmitters from damage caused by surges on the RTD wiring
- Absorbs surges only without affecting instrumentation signal
- No interruption of signal by unplugging the protector element

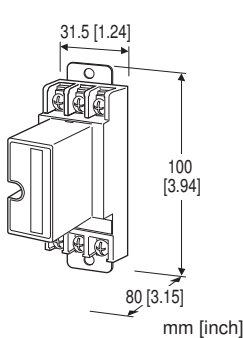

### MODEL: MDP-RB[1]

#### ORDERING INFORMATION

- Code number: MDP-RB[1]  
Specify a code from below for [1].  
(e.g. MDP-RB/A33/Q)
- Specify the specification for option code /Q  
(e.g. /C01)

#### [1] OPTIONS (multiple selections)

##### DIN Rail Mounting Adapter

blank: Without

/A33: With adapter (model A-33)

##### Other Options

blank: none

/Q: Option other than the above (specify the specification)

#### SPECIFICATIONS OF OPTION: Q

##### COATING (For the detail, refer to our web site.)

/C01: Silicone coating

/C02: Polyurethane coating

/C03: Rubber coating

#### GENERAL SPECIFICATIONS

Construction: Plug-in

Connection: M4 screw terminals (torque 0.8 N·m)

Screw terminal: Nickel-plated steel

Housing material: Flame-resistant resin (black)

#### INSTALLATION

Operating temperature: -5 to +55°C (23 to 131°F)

Operating humidity: 30 to 90 %RH (non-condensing)

Mounting: Surface or DIN rail

Weight: 140 g (0.31 lb), standard

165 g (0.36 lb), with DIN rail mounting adapter

#### PERFORMANCE

##### Max. continuous operating voltage (Uc):

B to C:  $\pm 6$  V

B or C to A:  $\pm 3$  V

Line to earth:  $\pm 140$  V

##### Voltage protection level (Up):

• @ 1 kV (100 A)

2 to 3:  $\pm 32$  V

2 or 3 to 1:  $\pm 16$  V

Line to earth:  $\pm 650$  V

• @ 2 kV (1 kA)

2 to 3:  $\pm 40$  V

2 or 3 to 1:  $\pm 25$  V

Line to earth:  $\pm 800$  V

Response time:  $\leq 0.1$   $\mu$ sec.

##### Leakage current:

B to C:  $\leq 2$   $\mu$ A @  $\pm 6$  V DC

B or C to A:  $\leq 2$   $\mu$ A @  $\pm 3$  V DC

Line to earth:  $\leq 2$   $\mu$ A @  $\pm 140$  V DC

Max. discharge current (Imax): 5000 A (8 / 20  $\mu$ s)

Nominal current (In): 100 mA

Internal series resistance: 10  $\Omega$   $\pm 0.1$  %, 30 ppm/°C (17 ppm/°F)

##### Capacitance @ 1 MHz:

Line to line:  $\leq 1000$  pF

Line to earth:  $\leq 100$  pF

Surge protection: IEC 61643-21 Categories C1, C2, D1

#### STANDARDS & APPROVALS

##### EU conformity:


EMC Directive

EMI EN 61000-6-4


EMS EN 61000-6-2

RoHS Directive

## CONNECTION EXAMPLES

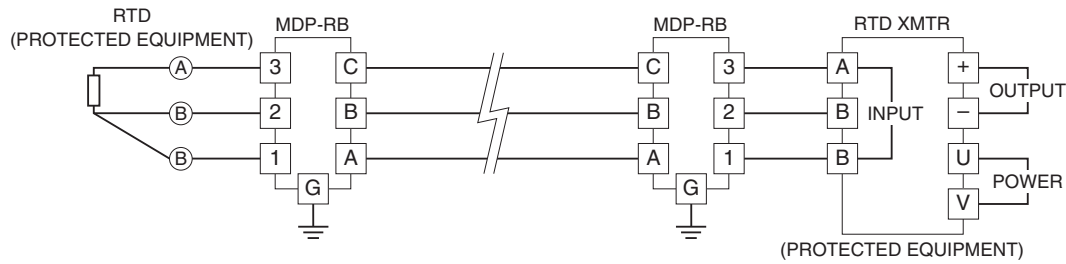


## GROUNDING

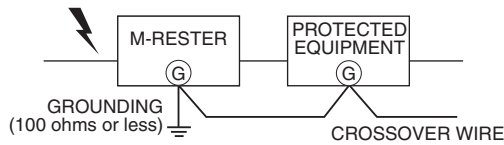


A crossover wire between M-RESTER ground and the ground or metallic housing of the equipment is required for protection.  
If the protected equipment has no ground terminal, ground the M-RESTER only.  
When the M-RESTER is mounted with DIN Rail Mounting Adapter, connect the grounding wire to the mounting screw of the M-RESTER.

## EXTERNAL DIMENSIONS & TERMINAL ASSIGNMENTS unit: mm [inch]


### ■ STANDARD

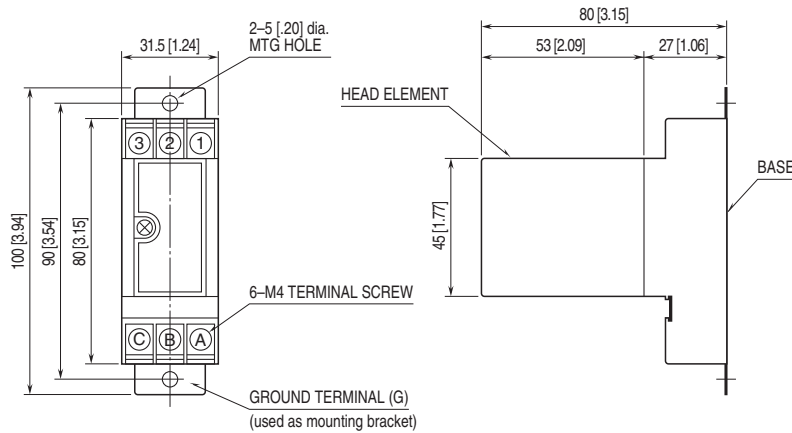


### ■ WITH DIN RAIL MOUNTING ADAPTER

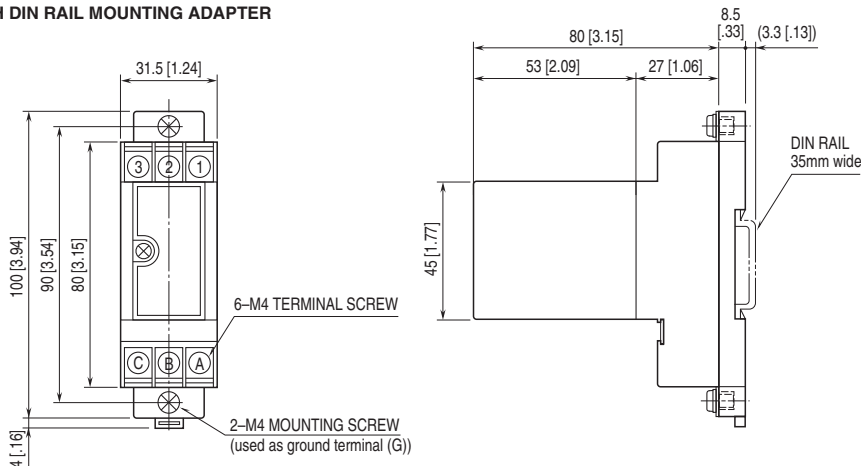

## MOUNTING REQUIREMENTS unit: mm [inch]

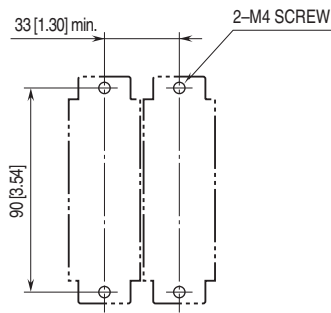

## SCHEMATIC CIRCUITRY & CONNECTION DIAGRAM

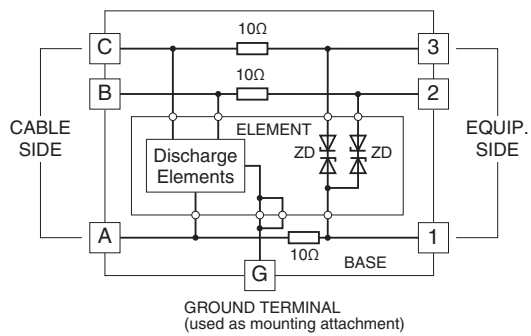

Specifications are subject to change without notice.