

## CT PROTECTOR

### Functions & Features

- Attached to the base socket of M-UNIT, H-UNIT and other plug-in type CT transmitters in order to protect the primary current transformer from burning when the transmitter unit is unplugged (openloop)

## MODEL: CTM-5

### ORDERING INFORMATION

- Code number: CTM-5

### RATING

Current

5: 5 A

### SPECIFICATIONS

Rating: 5 A

Rated over-range current: 50 A for 3 seconds, 10 A for 10 seconds;

Do not allow longer time as CTM-5 is a protector with a diode.


### INSTALLATION

Operating temperature: -10 to +60°C (14 to 140°F)

Operating humidity: 30 to 90 %RH (non-condensing)

Weight: Approx. 10 g (0.35 oz)

### DIMENSIONS unit: mm (inch)

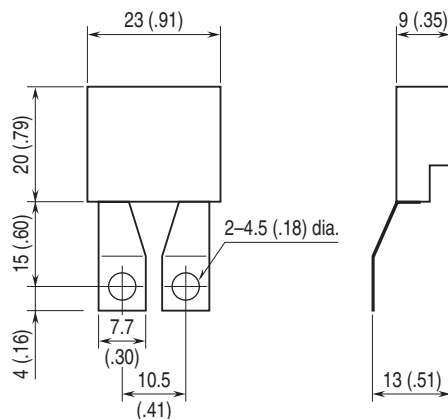

Specifications are subject to change without notice.