

CT PROTECTOR

Functions & Features

- CT protector that mounts to Mini-M type clustered mounting base or base socket input terminal and connects to CT signal conditioners with a connector
- When removing main unit, etc., prevents opening of CT secondary side

MODEL: CTM2-5

ORDERING INFORMATION

- Code number: CTM2-5

RATING

Current

5: 5 A

SPECIFICATIONS

Rating: 5 A

Rated over-range current: 50 A for 3 seconds, 10 A for 10 seconds;

Do not allow longer time as CTM2-5 is a protector with a diode.


INSTALLATION

Operating temperature: -10 to +60°C (14 to 140°F)

Operating humidity: 30 to 90 %RH (non-condensing)

Weight: Approx. 15 g (0.5 oz)

DIMENSIONS unit: mm (inch)

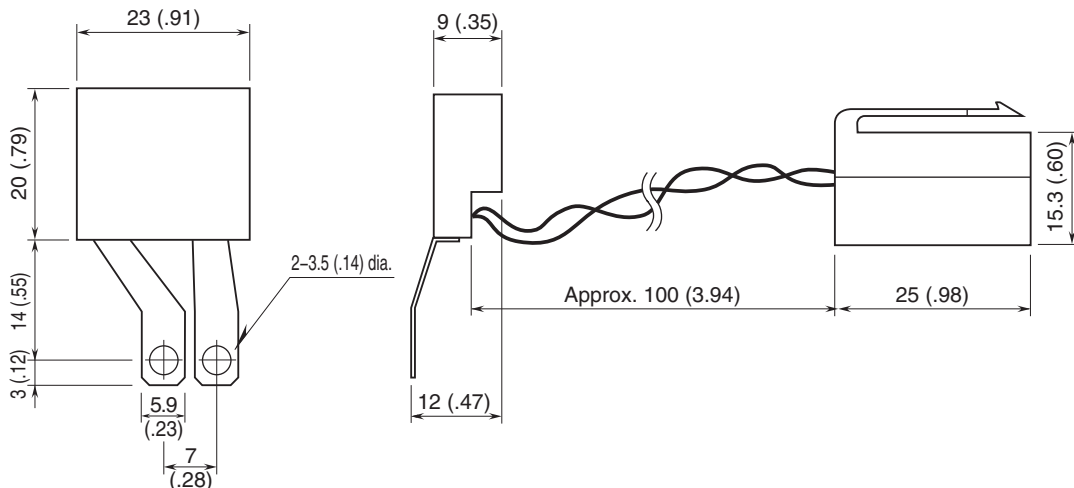

Specifications are subject to change without notice.