

Limit Alarms M-PAC


AC INPUT LIMIT ALARM

Functions & Features

- Accepting AC current and voltage inputs and providing relay contact closure(s) at a preset input level
- Single, latching or dual setpoint
- Failsafe operation available
- Deadband adjustable from 1 to 100%
- Indicator LED provided

Typical Applications

- Annunciator
- Various alarm applications



MODEL: MP16[1][2]-[3]-[4]/[5]

ORDERING INFORMATION

- Code number: MP16[1][2]-[3]-[4]/[5]
- Specify a code from below for each of [1] through [5].
(e.g. MP1600-A6-F/T/V)
- Special input and output ranges (For codes AZ & A8)

[1] RELAY CONTACT OUTPUT

- 0: Single (Hi) trip, non-latching
- 1: Single (Hi) trip, latching
- 2: Dual (Hi/Lo) trip, non-latching

[2] SETPOINT CONTROL

- 0: Front-accessed three-turn screwdriver adjust
- 2: Remote dial connections (total resistance 1 k - 100 k Ω)
- 3: DC programmable (0 - 1 V DC)

[3] INPUT

Current

- AA: 0 - 10 mA AC (Input resistance 10 Ω)
- AB: 0 - 50 mA AC (Input resistance 10 Ω)
- AC: 0 - 100 mA AC (Input resistance 10 Ω)

- AD: 0 - 500 mA AC (Input resistance 1 Ω)
- AZ: Specify current (See INPUT SPECIFICATIONS)
(0 % input must be 0 mA.)

Voltage

- A1: 0 - 100 mV AC (Input resistance 100 k Ω min.)
- A2: 0 - 500 mV AC (Input resistance 100 k Ω min.)
- A3: 0 - 1 V AC (Input resistance 100 k Ω min.)
- A4: 0 - 5 V AC (Input resistance 1 M Ω min.)
- A5: 0 - 10 V AC (Input resistance 1 M Ω min.)
- A6: 0 - 120 V AC (Input resistance 1 M Ω min.)
- A7: 0 - 150 V AC (Input resistance 1 M Ω min.)
- A8: Specify voltage (See INPUT SPECIFICATIONS)
(0 % input must be 0 V.)

[4] POWER INPUT

AC Power

- F: 120 V AC
- J: 240 V AC

DC Power

- S: 12 V DC
- R: 24 V DC

[5] OPTIONS

- H: Latching operation for dual trip; reset at power off (5 seconds min.)
(dual trip type only)
- R: Reversed relay sense
- T: Transmitter output (0 - 1 V DC)
- V: Relay drive voltage output
- X: Lo-trip sense for single trip; Lo/Lo for dual trip
- Y: Hi/Hi-trip sense for dual trip (dual trip type only)

GENERAL SPECIFICATIONS

- Construction:** Plug-in
- Connection:** M3.5 screw terminals
- Screw terminal:** Chromated steel
- Housing material:** Flame-resistant resin (black)
- Isolation:** Input to output to power
(non-isolated between I/O with Option V)
- Zero adjustment:** -5 to +5 % (front)
- Span adjustment:** 95 to 105 % (front)
- Setpoint adjustments:** Front accessed three-turn screwdriver, remote dial potentiometer or DC input
- Deadband adjustments:** Front accessed single-turn screwdriver; 1 - 100 %
- Front LEDs:** Red LED turns on at a tripped condition
- Power ON timer:** Relays de-energized for approx. 2 seconds after power is turned on.

INPUT SPECIFICATIONS

Frequency: 40 Hz min., 1 kHz max. with 100% input

■ **AC Current:** 0 - 1 A AC; input resistor incorporated

Minimum span: 1 mA

Input resistance

Span 1 mA - 500 mA: 10 Ω

Span 500 mA - 1 A: 1 Ω

Span 1 A: 0.5 Ω

■ **AC Voltage:** 0 - 250 V AC

Minimum span: 50 mV

Input Resistance

Span 50 mV - 5 V : 100 k Ω

Span \geq 5V : 1 M Ω

■ **Setpoint Control**

• **Remote dial connections**

Potentiometer: Total resistance 1 k - 100 k Ω

Excitation: 4 V DC

• **DC programmable:** 0 - 1 V DC

Response time: \leq 0.5 sec. (0 - 100 % at 90 % setpoint)

Line voltage effect: \pm 0.1 % over voltage range

Insulation resistance: \geq 100 M Ω with 500 V DC

Dielectric strength: 1000 V AC @ 1 minute

(input to output to power)

2000 V AC @ 1 minute (output to ground)

Common mode noise rejection:

60 Hz: Greater than 120 dB

DC: Greater than 140 dB

OUTPUT SPECIFICATIONS

■ **Relay Contact**

• **Single / Latching:** Isolated DPDT relay; de-energized at trip

• **Dual:** Isolated SPDT relay; energized at trip

Rating: 120 V AC @ 3 A ($\cos\theta=1$)

30 V DC @ 3 A (resistive load)

Electrical life: 10^5 cycles

Mechanical life: 10^7 cycles

For maximum relay life with inductive loads, external protection is recommended.

■ **Relay Drive Voltage Output (option V):** 24 V DC average; drives 1.2 k Ω or greater coil impedance

■ **Transmitter Output (option T):** 0 - 1 V DC; 1 mA max. (setpoint and process input)

INSTALLATION

Power input

• **AC:** Operational voltage range: rating \pm 10 %, 50/60 \pm 2 Hz, approx. 2 VA

• **DC:** Operational voltage range: rating \pm 10 % ripple 10 %p-p max.

80 mA at 24 V

160 mA at 12 V

Operating temperature: -5 to +60 $^{\circ}$ C (23 to 140 $^{\circ}$ F)

Storage temperature: -20 to +85 $^{\circ}$ C (-4 to +185 $^{\circ}$ F)

Operating humidity: 30 to 90 %RH (non-condensing)

Mounting: Surface (DIN rail available for 11-pin base)

Weight: 400 g (0.88 lb)


PERFORMANCE in percentage of span

Repeatability: \pm 0.2 %


Temp. coefficient: \pm 0.05 %/ $^{\circ}$ C (\pm 0.03 %/ $^{\circ}$ F)

EXTERNAL DIMENSIONS & TERMINAL ASSIGNMENTS unit: mm [inch]

11-PIN BASE

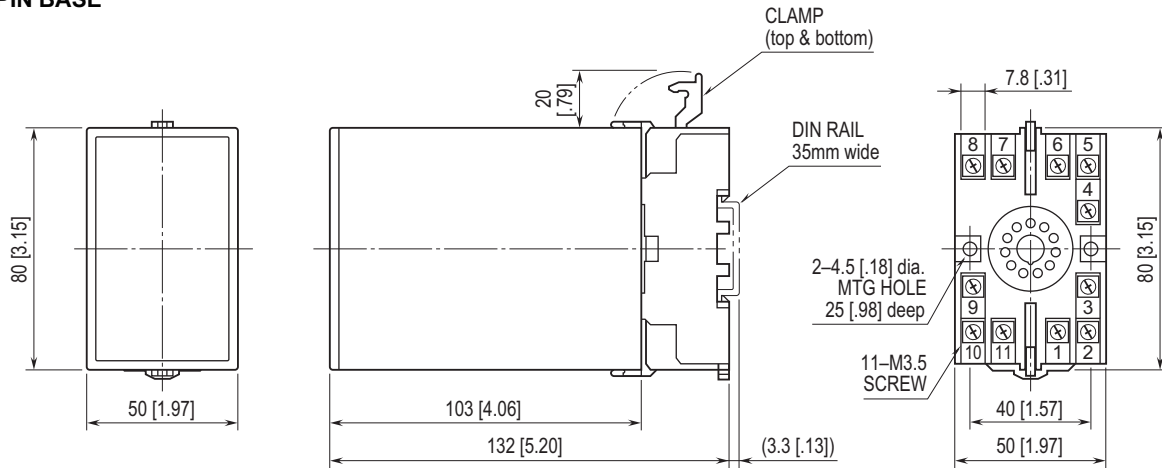


20-PIN BASE

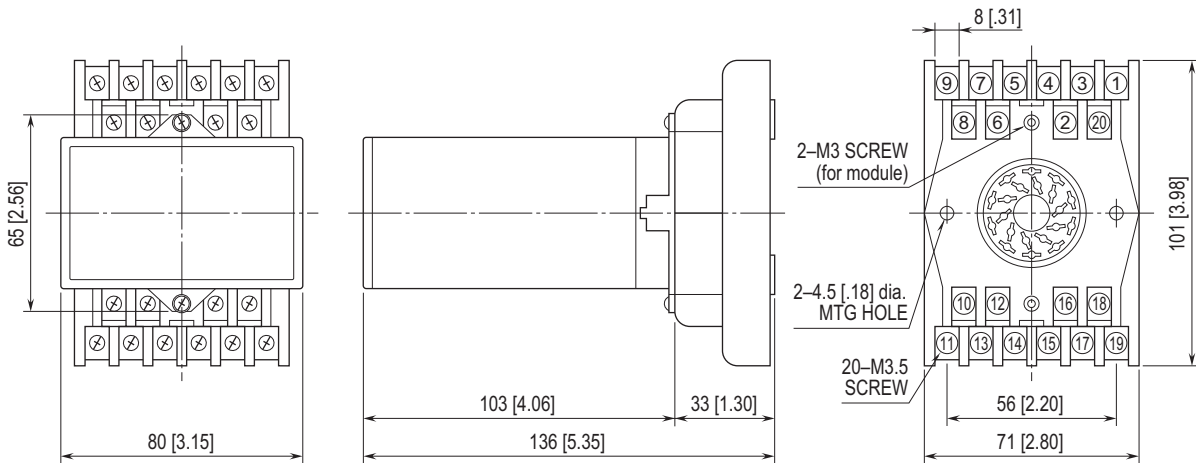


MOUNTING REQUIREMENTS unit: mm [inch]

11-PIN BASE

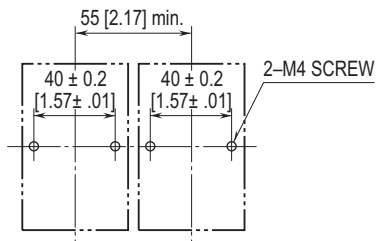


20-PIN BASE

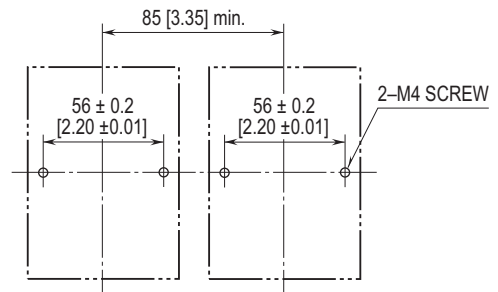


BLOCK DIAGRAM

■ SINGLE / LATCHING OUTPUT

•11-pin Base

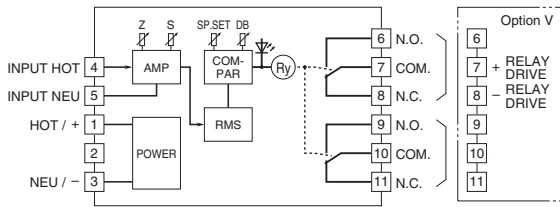


•20-pin Base

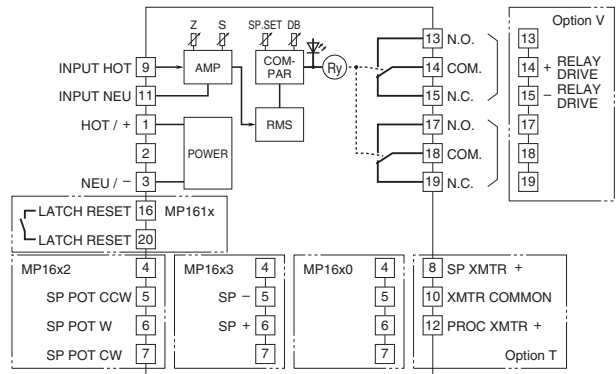


■ DUAL OUTPUT

•11-pin Base

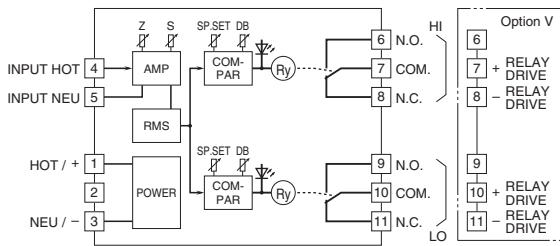

•20-pin Base

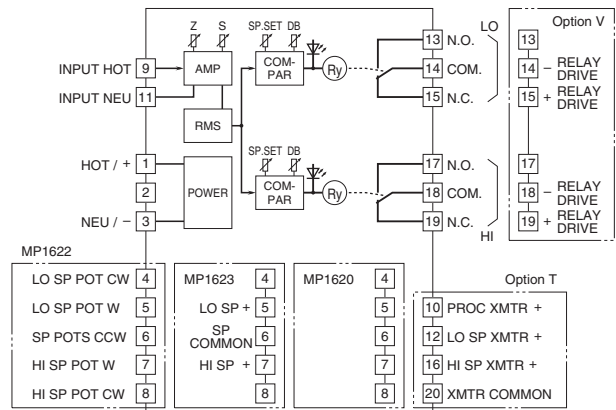

I/O TERMINAL ASSIGNMENT

■ SINGLE OUTPUT

PIN	MP1600	MP1600 w/Option T	MP1602	MP1602 w/Option T	MP1603	MP1603 w/Option T
1	POWER (Hot/+)	POWER (Hot/+)	POWER (Hot/+)	POWER (Hot/+)	POWER (Hot/+)	POWER (Hot/+)
2	No Connection	No Connection	No Connection	No Connection	No Connection	No Connection
3	POWER (Neu/-)	POWER (Neu/-)	POWER (Neu/-)	POWER (Neu/-)	POWER (Neu/-)	POWER (Neu/-)
4	INPUT (Hot)	No Connection	No Connection	No Connection	No Connection	No Connection
5	INPUT (Neu)	No Connection	SP Pot CCW	SP Pot CCW	SP -	SP -
6	N.O.	No Connection	SP Pot W	SP Pot W	SP +	SP +
7	COM *	No Connection	SP Pot CW	SP Pot CW	No Connection	No Connection
8	N.C. *	SP Xmtr +	No Connection	SP Xmtr +	No Connection	SP Xmtr +
9	N.O.	INPUT (Hot)	INPUT (Hot)	INPUT (Hot)	INPUT (Hot)	INPUT (Hot)
10	COM	Xmtr Common	No Connection	Xmtr Common	No Connection	Xmtr Common
11	N.C.	INPUT (Neu)	INPUT (Neu)	INPUT (Neu)	INPUT (Neu)	INPUT (Neu)
12		Proc Xmtr +	No Connection	Proc Xmtr +	No Connection	Proc Xmtr +
13		N.O.	N.O.	N.O.	N.O.	N.O.
14		COM *	COM *	COM *	COM *	COM *
15		N.C. *	N.C. *	N.C. *	N.C. *	N.C. *
16		No Connection	No Connection	No Connection	No Connection	No Connection
17		N.O.	N.O.	N.O.	N.O.	N.O.
18		COM	COM	COM	COM	COM
19		N.C.	N.C.	N.C.	N.C.	N.C.
20		No Connection	No Connection	No Connection	No Connection	No Connection

KEYS

N.O. = Normally Open
COM = Common
N.C. = Normally Closed
Proc = Process
Xmtr = Transmitter
SP = Setpoint
W = Wiper
CW = Clockwise
CCW = Counterclockwise

*Pins used for Option V

20-pin = 14(+) - 15(-)
11-pin = 7(+) - 8(-)

■ LATCHING OUTPUT

PIN	MP1610	MP1610 w/Option T	MP1612	MP1612 w/Option T	MP1613	MP1613 w/Option T
1	POWER (Hot/+)	POWER (Hot/+)	POWER (Hot/+)	POWER (Hot/+)	POWER (Hot/+)	POWER (Hot/+)
2	No Connection	No Connection	No Connection	No Connection	No Connection	No Connection
3	POWER (Neu/-)	POWER (Neu/-)	POWER (Neu/-)	POWER (Neu/-)	POWER (Neu/-)	POWER (Neu/-)
4	No Connection	No Connection	No Connection	No Connection	No Connection	No Connection
5	No Connection	No Connection	SP Pot CCW	SP Pot CCW	SP -	SP -
6	No Connection	No Connection	SP Pot W	SP Pot W	SP +	SP +
7	No Connection	No Connection	SP Pot CW	SP Pot CW	No Connection	No Connection
8	No Connection	SP Xmtr +	No Connection	SP Xmtr +	No Connection	SP Xmtr +
9	INPUT (Hot)	INPUT (Hot)	INPUT (Hot)	INPUT (Hot)	INPUT (Hot)	INPUT (Hot)
10	No Connection	Xmtr Common	No Connection	Xmtr Common	No Connection	Xmtr Common
11	INPUT (Neu)	INPUT (Neu)	INPUT (Neu)	INPUT (Neu)	INPUT (Neu)	INPUT (Neu)
12	No Connection	Proc Xmtr +	No Connection	Proc Xmtr +	No Connection	Proc Xmtr +
13	N.O.	N.O.	N.O.	N.O.	N.O.	N.O.
14	COM *	COM *	COM *	COM *	COM *	COM *
15	N.C. *	N.C. *	N.C. *	N.C. *	N.C. *	N.C. *
16	Latch Reset	Latch Reset	Latch Reset	Latch Reset	Latch Reset	Latch Reset
17	N.O.	N.O.	N.O.	N.O.	N.O.	N.O.
18	COM	COM	COM	COM	COM	COM
19	N.C.	N.C.	N.C.	N.C.	N.C.	N.C.
20	Latch Reset	Latch Reset	Latch Reset	Latch Reset	Latch Reset	Latch Reset

KEYS

N.O. = Normally Open
COM = Common
N.C. = Normally Closed
Proc = Process
Xmtr = Transmitter
SP = Setpoint
W = Wiper
CW = Clockwise
CCW = Counterclockwise

*Pins used for Option V

20-pin = 14(+) - 15(-)

■ DUAL OUTPUT

PIN	MP1620	MP1620 w/Option T	MP1622	MP1622 w/Option T	MP1623	MP1623 w/Option T
1	POWER (Hot/+)	POWER (Hot/+)	POWER (Hot/+)	POWER (Hot/+)	POWER (Hot/+)	POWER (Hot/+)
2	No Connection	No Connection	No Connection	No Connection	No Connection	No Connection
3	POWER (Neu/-)	POWER (Neu/-)	POWER (Neu/-)	POWER (Neu/-)	POWER (Neu/-)	POWER (Neu/-)
4	INPUT (Hot)	No Connection	Lo SP Pot CW	Lo SP Pot CW	No Connection	No Connection
5	INPUT (Neu)	No Connection	Lo SP Pot W	Lo SP Pot W	Lo SP +	Lo SP +
6	N.O.	No Connection	SP Pots CCW	SP Pots CCW	SP Common	SP Common
7	COM *	No Connection	Hi SP Pot W	Hi SP Pot W	Hi SP +	Hi SP +
8	N.C. *	No Connection	Hi SP Pot CW	Hi SP Pot CW	No Connection	No Connection
9	N.O.	INPUT (Hot)	INPUT (Hot)	INPUT (Hot)	INPUT (Hot)	INPUT (Hot)
10	COM *	Proc Xmtr +	No Connection	Proc Xmtr +	No Connection	Proc Xmtr +
11	N.C. *	INPUT (Neu)	INPUT (Neu)	INPUT (Neu)	INPUT (Neu)	INPUT (Neu)
12		Lo SP Xmtr +	No Connection	Lo SP Xmtr +	No Connection	Lo SP Xmtr +
13		N.O.	N.O.	N.O.	N.O.	N.O.
14		COM *	COM *	COM *	COM *	COM *
15		N.C. *	N.C. *	N.C. *	N.C. *	N.C. *
16		Hi SP Xmtr +	No Connection	Hi SP Xmtr +	No Connection	Hi SP Xmtr +
17		N.O.	N.O.	N.O.	N.O.	N.O.
18		COM *	COM *	COM *	COM *	COM *
19		N.C. *	N.C. *	N.C. *	N.C. *	N.C. *
20		Xmtr Common	No Connection	Xmtr Common	No Connection	Xmtr Common

KEYS

N.O. = Normally Open
COM = Common
N.C. = Normally Closed
Proc = Process
Xmtr = Transmitter
SP = Setpoint
W = Wiper
CW = Clockwise
CCW = Counterclockwise

*Pins used for Option V

20-pin:
Hi Set = 19(+) - 18(-)
Lo Set = 15(+) - 14(-)
11-pin:
Hi Set = 7(+) - 8(-)
Lo Set = 10(+) - 11(-)



Specifications are subject to change without notice.