

**Plug-in Signal Conditioners M-UNIT**

**PULSE ISOLATOR**


(built-in excitation)

**Functions & Features**

- Galvanically isolating pulse rate signals
- Input frequency = output frequency
- Various outputs (relay, open collector and voltage pulses)
- Excitation
- Isolation up to 2000 V AC
- High-density mounting

**Typical Applications**

- Isolating field pulse signals in order to reduce noises
- Changing e.g. dry contact signal to e.g. 5 V signals

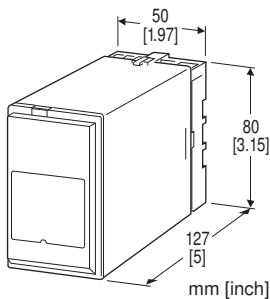

**MODEL: PPD-[1][2][3][4][5]-[6][7]**

**ORDERING INFORMATION**

- Code number: PPD-[1][2][3][4][5]-[6][7]
- Specify a code from below for each of [1] through [7]. (e.g. PPD-D4A3N-K/Q)
- Output pulse width (e.g. 75 msec.)
- Use Ordering Information Sheet (No. ESU-1370). Default setting (table below) will be used if not otherwise specified.
- Specify the specification for option code /Q (e.g. /C01/S01)

**Factory setting**  
**■ PULSE INPUT SETTING**

**•Dry Contact**

Input	Semiconductor contact
Filter	W/O (without)
Threshold 1 – 8 V	2 V
Hysteresis 0 – 5 V	0.5 V

**•Voltage pulse**

Input waveform	Square
Input coupling	DC
Input amplitude	0.5 – 50 Vp-p
Offset	≤ 50 V
Filter	W/O (without)
Threshold 0 – 15 V	1/2 amplitude
Hysteresis 0 – 5 V	0.5 V

**•5 V voltage pulse**

Filter	W/O (without)
--------	---------------

**•12 V, 24 V voltage pulse**

Filter	W/O (without)
--------	---------------

**•2- wire current pulse**

ON current (H) 0 – 25 mA	14.5 mA
OFF current (L) 0 – 25 mA	9.5 mA
Filter	W/O (without)

**■ SETTINGS FOR PULSE OUTPUT**

Output pulse width	50 ms
--------------------	-------

**[1] INPUT**

- A: Dry contact
- B: Voltage pulse (Specify sensitivity)
- C: 5 V pulse (sensitivity 2 V)
- D: 12 V/24 V pulse (sensitivity 5 V)
- H: Two-wire current pulse

**[2] EXCITATION**

- 1: 5 V DC @ 120 mA
- 4: 12 V DC @ 60 mA
- 7: 24 V DC @ 25 mA

**[3] OUTPUT**

- A: Open collector (max. 100 kHz)
- M: 5 V pulse (max. 100 kHz)
- N: 12 V pulse (max. 100 kHz)
- P: 24 V pulse (max. frequency 50 kHz)
- H: High power photo MOSFET relay (max. 20 Hz)
- ( ) = Max. frequency

**[4] OUTPUT PULSE WIDTH**

- 1: Equal to the input
- 3: One-shot output (std. pulse width 50 msec.) (Specify when optional pulse width is required.)

## [5] OUTPUT LOGIC

**N:** The same as the input  
**R:** Inverted

## [6] POWER INPUT

AC Power  
**K:** 85 - 132 V AC  
 (Operational voltage range 85 - 132 V, 47 - 66 Hz)  
 DC Power  
**S:** 12 V DC  
 (Operational voltage range 12 V  $\pm$ 10 %, ripple 10 %p-p max.)  
**R:** 24 V DC  
 (Operational voltage range 24 V  $\pm$ 10 %, ripple 10 %p-p max.)  
**V:** 48 V DC  
 (Operational voltage range 48 V  $\pm$  10 % , ripple 10 % p-p max.)  
**P:** 110 V DC  
 (Operational voltage range 85 - 150 V, ripple 10 %p-p max.)

## [7] OPTIONS

**blank:** none  
**/Q:** With options (specify the specification)

### SPECIFICATIONS OF OPTION: Q (multiple selections)

COATING (For the detail, refer to our web site.)  
**/C01:** Silicone coating  
**/C02:** Polyurethane coating  
**/C03:** Rubber coating  
 TERMINAL SCREW MATERIAL  
**/S01:** Stainless steel

### GENERAL SPECIFICATIONS

**Construction:** Plug-in  
**Connection:** M3.5 screw terminals  
**Screw terminal:** Chromated steel (standard) or stainless steel  
**Housing material:** Flame-resistant resin (black)  
**Isolation:** Input or sensor exc. to output to power  
**DIP SW1 & SW2:** Used for input spec. setting  
**Input monitor (PL1):** Red LED blinks when pulse input  
**Input monitor (PL2):** Not used  
**Excitation adjustment:** 5 - 24 V DC  
**Input pulse sensing:** DC coupled standard or AC coupled  
**Input filter:** None, 10 ms (for chattering), 0.1 ms (for noise), selectable with DIP switch

### INPUT SPECIFICATIONS

**Excitation:** Shortcircuit protection; approx. 440 mA at shortcircuit  
**Pulse width time requirement:**  $\geq 5 \mu\text{sec}$ .  
 The detecting levels shown below are default value. Refer to

the manual for adjustment.

#### ■ Dry Contact

**Max. frequency:** 100 kHz

#### Detecting Conditions

**Exc. code:** 1  
**Sensing:** 5 V DC / 0.5 mA  
**Detecting level:**  
 OFF:  $\geq 2.25 \text{ V} / \geq 8.2 \text{ k}\Omega$   
 ON:  $\leq 1.75 \text{ V} / \leq 5.3 \text{ k}\Omega$

**Exc. code:** 4  
**Sensing:** 12 V DC / 1.2 mA  
**Detecting level:**  
 OFF:  $\geq 2.25 \text{ V} / \geq 2.3 \text{ k}\Omega$   
 ON:  $\leq 1.75 \text{ V} / \leq 1.7 \text{ k}\Omega$

**Exc. code:** 7  
**Sensing:** 16 V DC / 2.4 mA  
**Detecting level:**  
 OFF:  $\geq 2.25 \text{ V} / \geq 1 \text{ k}\Omega$   
 ON:  $\leq 1.75 \text{ V} / \leq 0.8 \text{ k}\Omega$

Sensing voltage means the excitation supply to the sensor and the current value indicates that at shortcircuit. Detecting level means the threshold used to determine ON or OFF status of the pulses and the resistance values indicated that of the sensor.

#### ■ Voltage Pulse

**Maximum frequency:** 100 kHz  
 • **Customised pulse:** Specify DC offset and amplitude.


**Waveform:** Square or sine  
**Input impedance:**  $\geq 10 \text{ k}\Omega$   
**Input amplitude:** 0.5 - 50 Vp-p  
**Max. voltage between input terminals:** 50 V  
 • **5 V, 12 V, 24 V Pulse**

**Waveform:** Square or sine  
**Input impedance:**  $\geq 10 \text{ k}\Omega$   
**Detecting level**  
**5 V Pulse:**  $V_H \geq 2.25 \text{ V}, V_L \leq 1.75 \text{ V}$   
**12 V / 24 V Pulse:**  $V_H \geq 5.25 \text{ V}, V_L \leq 4.75 \text{ V}$   
 ( $V_H - V_L \geq 500 \text{ mV}$ )


#### ■ Two-wire Current Pulse

**Max. frequency:** 100 kHz  
**Input resistance:** receiving resistor 100  $\Omega$   
**Input range:** 0 - 25 mA  
**Hi/Lo level:**  $\leq 9.5 \text{ mA}$  for Lo,  $\geq 14.5 \text{ mA}$  for Hi

#### ■ Voltage pulse waveform

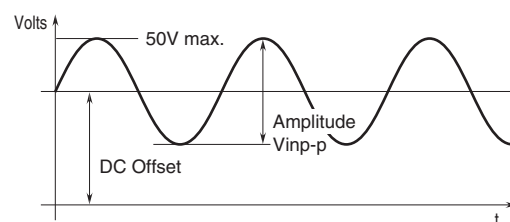

## ■ Voltage pulse (example)

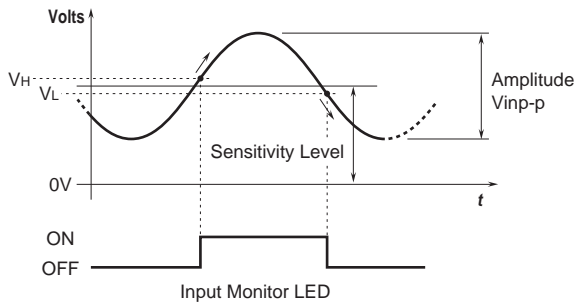

## PERFORMANCE

### Response time

**Open collector or voltage pulse:** the output is delayed at both pulse rise and fall by 3  $\mu$ sec. each. The delay could be much longer for certain types of load for open collector.

**High power photo MOSFET relay:** the output is delayed by 10 msec. at the rise, by 3 msec. at the fall.

**Insulation resistance:**  $\geq 100 \text{ M}\Omega$  with 500 V DC

**Dielectric strength:** 2000 V AC @1 minute (input to output to power to ground)

## OUTPUT SPECIFICATIONS

### ■ High Power Photo MOSFET Relay

Maximum frequency: 20 Hz

- Rise time: 5 msec.
- Sink time: 3 msec.

Rating: 120 V AC or 120 V DC @ 200 mA (resistive load)

On resistance: 3  $\Omega$

### ■ Open Collector

Maximum frequency: 100 kHz

50 V DC @ 50 mA (resistive load)

Saturation voltage: 0.5 V DC

■ Voltage Pulse: Rating (5, 12 or 24 V)  $\pm 10 \%$

Maximum frequency: 100 kHz (50 kHz for 24 V)

Load resistance:  $\geq 1.2 \text{ k}\Omega$

Low level:  $\leq 0.5 \text{ V}$

## OUTPUT PULSE WIDTH

■ Equal to the input: Output waveforms have the same period and duty ratio as those of input waveforms (when DC coupled).

### ■ One-shot Output

The PPD detects a pulse sink and outputs [input pulse width  $\pm 20 \%$ ]; 50 msec. standard

Note: 2 types of one-shot detection are available: pulse rise or sink. Refer to the table on the "Output Logic" section and specify when ordering.

Optional pulse width: 30  $\mu$ sec. - 300 msec.

## INSTALLATION

### Power consumption

- AC: Approx. 6 VA
- DC: Approx. 6 W (230 mA at 24 V)

Operating temperature: -5 to +60°C (23 to 140°F)


Operating humidity: 30 to 90 %RH (non-condensing)

Mounting: Surface or DIN rail

Weight: 200 g (0.44 lb)

## EXTERNAL VIEW

Note: This unit is factory calibrated according to the Ordering Information. If you need to change hardware setting, refer to the instruction manuals of the transmitter.

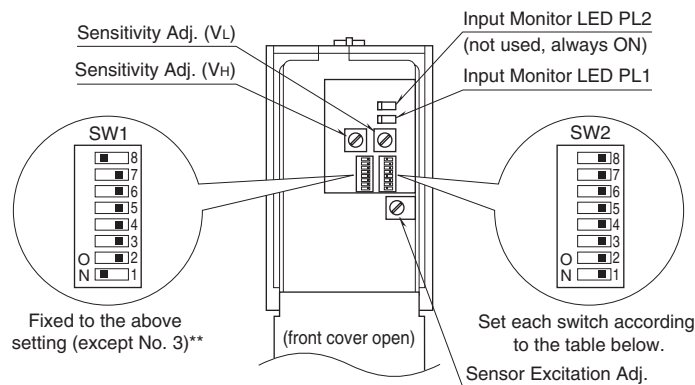


## OUTPUT LOGIC

OUTPUT WAVEFORM		INPUT WAVEFORM	VOLTAGE PULSE or 2-WIRE CURRENT PULSE		DRY CONTACT	
			H	L	OFF	ON
VOLTAGE PULSE	Non Inverted	No pulse width conversion	H	L	H	L
		One-shot, detecting input pulse rise	H	L	H	L
		One-shot, detecting input pulse drop	H	L	H	L
	Inverted	No pulse width conversion	H	L	H	L
		One-shot, detecting input pulse rise	H	L	H	L
		One-shot, detecting input pulse drop	H	L	H	L
OPEN COLLECTOR or POWER PHOTO MOSFET RELAY	Non Inverted	No pulse width conversion	OFF	ON	OFF	ON
		One-shot, detecting input pulse rise	OFF	ON	OFF	ON
		One-shot, detecting input pulse drop	OFF	ON	OFF	ON
	Inverted	No pulse width conversion	OFF	ON	OFF	ON
		One-shot, detecting input pulse rise	OFF	ON	OFF	ON
		One-shot, detecting input pulse drop	OFF	ON	OFF	ON


The pulse width in one-shot means the bold lined section of a pulse waveform.

## EXTERNAL DIMENSIONS & TERMINAL ASSIGNMENTS unit: mm [inch]

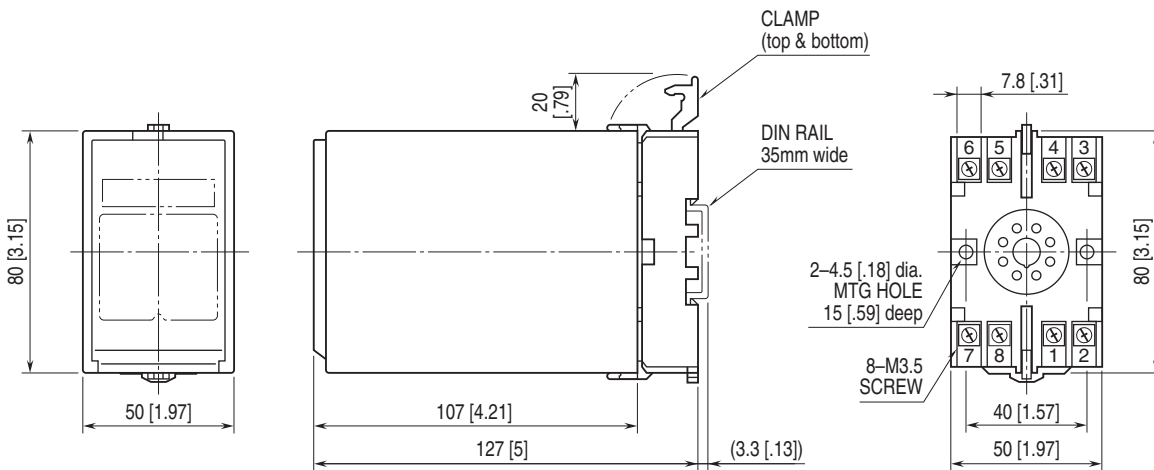

• When mounting, no extra space is needed between units.

## SCHEMATIC CIRCUITRY & CONNECTION DIAGRAM

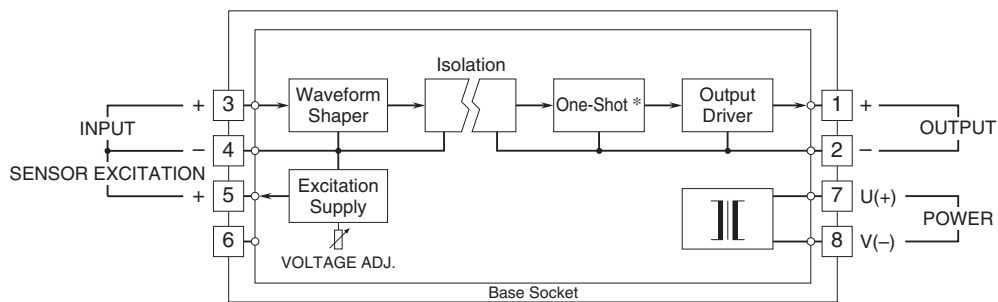


\* Provided only when the one-shot output is specified.

Note: With 24V excitation and dry contact input, the voltage across the terminals 3 – 4, divided in the waveform shaper, is of approx. 16V.


### Input Connection Examples

#### ■ Dry Contact




#### ■ 2-Wire Current Pulse


##### • Built-in Excitation



#### ■ Voltage Pulse




#### • External DC Supply




### Output Connection Examples

#### ■ Open Collector




#### ■ Voltage Pulse




#### ■ Power Photo MOSFET Relay

##### • AC Powered

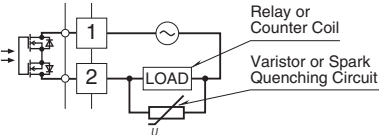

##### • DC Powered

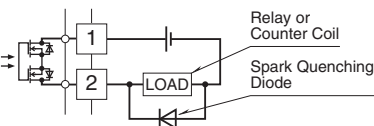

Specifications are subject to change without notice.