

## Plug-in Signal Conditioners M-UNIT

### DIFFERENTIAL RTD TRANSMITTER


(isolated)

#### Functions & Features

- Providing a DC output in proportion to the temperature difference between two RTDs
- Isolation up to 2000 V AC
- Fast response type available
- LCD meter (engineering unit display selectable)
- Simple loop test output (0 % and 100 %)
- High-density mounting

#### Typical Applications

- Measuring temperature difference between the inlet and outlet of a heat exchanger
- Coolant
- Power plant



### MODEL: DRS-[1]-[2][3]

#### ORDERING INFORMATION

- Code number: DRS-[1]-[2][3]  
Specify a code from below for each of [1] through [3].  
(e.g. DRS-A-B/E/K/Q)
- Special output range (For codes Z & 0)
- Specify the specification for option code /Q  
(e.g. /C01/S01)

#### INPUT (2-wire RTDs, dual input)

JPt100 (JIS'89) or Pt100 (JIS'97, IEC)

Pt100 (JIS '89) is deviated from Pt100

(JIS '97) only within the described accuracy.

#### [1] OUTPUT

Current

- A:** 4 - 20 mA DC (Load resistance 750 Ω max.)
- B:** 2 - 10 mA DC (Load resistance 1500 Ω max.)
- C:** 1 - 5 mA DC (Load resistance 3000 Ω max.)
- D:** 0 - 20 mA DC (Load resistance 750 Ω max.)

- E:** 0 - 16 mA DC (Load resistance 900 Ω max.)
- F:** 0 - 10 mA DC (Load resistance 1500 Ω max.)
- G:** 0 - 1 mA DC (Load resistance 15 kΩ max.)
- Z:** Specify current (See OUTPUT SPECIFICATIONS)  
Voltage
- 1:** 0 - 10 mV DC (Load resistance 10 kΩ min.)
- 2:** 0 - 100 mV DC (Load resistance 100 kΩ min.)
- 3:** 0 - 1 V DC (Load resistance 100 Ω min.)
- 4:** 0 - 10 V DC (Load resistance 1000 Ω min.)
- 5:** 0 - 5 V DC (Load resistance 500 Ω min.)
- 6:** 1 - 5 V DC (Load resistance 500 Ω min.)
- 0:** Specify voltage (See OUTPUT SPECIFICATIONS)

#### [2] POWER INPUT

AC Power

- B:** 100 V AC
- C:** 110 V AC
- D:** 115 V AC
- F:** 120 V AC
- G:** 200 V AC
- H:** 220 V AC
- J:** 240 V AC

DC Power

- S:** 12 V DC
- R:** 24 V DC
- V:** 48 V DC
- P:** 110 V DC (Not selectable with Option /E2.)

#### [3] OPTIONS (multiple selections)

LCD Meter (for indicating temperature difference)

**blank:** Without

**/E:** With (0.0 - 100.0 % display)

**/E2:** With (in engineering unit with backlight and the simple loop test output)

Response Time (0 - 90 %)

**blank:** Standard ( $\leq 0.5$  sec.)

**/K:** Fast response (Approx. 25 msec.)

(Not selectable with Option /E2)

Other Options

**blank:** none

**/Q:** Option other than the above (specify the specification)

#### SPECIFICATIONS OF OPTION: Q (multiple selections)

COATING (For the detail, refer to our web site.)

**/C01:** Silicone coating

**/C02:** Polyurethane coating

**/C03:** Rubber coating

TERMINAL SCREW MATERIAL

**/S01:** Stainless steel

## GENERAL SPECIFICATIONS

**Construction:** Plug-in  
**Connection:** M3.5 screw terminals  
**Screw terminal:** Chromated steel (standard) or stainless steel  
**Housing material:** Flame-resistant resin (black)  
**Isolation:** Input to output to power  
**Overrange output:** Approx. -10 to +120 % at 1 - 5 V  
**Zero adjustment:** -5 to +5 % (front)  
**Span adjustment:** 95 to 105 % (front)  
**Simple loop test output:** 0 % and 100 % signal simulated by selecting the front switch positions. (Only for option code /E2)  
**■ DISPLAY (LCD meter)**  
 • **Option code:** /E  
**LCD digital display:** 0.0 - 100.0 % (min. digit 0.1 %)  
 (No scaling)  
 • **Option code:** /E2  
**LCD digital display:** Engineering unit  
**Display scaling:** -10000 - +10000  
**Decimal position:**  $10^{-1}$  -  $10^{-4}$  or no decimal point  
**Engineering unit:** %,  $\mu$ V, mV, V, mA, A, °C, °F,  $\Omega$ , DEG K, mHz, Hz, kHz, VAC, AAC, mg, g, kg, t, rpm or rps selectable  
**Back light:** Green at normal, red at loop test output enable  
**Factory setting:** scaling 0.00 - 100.00, unit: %

• **DC:** Operational voltage range: rating  $\pm 10$  %, or 85 - 150 V for 110 V rating (ripple 10 % p-p max.) approx. 2 W (80 mA at 24 V; approx. 3 W with Option /E2)  
**Operating temperature:** -5 to +60°C (23 to 140°F)  
**Operating humidity:** 30 to 90 %RH (non-condensing)  
**Mounting:** Surface or DIN rail  
**Weight:** 350 g (0.77 lb)

## PERFORMANCE in percentage of span

**Accuracy:**  $\pm 0.2$  % (Temperature within 15 - 35°C or 59 - 95°F)  
**Display accuracy:**  $\pm (0.2 \text{ % of FS} + 1 \text{ digit})$   
 (Temperature within 15 - 35°C or 59 - 95°F)  
**Simple loop test output setting accuracy:**  $\pm 0.5$  %  
**Temp. coefficient:**  $\pm 0.015 \text{ %/}^\circ\text{C}$  ( $\pm 0.008 \text{ %/}^\circ\text{F}$ )  
**Line voltage effect:**  $\pm 0.1$  % over voltage range  
**Insulation resistance:**  $\geq 100 \text{ M}\Omega$  with 500 V DC  
**Dielectric strength:** 2000 V AC @1 minute (input to output to power to ground)

## INPUT SPECIFICATIONS

**Input:** 2-wire RTDs (two)  
**Maximum leadwire resistance:** Difference 0.5  $\Omega$  maximum between the transmitter and each RTD; each leadwire resistance 10  $\Omega$  or less  
**Sensing current:** 2 mA  
**Difference range:** 0 - 20°C or 0 - 36°F (fixed)  
**Temperature range:** 0 - 50°C or 32 - 122°F (fixed)

## OUTPUT SPECIFICATIONS

**■ DC Current:** 0 - 20 mA DC  
**Minimum span:** 1 mA  
**Offset:** Max. 1.5 times span  
**Load resistance:** Output drive 15 V max.  
**■ DC Voltage:** -10 - +12 V DC  
**Minimum span:** 5 mV  
**Offset:** Max. 1.5 times span  
**Load resistance:** Output drive 10 mA max.; 5 mA for negative voltage output; at  $\geq 0.5$  V



## INSTALLATION

**Power input**  
 • **AC:** Operational voltage range: rating  $\pm 10$  %, 50/60  $\pm 2$  Hz, approx. 2 VA  
 (approx. 3 VA with Option /E2)


## EXTERNAL VIEW

■ OPTION /E

■ OPTION /E2

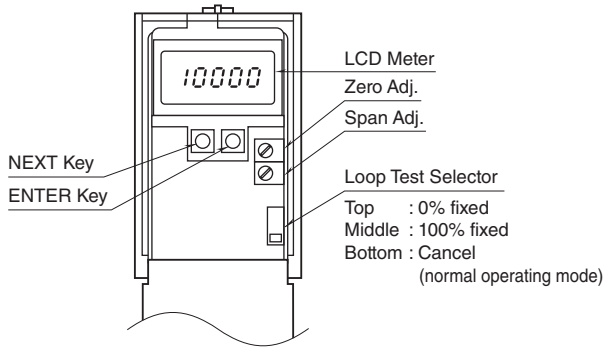


## EXTERNAL DIMENSIONS & TERMINAL ASSIGNMENTS unit: mm [inch]

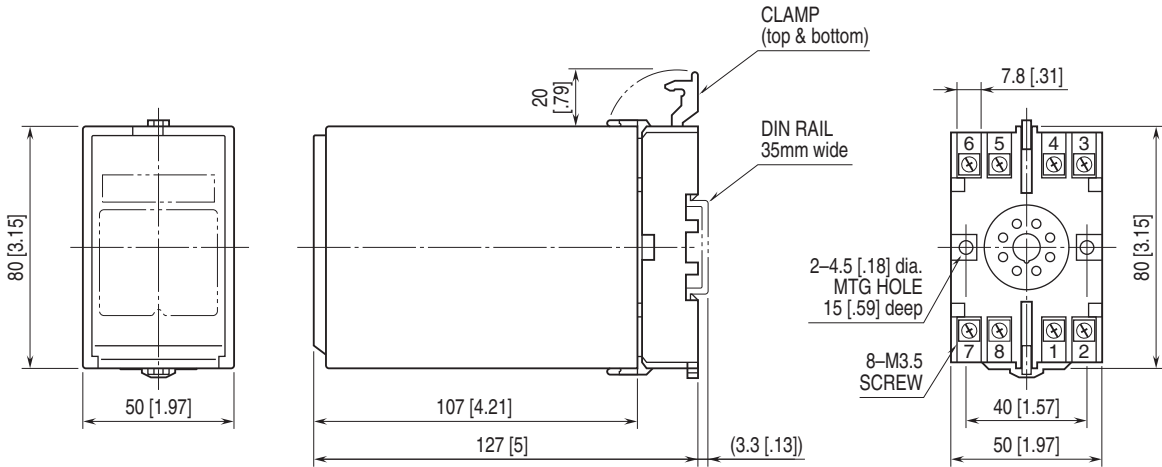

• When mounting, no extra space is needed between units.

## SCHEMATIC CIRCUITRY & CONNECTION DIAGRAM

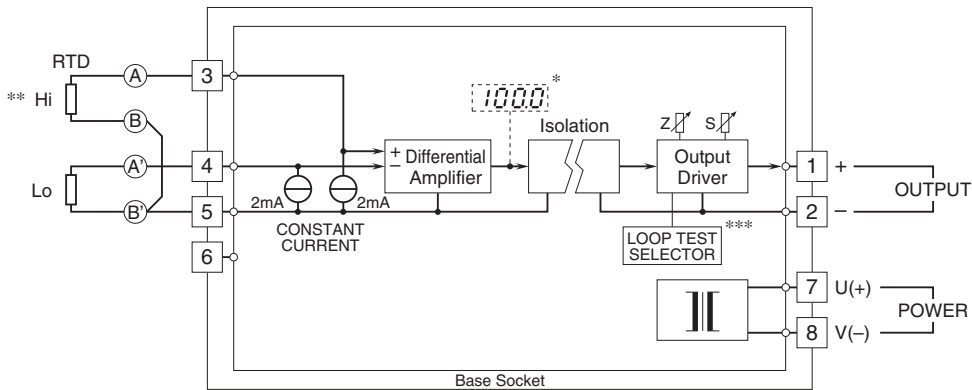

\* Option /E, E2

\*\* Be sure to connect the high temp. RTD to the terminal No. 3 for proper operation.

\*\*\*Option /E2



Specifications are subject to change without notice.