

## RGP30 Series


/E: English

### REMOTE GRAPHIC PANEL

(with HDMI™ output)

#### Functions & Features

- Fulfills the function of display units using Web technology without dedicated displays.
- Supports Modbus/TCP and SLMP for connecting with various PLCs.
- Equipped with Web server which allows access via network and displays Web screen on browser of the user's terminal.
- Equipped with HDMI output for connecting with an HDMI monitor.
- Facilitates creation of Graphic Panels with Designing Software (model: RGP-Designer).

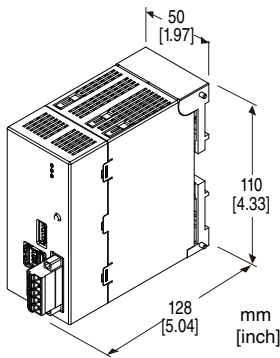

The terms HDMI, HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc.

### MODEL: RGP30-N-R[1]

#### ORDERING INFORMATION

- Code number: RGP30-N-R[1]
- Specify a code from below for [1].  
(e.g. RGP30-N-R/E)

#### TYPE

N: Standard

#### POWER INPUT

DC power

R: 24 V DC

(Operational voltage range: ±10 %; ripple 10 %p-p max.)

#### [1] OPTIONS

OS Language

Blank: Japanese

#### RELATED PRODUCTS

- Graphic Panel Designing Software for RGP30 Series (model: RGP-Designer)
  - Local certification authority creator (model: LCA-RGP)
- Softwares are downloadable at our web site.

#### GENERAL SPECIFICATIONS

##### Connection

- **Power supply:** Spring clamp terminal block

**Applicable wire size:** 0.2 - 2.5 mm<sup>2</sup>

**Stripped length:** 10 mm

##### Recommended solderless terminal

AI0,25-10YE 0.25 mm<sup>2</sup> (Phoenix Contact)

AI0,34-10TQ 0.34 mm<sup>2</sup> (Phoenix Contact)

AI0,5-10WH 0.5 mm<sup>2</sup> (Phoenix Contact)

AI0,75-10GY 0.75 mm<sup>2</sup> (Phoenix Contact)

AI1-10RD 1.0 mm<sup>2</sup> (Phoenix Contact)

AI1,5-10BK 1.5 mm<sup>2</sup> (Phoenix Contact)

AI2,5-10BU 2.5 mm<sup>2</sup> (Phoenix Contact)

- **Ethernet:** RJ-45 connector

- **USB:** USB type A connector

- **HDMI:** HDMI connector

**Housing material:** Flame-resistant resin (gray)

**Isolation:** Ethernet to USB or HDMI or internal power or power supply to FE

**Indicator LEDs:** POWER, RUN, ERROR

(Refer to the instruction manual for details)

#### CONTROL CIRCUIT

**CPU:** Intel Atom E3827 (Dual Core 1.75 GHz)

**Memory:** 2 GB DDR3K-1333

**Internal storage:** 30 GB

**OS:** Microsoft Windows 10 IoT Enterprise 2016 LTSB

#### ETHERNET COMMUNICATION

**Communication Standard:** IEEE 802.3u

**Transmission:** 10BASE-T / 100BASE-TX

**Baud rate:** 10 / 100 Mbps (Auto Negotiation function)

**Protocol:** TCP/IP, Modbus/TCP, SLMP, HTTPS, HTTP

**Transmission media:** 10BASE-T (STP, Category 5)

100BASE-TX (STP, Category 5e)

**Max. length of fieldbus segment:** 100 meters

**Ethernet Status LED:** ACT, LNK

**IP address:** 192.168.0.1 (Ex-factory setting)

#### USB

**Specification:** USB 2.0

**No. of ports:** 2

**Transmission distance:** 5 meters max.

**Power supply capability:** 5V DC±10%, 500mA DC max.

## MDMI

**Max. resolution:** 1920 x 1080

**Frame rate:** 60 Hz

**Transmission distance:** 5 meters max.

**Applicable cable:** Standard HDMI cable

## INSTALLATION

**Power consumption :** Approx. 18 W

**Operating temperature:** -10 to +50°C (14 to 122 °F)

**Operating humidity:** 30 to 90 %RH (non-condensing)

**Atmosphere:** No corrosive gas or heavy dust

**Mounting:** DIN rail

**Weight:** 400 g (0.88 lb)

## PERFORMANCE

**Calendar clock (with battery backup):**

**Accuracy:** Monthly deviation of ≤ 3 minutes at 25°C or 77 °F

**Back up period:** Approx. 10 years at 25°C or 77 °F


**Battery:** Primary lithium battery (non-removable)

**Insulation resistance:** ≥ 100 MΩ with 500 V DC


**Dielectric strength:** 1500 V AC @ 1 minute (Ethernet to USB or HDMI or internal power or power supply to FE)

## EXTERNAL VIEW

### ■ FRONT VIEW

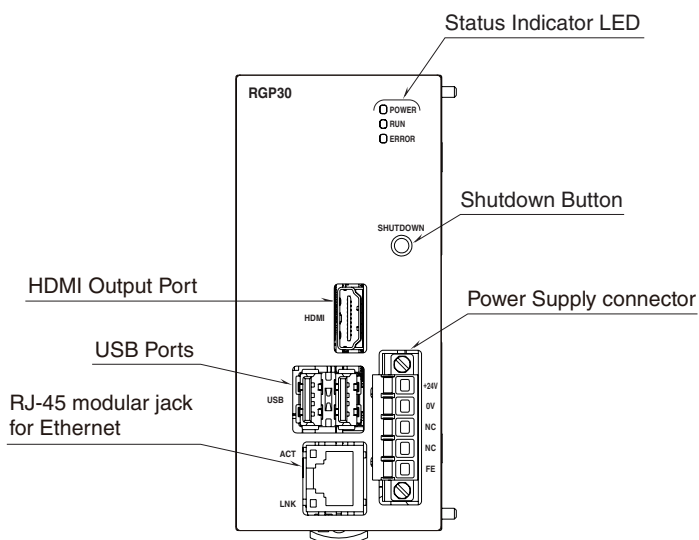


## EXTERNAL DIMENSIONS unit: mm [inch]

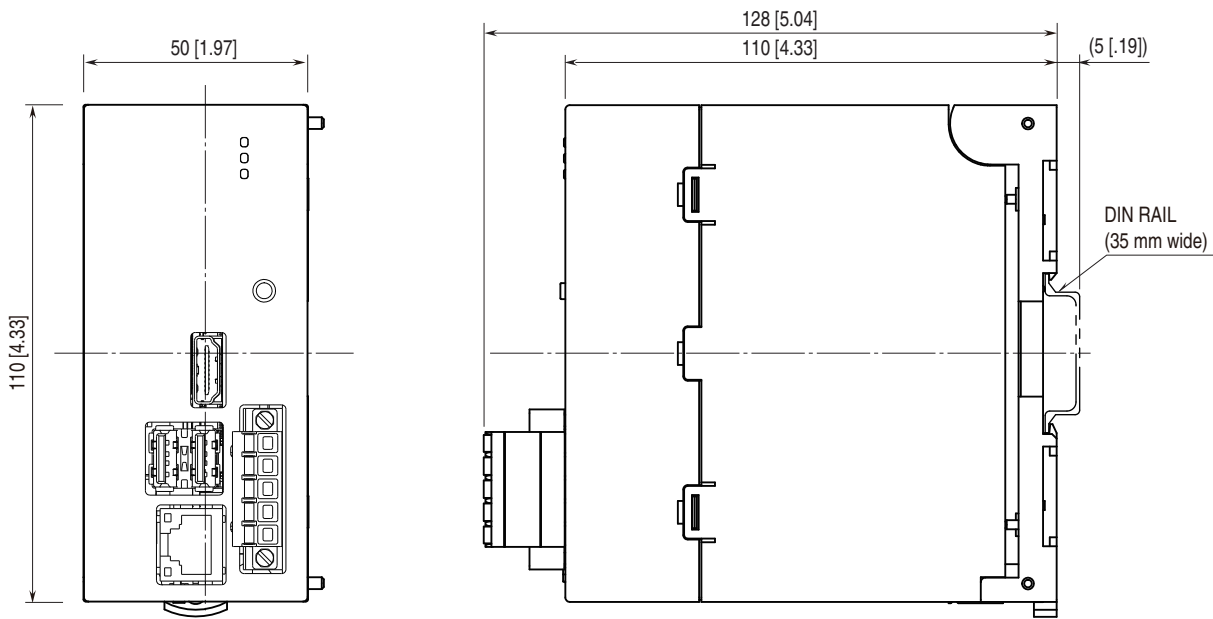

## SCHEMATIC CIRCUITRY & CONNECTION DIAGRAM

Caution: FE terminal is NOT a protective conductor terminal.

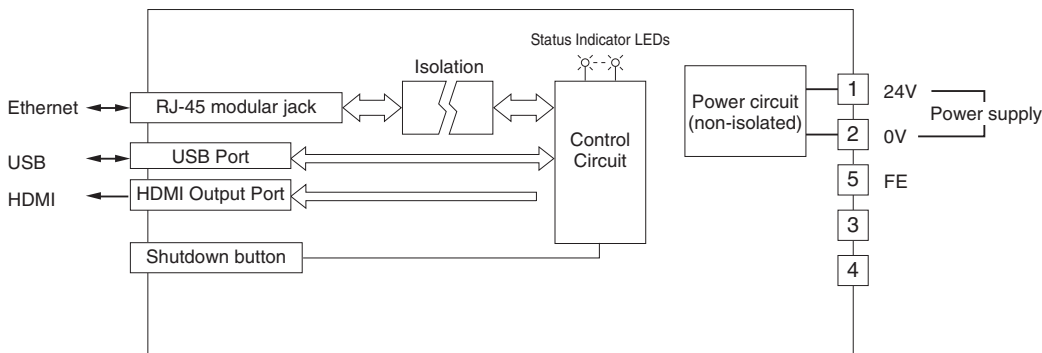

## DISPLAY FUNCTION

- No. of GP (Graphic Panels) for simultaneous display: Max.8
- Screen size: VGA (640\*480), SVGA (800\*600), XGA (1024\*768), SXGA (1280\*1024), HD (1280\*720), FHD (1920\*1080), Custom
- No. of Screens: Max. 1024 for 8 GPs in total
- No. of parts: Max.1024 on a single Screen
- Parts for Screens:
  - Shape (Rectangle, Circle, Line, Picture)
  - Character string (Variable, fixed)
  - Lamp/switch (Bit/Word)
  - Data display
  - Gauge
  - Screen display frame
  - [Change screen] switch

## LOWER COMMUNICATION

- Modbus/TCP master
- RGP30 can connect with R3 or R7 series remote I/Os for I/O expansion and collectively handle data acquired from multiple remote measuring points.
- Modbus/TCP devices
    - R3-NE1
    - R5-NE1
    - R6-NE2
    - R7E series
    - 72EM2-M4
    - DL8
    - TR30
    - DL30
    - R30NE1

- Yokogawa FA-M3 (F3SP71-4S)

## ■ SLMP client

RGP30 can connect with SLMP-compatible MELSEC CPU units for I/O expansion and collectively handle data acquired from multiple remote measuring points.

- SLMP-compatible devices
  - MELSEC iQ-R Series CPU units
  - MELSEC iQ-F Series CPU units
  - MELSEC Q Series CPU units
- No. of slaves: 32 nodes (selectable from Modbus/TCP and SLMP devices)

## WEB SERVER

RGP30 works as a Web server and fulfils the function of display units.

- Compatible terminals and browsers
  - iPad (iOS 14.4)
  - iPhone (iOS 11): Safari
  - Android tablet (Android 10):  
Chrome 90
  - Windows PC Windows 7, 8.1, 10  
Internet Explorer 11  
Microsoft Edge 44  
Microsoft Edge 90.0  
Firefox 88.0  
Chrome 90.0
- No. of connectable terminals: 8
- Protocol
  - HTTP
  - HTTPS

Certificate can be created by using Local certification authority creator (model: LCA-RGP).

## GRAPHIC PANEL DESIGN


Create Graphic Panels using Graphic Panel Designing Software for RGP30 Series (model: RGP-Designer).

## SYSTEM CONFIGURATION EXAMPLES

■ Designing Software  
(model: RGP-Designer)

■ Field monitoring  
(Web screen)

■ Field monitoring  
(Web screen)

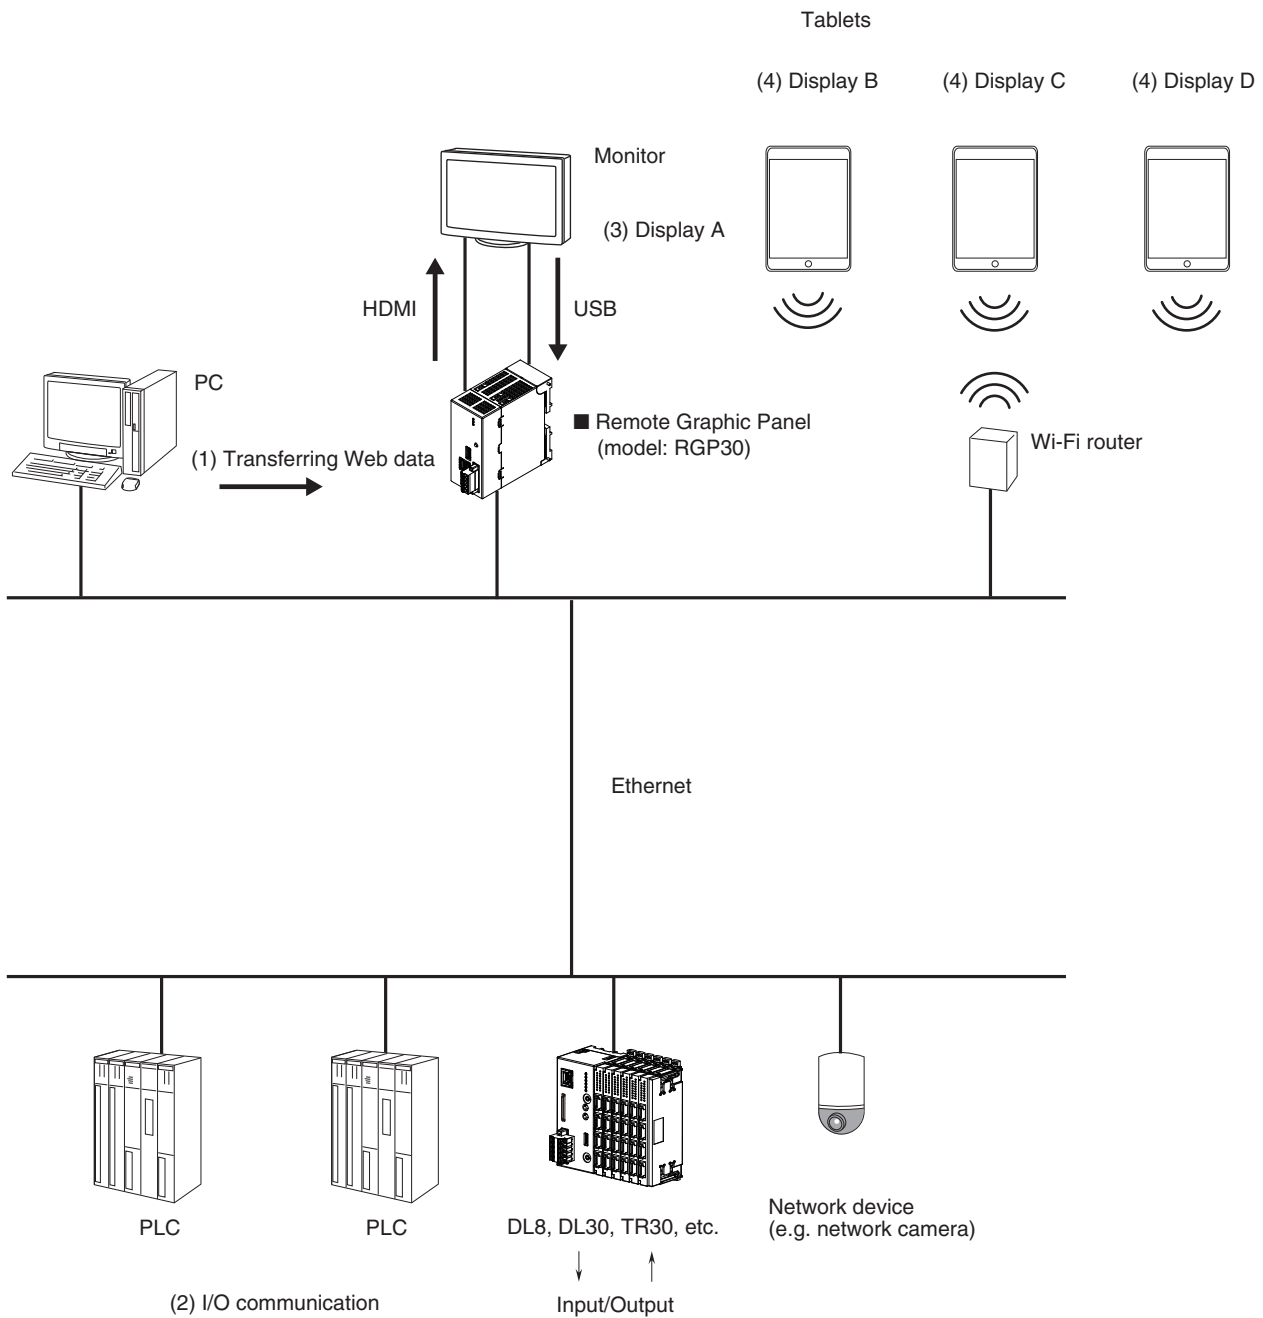

- (1) Transfer data of Graphic Panels created on RGP-Designer to the RGP unit.
- (2) Perform I/O communication with PLC over Modbus/TCP or SLMP.
- (3) Connect to the RGP Web server from browser of the RGP unit by loopback to display on an HDMI monitor. (Display unit A).
- (4) Connect to the RGP Web server from outside via the network to display on a terminal (Display units B, C, D).



Specifications are subject to change without notice.