

Space-saving Plug-in Signal Conditioners F-UNIT


DC/FREQUENCY CONVERTER

Functions & Features

- Providing a pulse rate output in proportion to DC input signal
- High-density mounting

Typical Applications

- Totalizing applications in combination with a counter

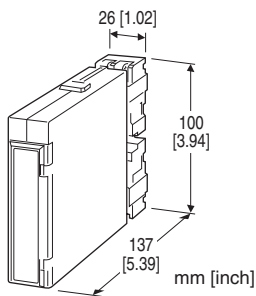

MODEL: FAP-[1][2]-[3][4]

ORDERING INFORMATION

- Code number: FAP-[1][2]-[3][4]
- Specify a code from below for each of [1] through [4].
(e.g. FAP-61-K/Q)
- Special input range (For codes Z & 0)
 - Output frequency range (e.g. 0 - 500 Hz)
 - Specify the specification for option code /Q
(e.g. /C01/S01)

[1] INPUT

Current

- A:** 4 - 20 mA DC (Input resistance 250 Ω)
- D:** 0 - 20 mA DC (Input resistance 50 Ω)
- G:** 0 - 1 mA DC (Input resistance 1000 Ω)
- H:** 10 - 50 mA DC (Input resistance 100 Ω)
- Z:** Specify current (See INPUT SPECIFICATIONS)
(0 % input must be 0 mA.)

Voltage

- 3:** 0 - 1 V DC (Input resistance 1 MΩ min.)
- 4:** 0 - 10 V DC (Input resistance 1 MΩ min.)
- 5:** 0 - 5 V DC (Input resistance 1 MΩ min.)
- 6:** 1 - 5 V DC (Input resistance 1 MΩ min.)
- 0:** Specify voltage (See INPUT SPECIFICATIONS)
(0 % input must be 0 V.)

[2] OUTPUT

- 1: Open collector (max. 1 kHz)
- 2: 5 V pulse (max. 1 kHz)
- 5: Photo MOSFET relay pulse (max. 30 Hz)

[3] POWER INPUT

AC Power

- K:** 85 - 132 V AC
(Operational voltage range 85 - 132 V, 47 - 66 Hz)
- L:** 170 - 264 V AC
(Operational voltage range 170 - 264 V, 47 - 66 Hz)

DC Power

- R:** 24 V DC
(Operational voltage range 24 V ±10 %, ripple 10 %p-p max.)
- P:** 110 V DC
(Operational voltage range 85 - 150 V, ripple 10 %p-p max.)

[4] OPTIONS

- blank:** none
- /Q:** With options (specify the specification)

SPECIFICATIONS OF OPTION: Q (multiple selections)

- COATING (For the detail, refer to our web site.)
- /C01:** Silicone coating
- /C02:** Polyurethane coating
- /C03:** Rubber coating
- TERMINAL SCREW MATERIAL
- /S01:** Stainless steel

GENERAL SPECIFICATIONS

- Construction:** Plug-in
- Connection:** M3.5 screw terminals (torque 0.8 N·m)
- Screw terminal:** Nickel-plated steel (standard) or stainless steel
- Housing material:** Flame-resistant resin (black)
- Isolation:** Input to output to power
- Zero adjustment:** 0 - 5 % (front)
- Span adjustment:** 95 to 105 % (front)

INPUT SPECIFICATIONS

- **DC Current:**
Shunt resistor attached to the input terminals (0.5 W)
Specify input resistance value for code Z.
- **DC Voltage:** 0 - 300V DC
- Minimum span:** 1V
- Input resistance:** 1 MΩ min.

OUTPUT SPECIFICATIONS

■ **Open Collector:** 30 V DC @100 mA (resistive load)
Frequency range: 0 - 10 pulses/hour through 1 kHz
Saturation voltage: 0.6 V DC

■ **5 V Pulse**

Frequency range: 0 - 10 pulses/hour through 1 kHz
Hi level: 3.0 - 5.5 V
Lo level: ≤ 0.5 V

Load resistance: 250 Ω min.

■ **Photo MOSFET Relay Pulse**

Frequency range: 0 - 10 pulses/hour through 30 Hz
Timer: Limits ON time within 75 ±25 msec.

Rating: 132 V AC @ 200 mA (cos φ = 1)

30 V DC @ 200 mA (resistive load)

ON resistance: ≤ 2 Ω

Operating humidity: 30 to 90 %RH (non-condensing)

Mounting: Surface or DIN rail; Standard Rack Mounting
 Frame BX-16H available

Weight: 190 g (0.42 lb)

PERFORMANCE in percentage of span

Accuracy: ±0.1 %

Temp. coefficient: ±0.015 %/°C (±0.008 %/°F)

Response time: Approx. 3 sec. (0 - 90 %)

Line voltage effect: ±0.1 % over voltage range

Insulation resistance: ≥ 100 MΩ with 500 V DC

Dielectric strength

Power input code R:

1000 V AC @ 1 minute (input to output)

2000 V AC @ 1 minute (input or output or power to ground)

500 V AC @ 1 minute (I/O to power)

Power input code K, L, P:

1000 V AC @ 1 minute (input to output)

2000 V AC @ 1 minute (input or output or power to ground)


1500 V AC @ 1 minute (I/O to power)

OUTPUT PULSE WIDTH


■ **Frequency less than 500 Hz at 100% input**

→ Duty ratio 20% (See the figure below)

• **Open Collector**




• **Voltage Pulse**

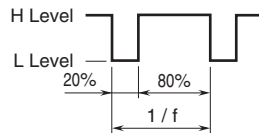


■ **Frequency greater than 500 Hz at 100% input**

→ See the figure and equation below.

• **Open Collector**



• **Voltage Pulse**




$$\text{Pulse Width [millisec.]} = \frac{1}{2.09 \times 100\% \text{ Frequency [kHz]}}$$

■ **Photo MOSFET Relay Pulse**

→ See the figure below. ON pulse width is limited within 75 ±25 msec. when the output frequency gets low (below 2 to 4 Hz).

• **Photo MOSFET Relay Pulse**



INSTALLATION

Power consumption


• **AC:** Approx. 4.5 VA

• **DC:** 24 V approx. 70 mA

110 V approx. 20 mA


Operating temperature: -5 to +55°C (23 to 131°F)

EXTERNAL DIMENSIONS unit: mm [inch]

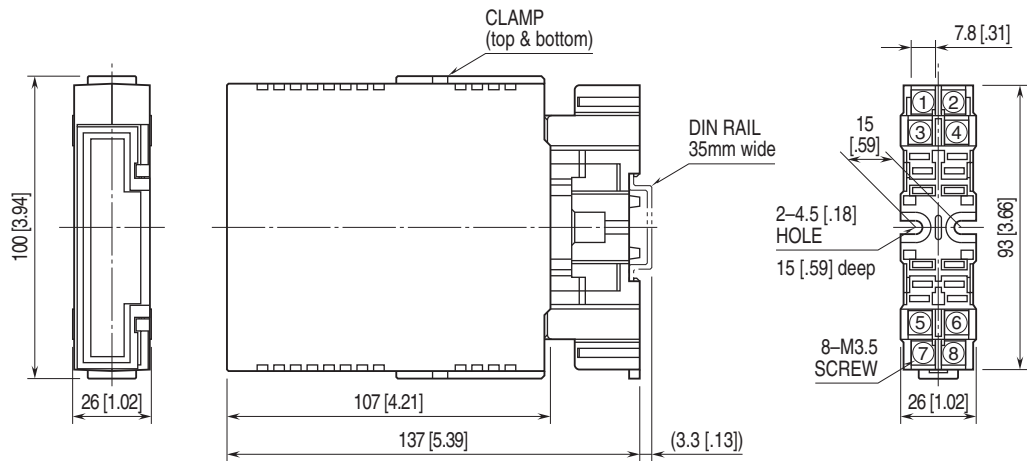


•When mounting, no extra space is needed between units.

TERMINAL ASSIGNMENTS unit: mm [inch]

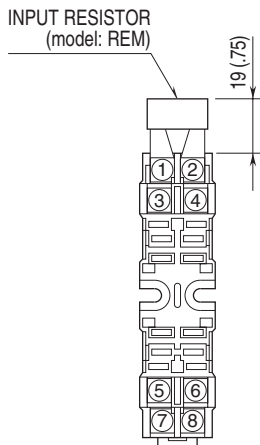

Input shunt resistor attached for current input.


SCHEMATIC CIRCUITRY & CONNECTION DIAGRAM

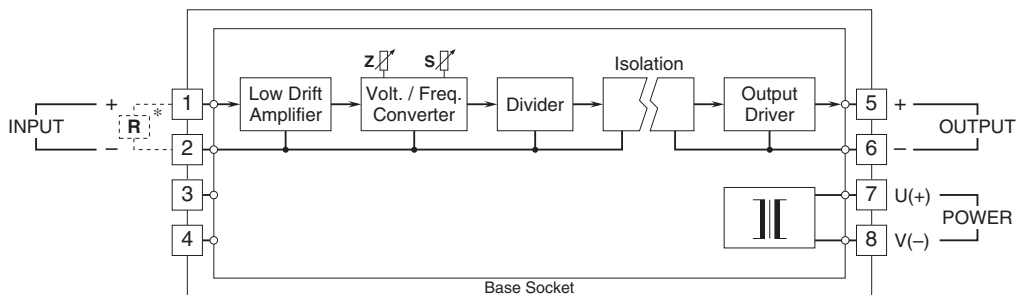


*Input shunt resistor attached for current input.

Output Connection Examples

■ **Open Collector**

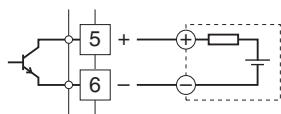


■ **Voltage Pulse**

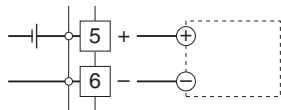


■ **Photo MOSFET Relay Pulse**

• **AC Powered**

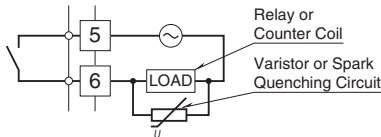

• **DC Powered**

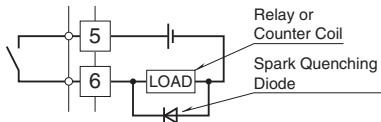

Specifications are subject to change without notice.