


## Remote I/O R3 Series

### 4 - 20 mA INPUT MODULE

(2-wire transmitter exc. supply with switch; 4 points, isolated)

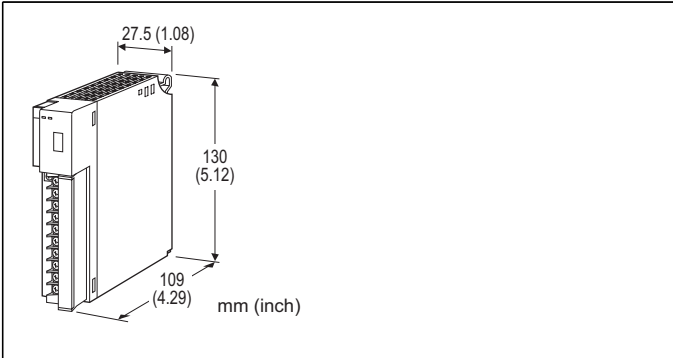

### MODEL: R3-DS4A[1][2]

#### ORDERING INFORMATION

- Code number: R3-DS4A[1][2]
- Specify a code from below for each of [1] and [2].  
(e.g. R3-DS4AW/Q)
- Specify the specification for option code /Q  
(e.g. /C01/SET)

#### NO. OF CHANNELS

4A: 4 channels, (with excitation supply switches)

#### [1] COMMUNICATION MODE

S: Single  
W: Dual

#### [2] OPTIONS

blank: none  
/Q: With options (specify the specification)

#### SPECIFICATIONS OF OPTION: Q (multiple selections)

COATING (For the detail, refer to our web site.)  
/C01: Silicone coating  
/C02: Polyurethane coating  
/C03: Rubber coating  
EX-FACTORY SETTING  
/SET: Preset according to the Ordering Information Sheet  
(No. ESU-8368)

#### GENERAL SPECIFICATIONS

##### Connection

**Internal bus:** Via the Installation Base (model: R3-BSx)  
**Input:** M3 separable screw terminal (torque 0.5 N·m)  
**Internal power:** Via the Installation Base (model: R3-BSx)  
**Screw terminal:** Nickel-plated steel  
**Isolation:** Input 1 to input 2 to input 3 to input 4 to internal bus or internal power  
**Excitation supply switches:** DIP switches (front)  
**Conversion rate:** Selectable with the side DIP SW  
**RUN indicator:** Bi-color (red/green) LED;  
Red when the bus A operates normally;  
Green when the bus B operates normally;  
Amber when both buses operate normally.  
**ERR indicator:** Bi-color (red/green) LED;  
Red with input circuit abnormality (AD converter response failure);  
Green in normal operating conditions.

#### SUPPLY OUTPUT

(across the terminals 1 - 2, 3 - 4, 6 - 7 and 8 - 9)  
**Output voltage:** 24 - 28 V DC with no load  
16 V DC min. at 22 mA  
**Current rating:** ≤ 22 mA DC  
•Shortcircuit Protection  
**Current limited:** Approx. 30 mA  
**Protected time duration:** No limit

#### INPUT SPECIFICATIONS

■ DC Current: 4 - 20 mA DC  
Input resistance: 250 Ω resistor incorporated

#### INSTALLATION

**Operating temperature:** -10 to +55°C (14 to 131°F)  
**Operating humidity:** 30 to 90 %RH (non-condensing)  
**Atmosphere:** No corrosive gas or heavy dust  
**Mounting:** Installation Base (model: R3-BSx)  
**Weight:** 250 g (0.55 lb)

## PERFORMANCE

**Conversion accuracy:** Refer to the table at the end of this section.

**Conversion rate:** 80 / 40 / 20 / 10 msec. selectable  
(factory default: 80 msec.)

**Data range:** 0 - 10000

**Data allocation:** 4

**Current consumption:** 210 mA

**Temp. coefficient:**  $\pm 0.015\% / ^\circ\text{C}$  ( $\pm 0.008\% / ^\circ\text{F}$ )

**Response time:**  $\leq 0.2$  sec. (0 - 90 %)

**Insulation resistance:**  $\geq 100\ \text{M}\Omega$  with 500 V DC

**Dielectric strength:** 1500 V AC @ 1 minute (input 1 to input 2 to input 3 to input 4 to internal bus or internal power)


2000 V AC @ 1 minute (power input to FG; isolated on the power supply module)

**Conversion accuracy:**


RATE	80 msec.	40 msec.	20 msec.	10 msec.
Accuracy	$\pm 0.05\%$	$\pm 0.1\%$	$\pm 0.2\%$	$\pm 0.4\%$

## EXTERNAL VIEW

### FRONT VIEW

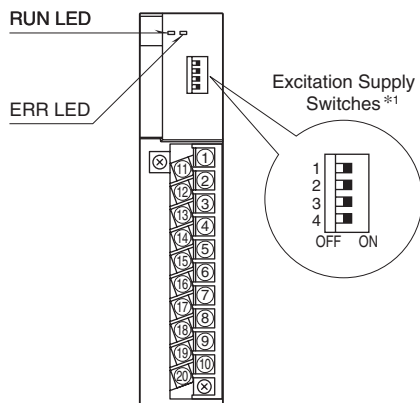


### SIDE VIEW

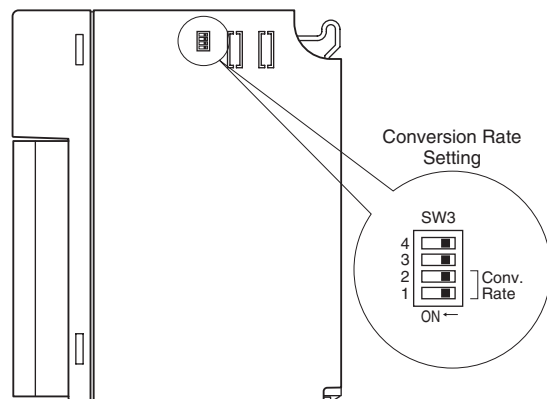


\*1. Excitation supply switches 1 through 4 turn on (ON) or off (OFF) the power supply to the input 1 through 4 respectively.  
(Factory set to ON)

**EXTERNAL DIMENSIONS & TERMINAL ASSIGNMENTS** unit: mm [inch]

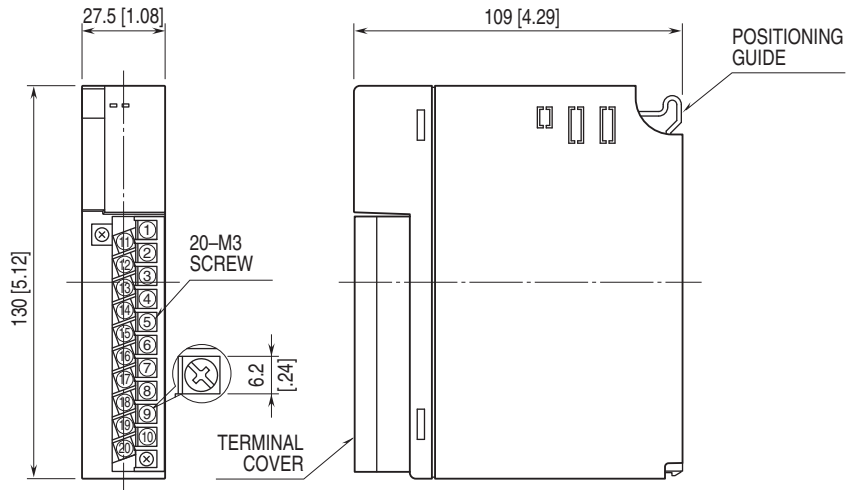


**SCHEMATIC CIRCUITRY & CONNECTION DIAGRAM**

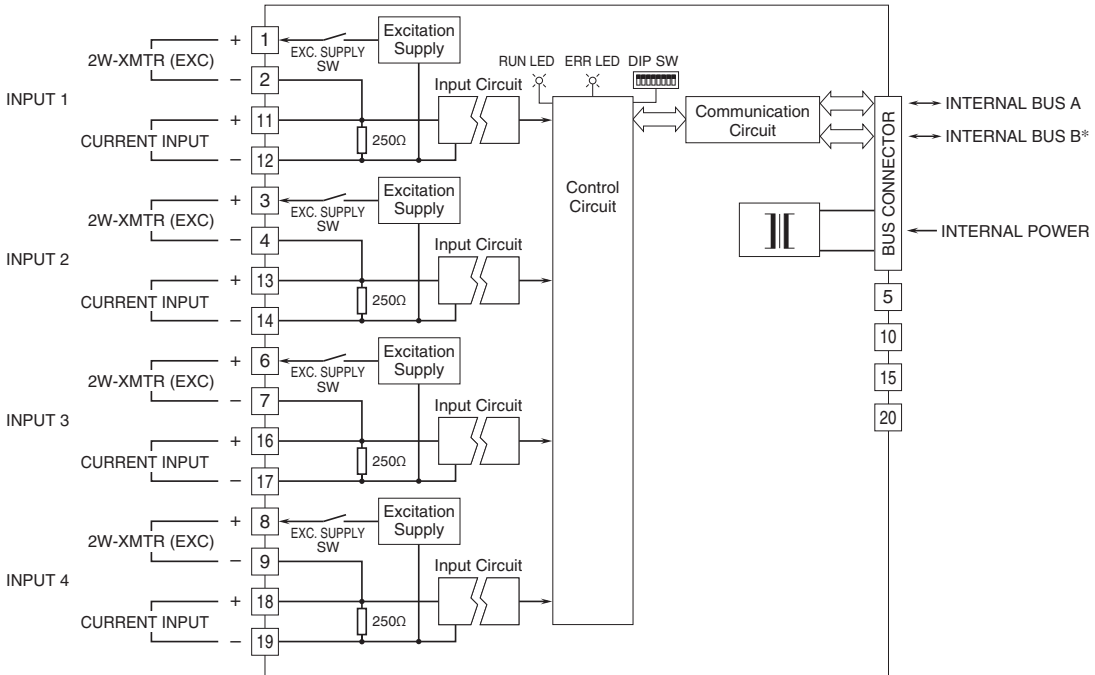

\*For dual redundant communication.

**• Unused Input Channels**  
 Turn on the excitation supply switch for the unused channels and close across the unused input terminals with a resistor (5 kΩ, 0.5W) as shown below.



Unused channels left open are equal to the input lower than -15%, which sets a data abnormality at the PLC or the host device.  
 Unused channels can be specified and set so on the PC Configurator Software (model: R3CON) without needing to connect resistors at the field terminals.



Specifications are subject to change without notice.