

CABLE (with FCN connectors)

(40-pin to 40-pin, shielded)

MODEL: FCN-[1]

ORDERING INFORMATION

- Code number: FCN-[1]

Specify a code from below for [1].

(e.g. FCN-10)

[1] CABLE LENGTH

00: Connector × 2 (without cable)

03: Cable with connectors at both ends L = 30 cm (11.8 in.)

05: Cable with connectors at both ends L = 50 cm (1.6 ft.)

10: Cable with connectors at both ends L = 1 m (3.3 ft.)

20: Cable with connectors at both ends L = 2 m (6.6 ft.)

RELATED PRODUCTS

- Connector terminal block (model: CNT)

GENERAL SPECIFICATIONS

Connector model: OTAX N361J040AJ

(Fujitsu FCN-361J040-AJ...discontinued)

Cover model: OTAX N360C040B

(Fujitsu FCN-360C040-B...discontinued)

Cable: Shielded cable with 40 core cables

INSTALLATION

Weight

FCN-00: 60 g (0.13 lb)

FCN-03: 110 g (0.24 lb)

FCN-05: 140 g (0.31 lb)

FCN-10: 210 g (0.46 lb)


FCN-20: 340 g (0.75 lb)

PERFORMANCE


Maximum current: 0.2 A

Dielectric strength: 500 V AC @ 1 minute

EXTERNAL DIMENSIONS & CONNECTOR PIN ASSIGNMENT unit: mm (inch)

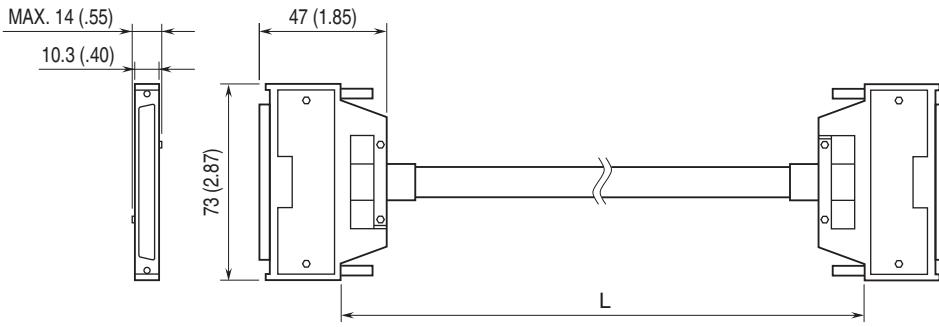

■ PIN ASSIGNMENT



MODEL	FCN-03	FCN-05	FCN-10	FCN-20
L	30 cm (11.81")	50 cm (19.69")	1 m (39.37")	2 m (78.74")



Specifications are subject to change without notice.