

Remote I/O R7F4D Series


HI-SPEED LINK SYSTEM I/O MODULE

(NPN discrete input & PNP transistor output, 16 points each, MIL connector (type 2))

Functions & Features

- 16 points NPN discrete input & 16 points PNP transistor output module for HLS

HLS is the abbreviation for “Hi-speed Link System” of Step Technica Co., Ltd.

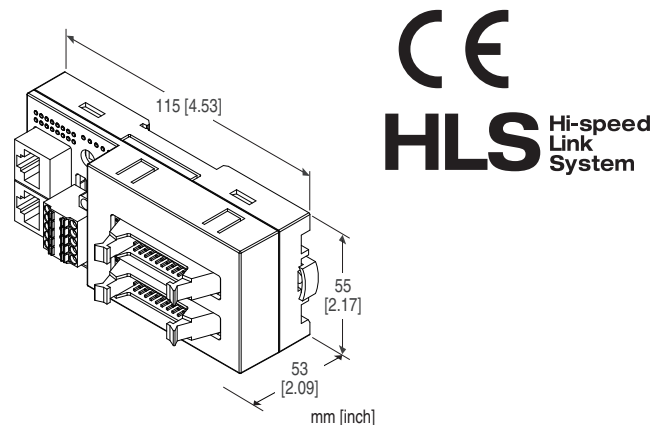

MODEL: R7F4DH-3-DAC32B-R[1]

ORDERING INFORMATION

- Code number: R7F4DH-3-DAC32B-R[1]
Specify a code from below for [1].
(e.g. R7F4DH-3-DAC32B-R/H/Q)
- Specify the specification for option code /Q
(e.g. /C01)

TERMINAL BLOCK

- 3: Tension clamp terminal block for power supply
- RJ-45 Modular jack for communication
- MIL connector (type 2) for I/O

I/O TYPE

DAC32B: NPN discrete input & PNP transistor output, 16 points each

POWER INPUT

DC Power

R: 24 V DC

(Operational voltage range 24 V $\pm$ 10 %, ripple 10 %p-p max.)

[1] OPTIONS (multiple selections)

Communication Mode

blank: Full-duplex

/H: Half-duplex

Other Options

blank: none

/Q: Option other than the above (specify the specification)

SPECIFICATIONS OF OPTION: Q

COATING (For the detail, refer to our web site.)

/C01: Silicone coating

/C02: Polyurethane coating

/C03: Rubber coating

GENERAL SPECIFICATIONS

Connection

HLS: RJ-45 Modular Jack

Power & Sensor excitation: Separable screwless spring terminal

I/O: MIL connector

Housing material: Flame-resistant resin (gray)

Isolation: Input or output or sensor excitation to HLS or power to FE

Output at the loss of communication:

Hold the output (*), Reset the output

Selectable with the front DIP SW

(*) Factory default setting

Status indicator LED: Power (green) turns on while the power is supplied.

Discrete I/O status indicator LED: Red LED turns on with I/O ON (Input or output display is selected with slide SW; factory default setting: input display)

HLS COMMUNICATION

Communication mode: Full-duplex or half-duplex

Network cable

Shielded cable:

Full-duplex communication:

ZHY262PS and ZHT262PS (Shinko Seisen Industry Co., Ltd.)

Half-duplex communication:

ZHY221PS (Shinko Seisen Industry Co., Ltd.)

Dual shielded cable:

ZHY262PBA (Shinko Seisen Industry Co., Ltd.)

Transmission distance:

12 Mbps: 100 meters (328 ft)

6 Mbps: 200 meters (656 ft)

3 Mbps: 300 meters (984 ft)

(Configurable with DIP SW; factory setting: 12 Mbps)

Data allocation: 1

Terminating resistor: Built-in (Selected with the DIP SW; factory setting: disabled)

Status indicator LED: Run LED on in normal communication
Station address: Set with rotary switch
(Refer to the instruction manual for details)

INPUT SPECIFICATIONS

Common: Positive common (NPN) per 16 points
Numbers of input: 16 points
Maximum inputs applicable at once: No limit (at 24V DC)
Sensor excitation: 24 V DC $\pm 10\%$; ripple 5 %p-p max.,
 ≤ 2 A (including discrete input load charge); rated current 8 A
ON voltage / current: ≥ 15 V DC (X0 through XF to +24V) /
 ≥ 3.5 mA
OFF voltage / current: ≤ 5 V DC (X0 through XF to +24V) / ≤ 1 mA
Input current: ≤ 5.5 mA per point at 24 V DC
Input resistance: Approx. 4.4 k Ω
ON delay: ≤ 0.5 msec.
OFF delay: ≤ 0.5 msec.

OUTPUT SPECIFICATIONS

Common: Positive common (PNP) per 16 points
Number of output: 16 points
Maximum outputs applicable at once: No limit (at 24 V DC)
Sensor excitation: 24 V DC $\pm 10\%$, ripple 5 %p-p max.,
 ≤ 2 A (including discrete output load charge); rated current 8 A
Rated output current: 0.1 A per point, 1.6 A per common
Residual voltage: ≤ 1.2 V
Leakage current: ≤ 0.1 mA
ON delay: ≤ 0.2 msec.
OFF delay: ≤ 0.5 msec.
Overload current protection function: Limits the current value when overcurrent is detected
Overheat protection function: Turns OFF the outputs when overheat is detected
(When driving an inductive load, connect a diode in parallel with the load.)

INSTALLATION

Current consumption
•DC: Approx. 40 mA (rated current 8 A)
(contact I/O load charge is not included)
Operating temperature: -10 to +55°C (14 to 131°F)
Operating humidity: 30 to 90 %RH (non-condensing)
Atmosphere: No corrosive gas or heavy dust
Mounting: Surface or DIN rail (35 mm rail)
Weight: 120 g (0.26 lb)

PERFORMANCE

Insulation resistance: ≥ 100 M Ω with 500 V DC
Dielectric strength: 1500 V AC @ 1 minute (input or output or sensor excitation to HLS to power to FE)

STANDARDS & APPROVALS

Refer to the manuals to comply with the standards.

EU conformity:


EMC Directive

EMI EN 61000-6-4

EMS EN 61000-6-2

RoHS Directive

EXTERNAL VIEW

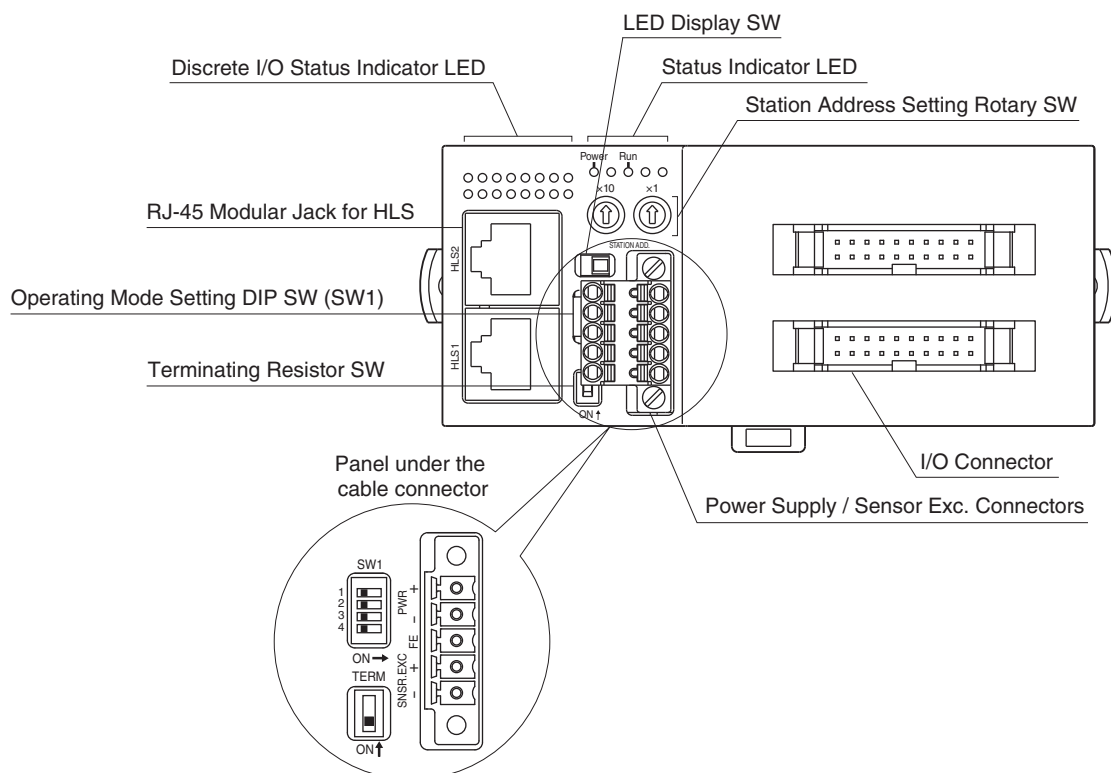


TERMINAL ASSIGNMENTS**■ I/O TERMINAL ASSIGNMENT**

- MIL connector

Recommended cable connector: XG4M-2030 (Omron)

(The cable connector is not included in the package)

**• CN1**

PIN No.	ID	FUNCTION	PIN No.	ID	FUNCTION
1	+24V	24V DC	11	XC	INPUT 12
2	+24V	24V DC	12	X4	INPUT 4
3	GND	0V	13	XB	INPUT 11
4	GND	0V	14	X3	INPUT 3
5	XF	INPUT 15	15	XA	INPUT 10
6	X7	INPUT 7	16	X2	INPUT 2
7	XE	INPUT 14	17	X9	INPUT 9
8	X6	INPUT 6	18	X1	INPUT 1
9	XD	INPUT 13	19	X8	INPUT 8
10	X5	INPUT 5	20	X0	INPUT 0

• CN2

PIN No.	ID	FUNCTION	PIN No.	ID	FUNCTION
1	+24V	24V DC	11	YC	OUTPUT 12
2	+24V	24V DC	12	Y4	OUTPUT 4
3	GND	0V	13	YB	OUTPUT 11
4	GND	0V	14	Y3	OUTPUT 3
5	YF	OUTPUT 15	15	YA	OUTPUT 10
6	Y7	OUTPUT 7	16	Y2	OUTPUT 2
7	YE	OUTPUT 14	17	Y9	OUTPUT 9
8	Y6	OUTPUT 6	18	Y1	OUTPUT 1
9	YD	OUTPUT 13	19	Y8	OUTPUT 8
10	Y5	OUTPUT 5	20	Y0	OUTPUT 0

■ POWER SUPPLY, SENSOR EXCITATION


Cable connector: TFMC1,5 / 5-STF-3,5

(Phoenix Contact) (included in the package)

Applicable wire size: 0.2 – 1.5 mm²; stripped length 10 mm

Recommended solderless terminal

- AI0,25–10YE 0.25 mm² (Phoenix Contact)
- AI0,34–10TQ 0.34 mm² (Phoenix Contact)
- AI0,5–10WH 0.5 mm² (Phoenix Contact)
- AI0,75–10GY 0.75 mm² (Phoenix Contact)
- A1–10 1.0 mm² (Phoenix Contact)
- A1,5–10 1.5 mm² (Phoenix Contact)




1. PWR+ Power Supply
2. PWR– Power Supply
3. FE Functional earth
4. SNSR.EXC+ Sensor excitation
5. SNSR.EXC– Sensor excitation

Note: The numbers marked on the connector have no relationship to the pin number of the unit.
Wire according to the instruction manual of the unit.

■ HLS


Recommended cable connector: TM21P-88P (Hirose Electric)
(not included in the package)

• Full-duplex communication



- | | |
|---------|----------------------------------|
| 1. NC | Unused |
| 2. NC | Unused |
| 3. TXD+ | Network (slave, transmission +) |
| 4. TXD- | Network (slave, transmission -) |
| 5. RXD+ | Network (master, transmission +) |
| 6. RXD- | Network (master, transmission -) |
| 7. NC | Unused |
| 8. SLD | Shield |


• Half-duplex communication




- | | |
|--------|-------------|
| 1. NC | Unused |
| 2. NC | Unused |
| 3. TR+ | Network (+) |
| 4. TR- | Network (-) |
| 5. NC | Unused |
| 6. NC | Unused |
| 7. NC | Unused |
| 8. SLD | Shield |

■ MASTER CONNECTION

• Full-duplex communication

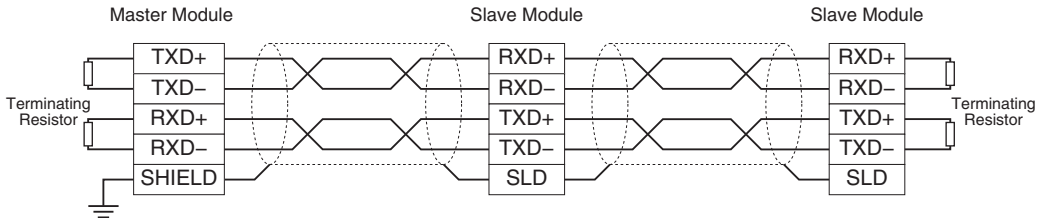

• Half-duplex communication

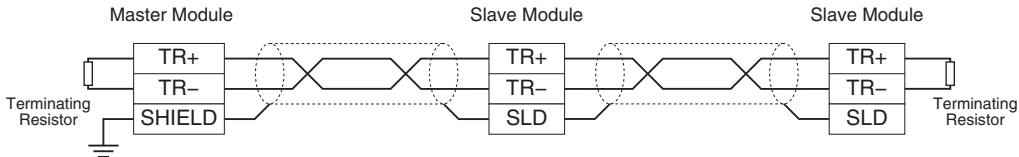


Note: Be sure to turn ON the switch of the terminating resistor located at both ends of the modules.


I/O DATA DESCRIPTIONS

■ DISCRETE I/O

• Di

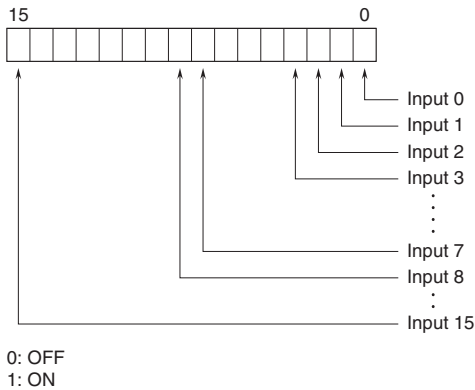


• Do

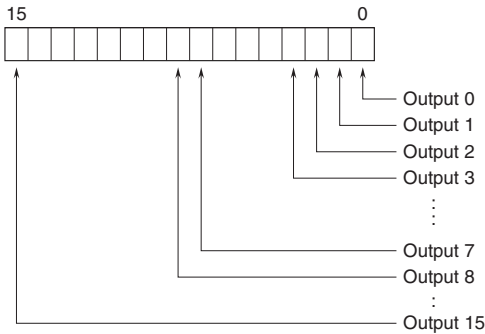


MODEL: R7F4DH-3-DAC32B

EXTERNAL DIMENSIONS unit: mm [inch]

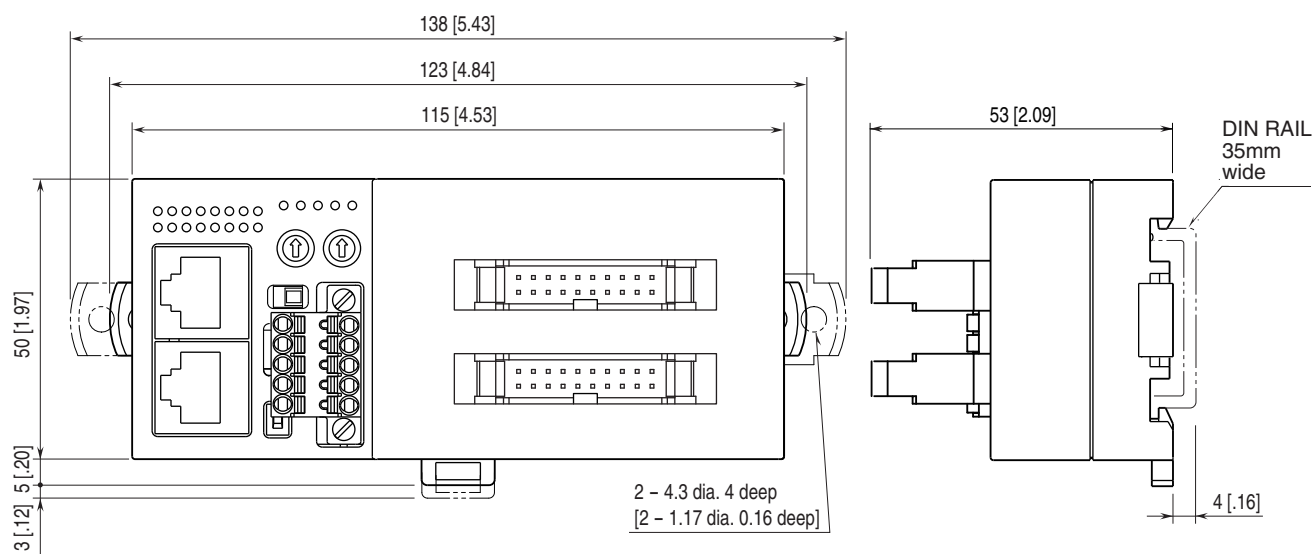


MOUNTING REQUIREMENTS unit: mm [inch]

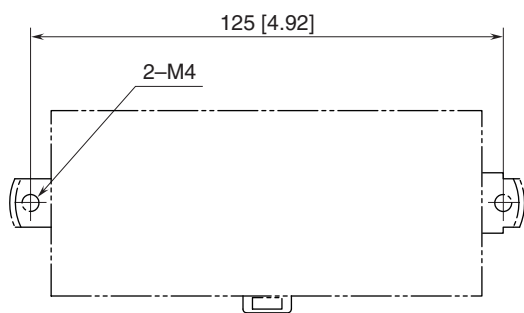

SCHEMATIC CIRCUITRY & CONNECTION DIAGRAM

Note: In order to improve EMC performance, bond the FE terminal to ground.

Caution: FE terminal is NOT a protective conductor terminal.

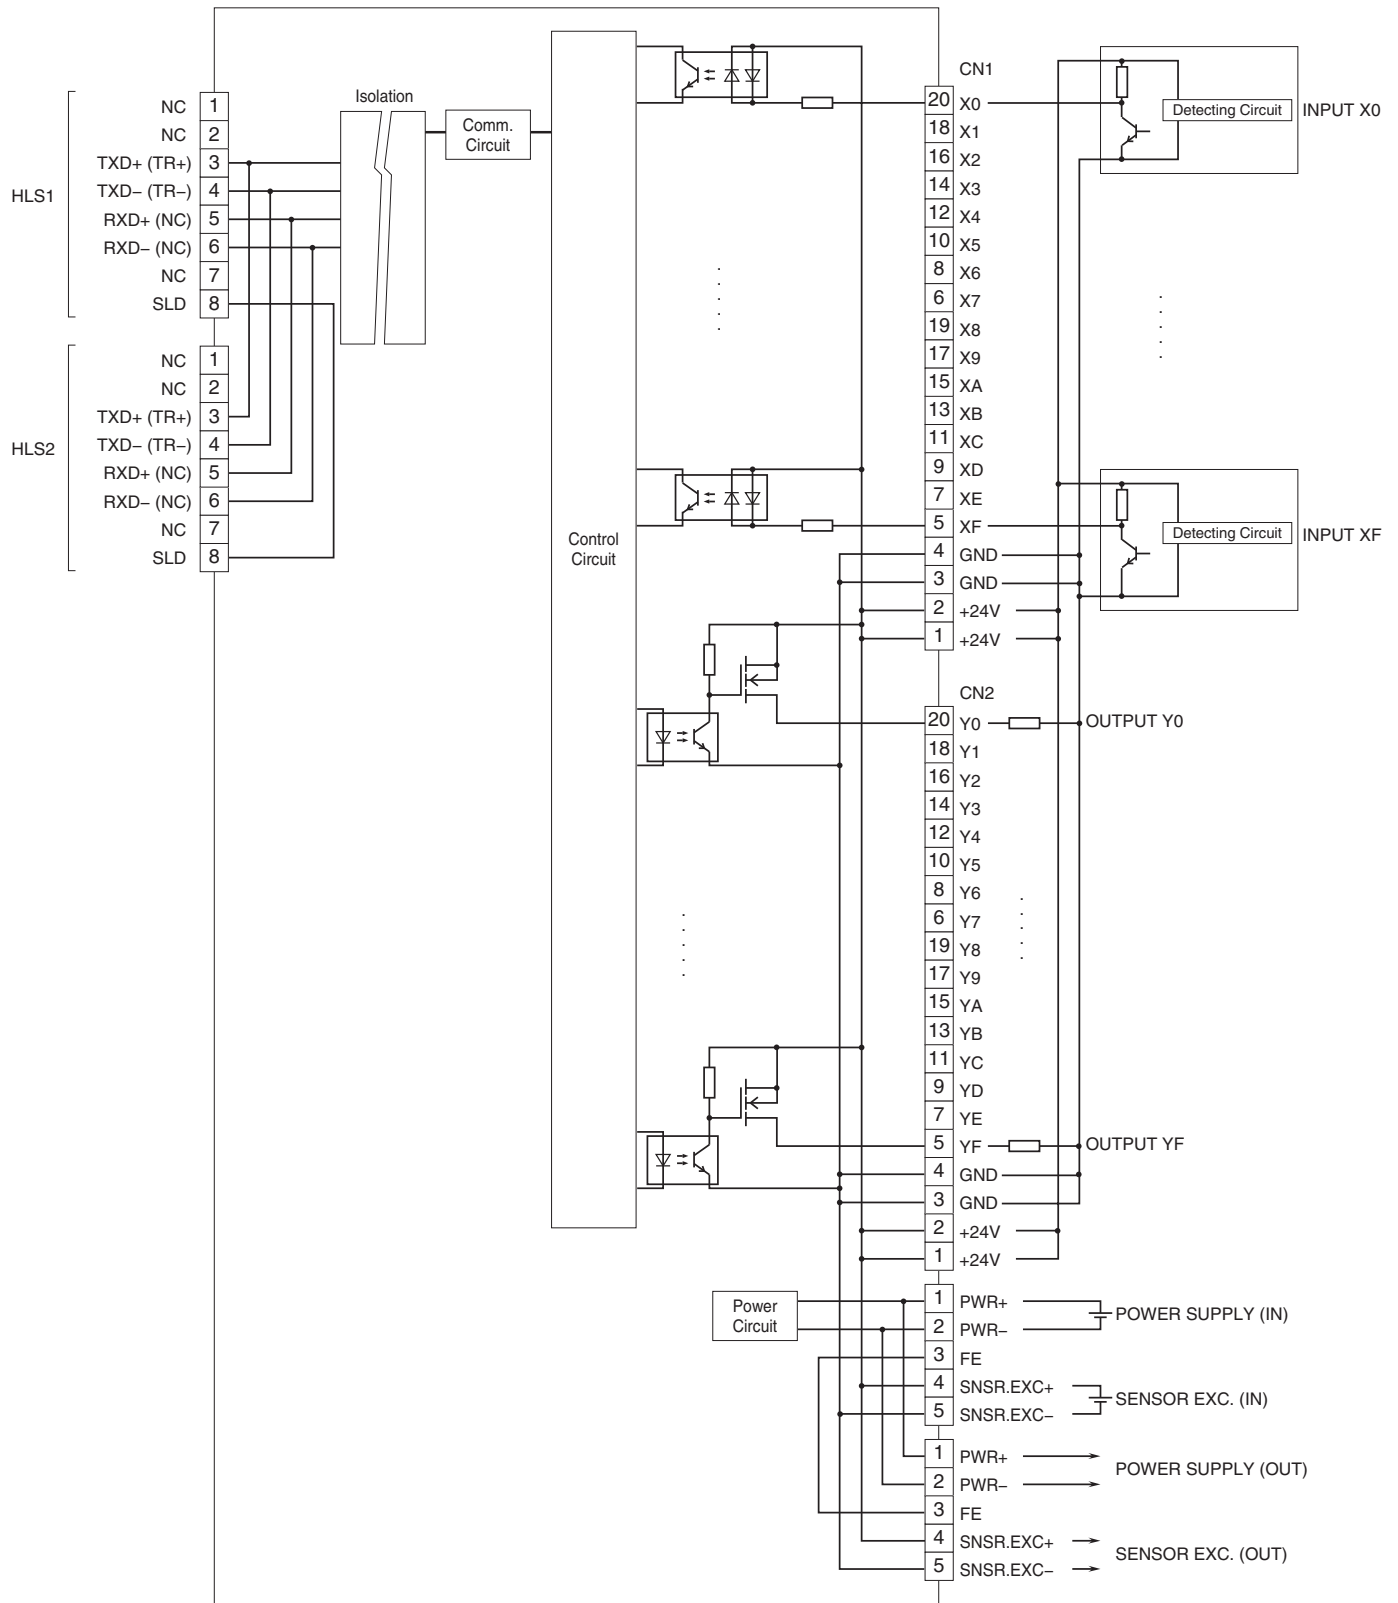



Specifications are subject to change without notice.