


Remote I/O R7F4HEIP Series

EtherNet/IP I/O MODULE

(PNP discrete input, 32 points, tension clamp terminal block)

Functions & Features

- 32 points PNP discrete input module for EtherNet/IP
- Supports DLR (Device Level Ring) to form a ring topology

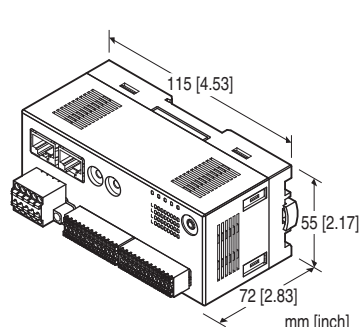

MODEL: R7F4HEIP-DA32B-4-R[1]

ORDERING INFORMATION

- Code number: R7F4HEIP-DA32B-4-R[1]
Specify a code from below for [1].
(e.g. R7F4HEIP-DA32B-4-R/Q)
- Specify the specification for option code /Q
(e.g. /C01)

I/O TYPE

DA32B: PNP discrete input, 32 points

TERMINAL BLOCK

- 4: Tension clamp terminal block for power supply
- RJ-45 Modular jack for communication
- Tension clamp terminal block for I/O
(applicable wire size: 0.14 - 0.5mm²)

POWER INPUT

DC power

R: 24 V DC

(Operational voltage range: $\pm 10\%$; ripple 10 %p-p max.)

[1] OPTIONS

blank: none

/Q: With options (specify the specification)

SPECIFICATIONS OF OPTION: Q

COATING (For the detail, refer to our web site.)

/C01: Silicone coating

/C02: Polyurethane coating

/C03: Rubber coating

RELATED PRODUCTS

- PC Configurator cable (model: MCN-CON or COP-US)
- PC configurator software (model: R7CFG)
- EDS file

The EDS files and configurator software are downloadable at our web site.

GENERAL SPECIFICATIONS

Connection

EtherNet/IP: RJ-45 Modular Jack

Power supply, exc. supply, input: Tension clamp terminal

Housing material: Flame-resistant resin (gray)

Isolation: Input or exc. supply to EtherNet/IP or FE to power

Status indicator LED: PWR, LNK1, LNK2

(Refer to the instruction manual)

Discrete input status indicator LED: Green LED turns on with input ON

Read rate: Selectable with R7CFG

EtherNet/IP COMMUNICATION

Communication Standard: IEEE 802.3u

Transmission: 10BASE-T, 100BASE-TX

Baud rate: 10/100 Mbps (Auto Negotiation function)

Protocol: EtherNet/IP

Max. number of socket connections: 3

Connection type: Exclusive owner / Listen only / Input only

Transmission media: 10BASE-T (STP, Category 5), 100BASE-TX (STP, Category 5e)

Network topology: Line, star and ring

Max. length of fieldbus segment: 100 meters

IP address: 192.168.0.250 (factory setting);

Only host address in IP address is configurable via rotary switches, the other items via PC configurator software (model: R7CFG)

DLR supported

Port No.: 2222, 44818

I/O data size: Two (2) words

Status indicator LEDs: MS, NS (Refer to the instruction manual for details)

INPUT SPECIFICATIONS

Common: Negative common (PNP), 16 points per common

Numbers of input: 32

Maximum inputs applicable at once: No limit (at 24 V DC)

Sensor excitation: 24 V DC $\pm 10\%$; ripple 5 %p-p max.,
 ≤ 2 A (including discrete input load charge)

ON voltage / current: ≥ 17 V DC (X0 to X31 input terminal to GND) / ≥ 2.3 mA

OFF voltage / current: ≤ 5 V DC (X0 to X31 input terminal to GND) / ≤ 0.75 mA

Input current: ≤ 3.5 mA per point at 24 V DC

Input resistance: Approx. 7.2 k Ω

ON delay: ≤ 0.2 msec.

OFF delay: ≤ 0.5 msec.

INSTALLATION

Current consumption

•DC: Approx. 75 mA

(contact I/O load charge is not included)

Operating temperature: -10 to +55°C (14 to 131°F)

Storage temperature: -20 to +65°C (-4 to +149°F)

Operating humidity: 30 to 90 %RH (non-condensing)

Atmosphere: No corrosive gas or heavy dust

Mounting: Surface or DIN rail (35 mm rail)

Weight: 170 g (0.37 lb)

PERFORMANCE

Insulation resistance: ≥ 100 M Ω with 500 V DC

Dielectric strength: 1500 V AC @ 1 minute

(input or exc. supply to EtherNet/IP or FE to power)

STANDARDS & APPROVALS

EU conformity:

EMC Directive

EMI EN 61000-6-4

EMS EN 61000-6-2

RoHS Directive

PC CONFIGURATOR

The following parameters can be set with using PC Configurator Software (model: R7CFG)

Refer to the users manual for the R7CFG for detailed operation of the software program.


■ CHANNEL BATCH SETTING

PARAMETER	SETTING RANGE	DEFAULT
Conversion rate	1ms, 5ms, 10ms, 20ms, 50ms, 70ms, 100ms, 200ms	10ms

■ ETHERNET SETTING

PARAMETER	SETTING RANGE	DEFAULT
IP Address	0.0.0.0 - 255.255.255.255	192.168.0.250
Subnet Mask	0.0.0.0 - 255.255.255.255	255.255.255.0
Default Gateway	0.0.0.0 - 255.255.255.255	192.168.0.1
TimeOut	0 - 32767 (0.1 sec.)	30 (0.1 sec.)

EXTERNAL VIEW

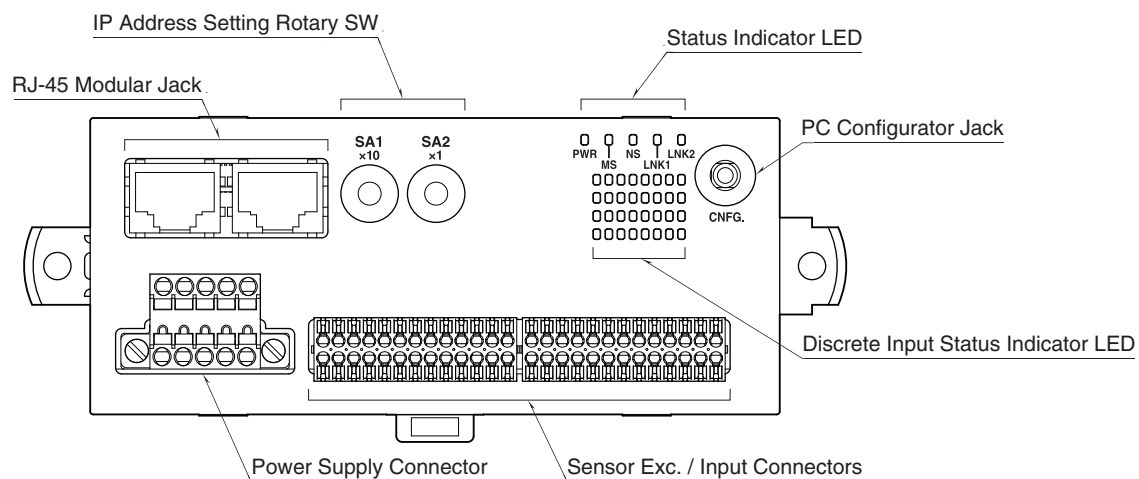

TERMINAL ASSIGNMENTS**■ SENSOR EXC. / INPUT CONNECTION**


Applicable connector: DFMC0,5/13-ST-2,54 (Phoenix Contact) (included in the package)

Applicable wire size: 0.14 - 0.5mm², stripped length 7mm

Recommended solderless terminal:

- AI0,14-6GY 0.14mm² (Phoenix Contact)
- AI0,14-8GY 0.14mm² (Phoenix Contact)
- AI0,25-6YE 0.25mm² (Phoenix Contact)
- AI0,25-8YE 0.25mm² (Phoenix Contact)
- A0,25-7 0.25mm² (Phoenix Contact)
- A0,34-7 0.34mm² (Phoenix Contact)

Note: If the stripped length does not match the length of recommended solderless terminal, adjust to the stripped length of 7mm by cutting the terminal if it is too long, or by extending the wire if the terminal is too short.

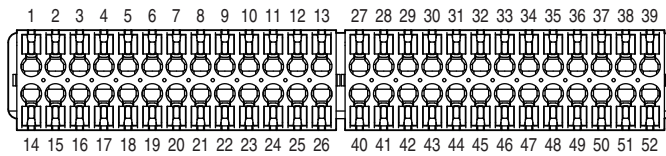

PIN No.	ID	FUNCTION
1	+24V1	24V DC
2	X0	Input 0
3	X2	Input 2
4	+24V1	24V DC
5	X4	Input 4
6	X6	Input 6
7	+24V1	24V DC
8	X8	Input 8
9	X10	Input 10
10	+24V1	24V DC
11	X12	Input 12
12	X14	Input 14
13	+24V1	24V DC

PIN No.	ID	FUNCTION
14	GND1	0V
15	X1	Input 1
16	X3	Input 3
17	GND1	0V
18	X5	Input 5
19	X7	Input 7
20	GND1	0V
21	X9	Input 9
22	X11	Input 11
23	GND1	0V
24	X13	Input 13
25	X15	Input 15
26	GND1	0V

PIN No.	ID	FUNCTION
27	+24V2	24V DC
28	X16	Input 16
29	X18	Input 18
30	+24V2	24V DC
31	X20	Input 20
32	X22	Input 22
33	+24V2	24V DC
34	X24	Input 24
35	X26	Input 26
36	+24V2	24V DC
37	X28	Input 28
38	X30	Input 30
39	+24V2	24V DC

PIN No.	ID	FUNCTION
40	GND2	0V
41	X17	Input 17
42	X19	Input 19
43	GND2	0V
44	X21	Input 21
45	X23	Input 23
46	GND2	0V
47	X25	Input 25
48	X27	Input 27
49	GND2	0V
50	X29	Input 29
51	X31	Input 31
52	GND2	0V


■ POWER SUPPLY TERMINAL ASSIGNMENT

Applicable connector: TFMC1,5 / 5-STF-3,5(Phoenix Contact)
(included in the package)

Applicable wire size: 0.2 – 1.5 mm²; stripped length 10 mm

Recommended solderless terminal


- AI0,25-10YE 0.25 mm² (Phoenix Contact)
- AI0,34-10TQ 0.34 mm² (Phoenix Contact)
- AI0,5-10WH 0.5 mm² (Phoenix Contact)
- AI0,75-10GY 0.75 mm² (Phoenix Contact)
- A1-10 1.0 mm² (Phoenix Contact)
- A1,5-10 1.5 mm² (Phoenix Contact)




- | | |
|---------|----------------------|
| 1. FE | Functional Earth |
| 2. NC | — |
| 3. NC | — |
| 4. +24V | Power Input (24V DC) |
| 5. 0V | Power Input (0V) |

I/O DATA DESCRIPTIONS


■ DISCRETE INPUT

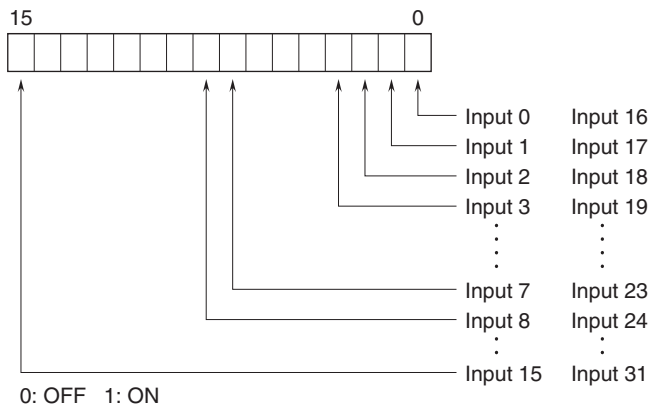

EXTERNAL DIMENSIONS unit: mm [inch]

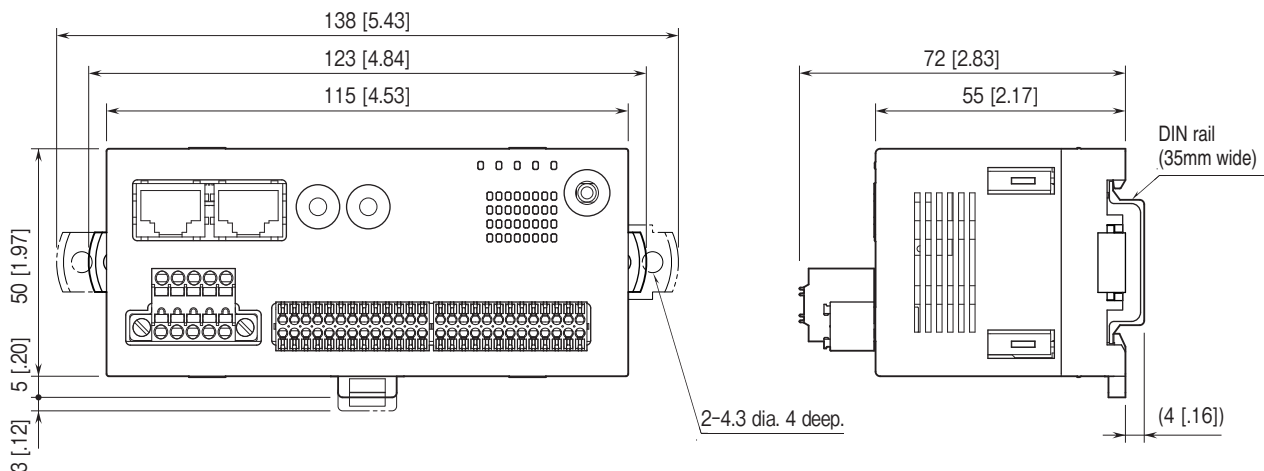


MOUNTING REQUIREMENTS unit: mm [inch]

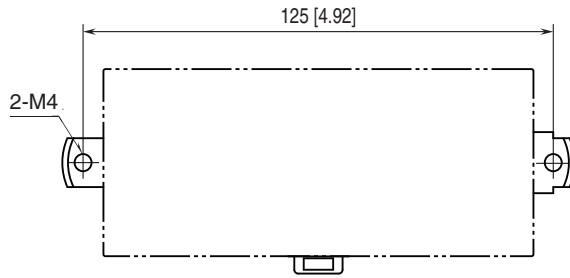

SCHEMATIC CIRCUITRY & CONNECTION DIAGRAM

Note: In order to improve EMC performance, bond the FE terminal to ground.

Caution: FE terminal is NOT a protective conductor terminal.

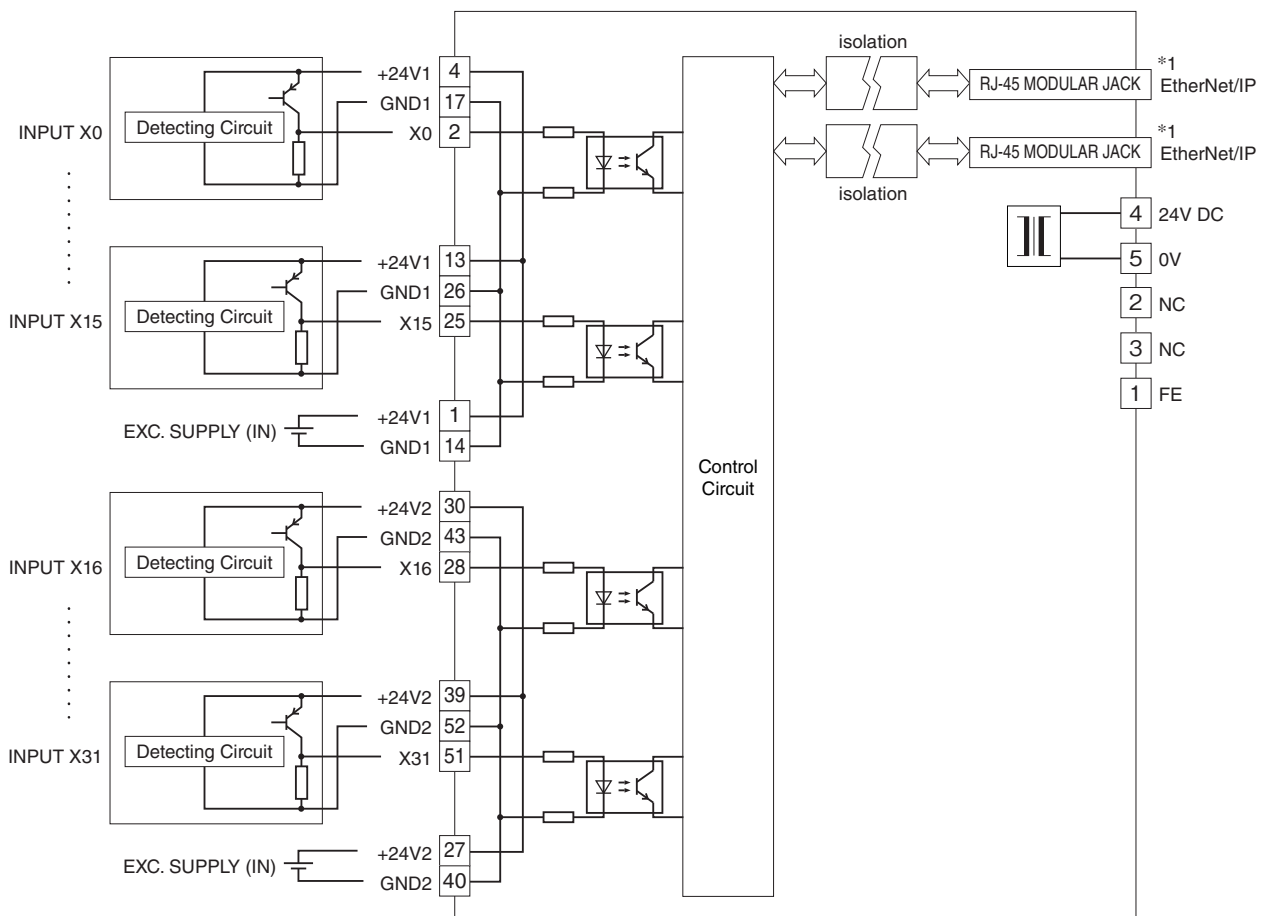

*1. The network cable can be connected to either one.



Specifications are subject to change without notice.