

Space-saving Plug-in Signal Conditioners H-UNIT

(Operational voltage range 24 V $\pm$ 10 %, ripple 10 %p-p max.)


PULSE ISOLATOR

Functions & Features

- Galvanically isolating pulse rate signals
- Input frequency = output frequency
- Various outputs (open collector, voltage pulses and photo MOSFET relay pulse)
- High-density mounting

Typical Applications

- Isolating field pulse signals in order to reduce noises
- Changing e.g. dry contact signal to e.g. 5 V signals



[3] OPTIONS

blank: none

/Q: With options (specify the specification)

SPECIFICATIONS OF OPTION: Q (multiple selections)

COATING (For the detail, refer to our web site.)

/C01: Silicone coating

/C02: Polyurethane coating

/C03: Rubber coating

TERMINAL SCREW MATERIAL

/S01: Stainless steel

GENERAL SPECIFICATIONS

Construction: Plug-in

Connection: M3.5 screw terminals (torque 0.8 N·m)

Screw terminal: Nickel-plated steel (standard) or stainless steel

Housing material: Flame-resistant resin (black)

Isolation: Input to output to power

Frequency range: Input and output are the same.

Chattering protection: Filter provided for mechanical contact input

MODEL: HPP-[1][2]-R[3]

ORDERING INFORMATION

- Code number: HPP-[1][2]-R[3]
- Specify a code from below for each of [1] through [3].
(e.g. HPP-33-R/Q)
- Specify the specification for option code /Q
(e.g. /C01/S01)

[1] INPUT

- 1: Mechanical contact (max. 30 Hz)
- 2: Open collector (max. 10 kHz)
- 3: Voltage pulse (max. 10 kHz)

[2] OUTPUT

- 1: Low frequency open collector (max. 30 Hz)
- 2: High frequency open collector (max. 10 kHz)
- 3: 5 V pulse (max. 10 kHz)
- 4: 12 V pulse (max. 10 kHz)
- 5: 24 V pulse (max. 10 kHz)
- 8: Photo MOSFET relay pulse (max. 30 Hz)

POWER INPUT

DC Power

R: 24 V DC

INPUT SPECIFICATIONS

Excitation: 12V DC $\pm$ 2 V @ 30 mA; shortcircuit protection

■ Open Collector

Maximum frequency: 10 kHz

Pulse width time requirement: 10 μ sec. min. for ON and OFF

Sensing: Approx. 12 V DC @3 mA

ON/OFF level: $\leq$ 200 Ω / 0.6 V for ON, $\geq$ 100 k Ω / 6 V for OFF

■ Mechanical Contact

Maximum frequency: 30 Hz

Pulse width time requirement: 10 msec. min. for ON and OFF

Sensing: Approx. 12 V DC @3 mA

ON/OFF level: $\leq$ 200 Ω / 0.6 V for ON, $\geq$ 100 k Ω / 6 V for OFF

■ Voltage Pulse

Maximum frequency: 10 kHz

Pulse width time requirement: 10 μ sec. min. for high and low levels

Waveforms: Square or sine

Hi/Lo level: 2 - 50 V DC for high level; $\leq$ 1 V DC for low level

Input impedance: 10 k Ω min.

OUTPUT SPECIFICATIONS

■ Low Frequency Open Collector

50 V DC @ 100 mA (resistive load)

Maximum frequency: 30 Hz

Timer: Limits ON time within 75 $\pm$ 25 msec. for wider than 75 msec. pulses

Saturation voltage: 0.5 V DC

■ **High Frequency Open Collector**

50 V DC @ 100 mA (resistive load)

Maximum frequency: 10 kHz

Saturation voltage: 0.5 V DC

■ **Voltage Pulse**

Maximum frequency: 10 kHz

High level: Rating (5, 12 or 24 V) $\pm$ 10 %

Low level: $\leq$ 0.5V

Load resistance:

$\geq$ 250 Ω for 5 V

$\geq$ 600 Ω for 12 V

$\geq$ 1200 Ω for 24 V

■ **Photo MOSFET Relay Pulse**

Maximum frequency: 30 Hz

Timer: Limits ON time within 75 $\pm$ 25 msec. for wider than 75 msec. pulses

Rating: 132 V AC @ 200 mA ($\cos \phi = 1$)

30 V DC @ 200 mA (resistive load)

ON resistance: $\leq$ 2 Ω

INSTALLATION

Current consumption: Approx. 80 mA

Operating temperature: -5 to +55°C (23 to 131°F)

Operating humidity: 30 to 90 %RH (non-condensing)

Mounting: Surface or DIN rail; Standard Rack Mounting

Frame BX-16H available

Weight: 180 g (0.40 lb)

PERFORMANCE

Insulation resistance: $\geq$ 100 M Ω with 500 V DC

Dielectric strength: 500 V AC @ 1 minute


(input to output to power)

1500 V AC @ 1 minute (input or output or power to ground)

OUTPUT LOGIC


INPUT TYPE	INPUT	VOLTAGE PULSE OUTPUT	OPEN COLLECTOR or PHOTO MOSFET RELAY PULSE OUTPUT
Voltage Pulse	H L 	H L 	OFF ON 
Mechanical Contact Open Collector	OFF ON 	H L 	OFF ON 

EXTERNAL DIMENSIONS & TERMINAL ASSIGNMENTS unit: mm [inch]

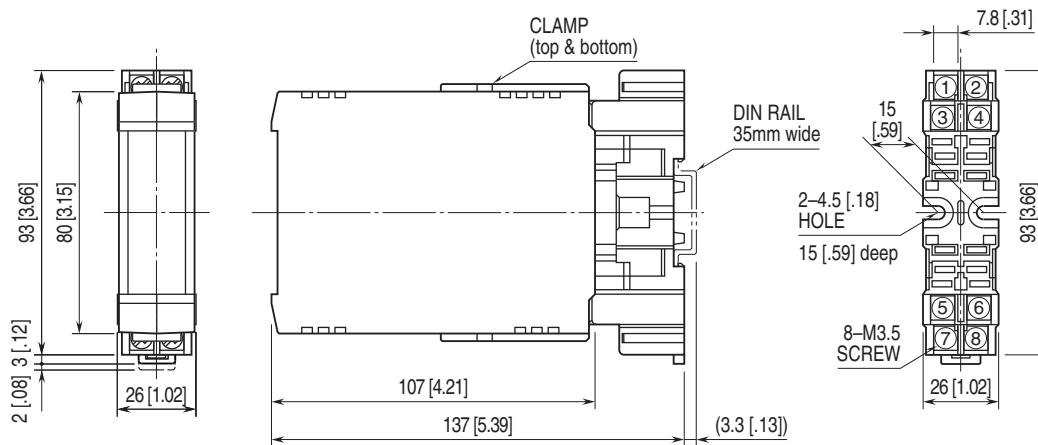

•When mounting, no extra space is needed between units.


SCHEMATIC CIRCUITRY & CONNECTION DIAGRAM

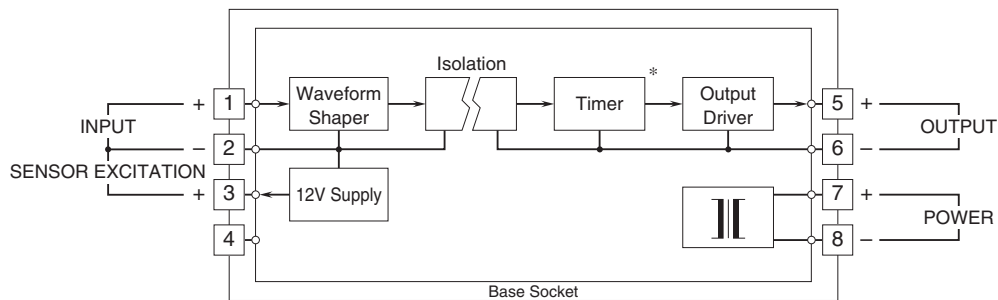


* Timer is provided for low frequency open collector or photo MOSFET relay pulse output.

Input Connection Examples

■ Mechanical Contact or Open Collector

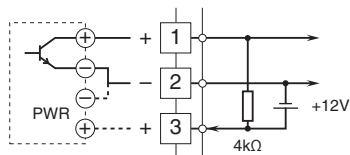


■ Voltage Pulse

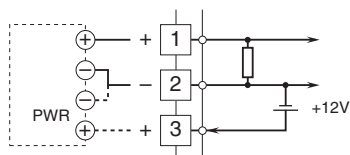


Output Connection Examples

■ Open Collector




■ Voltage Pulse




■ Photo MOSFET Relay Pulse

• AC Powered

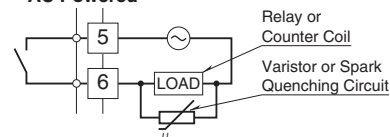

• DC Powered



Specifications are subject to change without notice.