


Remote I/O R7F4H Series

PROFINET I/O MODULE

(PNP discrete input, NPN transistor output, 8 points each, tension clamp terminal block)

Functions & Features

- Remote I/O module to input/output digital I/O signal to field bus (PROFINET)

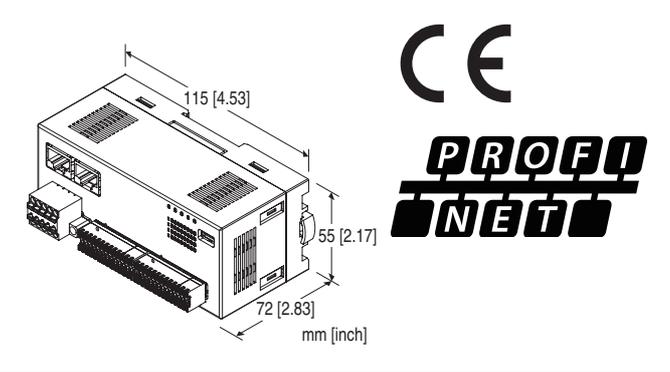

MODEL: R7F4HPN-DAC16A-4-R[1]

ORDERING INFORMATION

- Code number: R7F4HPN-DAC16A-4-R[1]
Specify a code from below for [1].
(e.g. R7F4HPN-DAC16A-4-R/Q)
- Specify the specification for option code /Q
(e.g. /C01/SET)

I/O TYPE

DAC16A: PNP discrete input &
NPN transistor output, 8 points each

TERMINAL BLOCK

- 4: Tension clamp terminal block for power supply
- RJ-45 Modular jack for communication
- Tension clamp terminal block for I/O

POWER INPUT

DC power

R: 24 V DC

(Operational voltage range: $\pm 10\%$; ripple 10 %p-p max.)

[1] OPTIONS

blank: none

/Q: With options (specify the specification)

SPECIFICATIONS OF OPTION: Q (multiple selections)

COATING (For the detail, refer to our web site.)

/C01: Silicone coating

/C02: Polyurethane coating

/C03: Rubber coating

EX-FACTORY SETTING

/SET: Preset according to the Ordering Information Sheet
(No. ESU-8010-E)

RELATED PRODUCTS

- PC configurator software (model: R7CFG)
- GSDML file

The configurator software and GSDML file are downloadable at our web site.

For connecting to PC, use commercially available Type-C USB cable. (provided by user)

GENERAL SPECIFICATIONS

Connection

PROFINET: RJ-45 Modular Jack

Power supply, exc. supply, I/O: Tension clamp terminal

Housing material: Flame-resistant resin (gray)

Isolation: Input or exc. supply to output or exc. supply to PROFINET or FE to power

Output at the loss of communication: Configurable via R7CFG

Status indicator LEDs: PWR, RUN, ERR, LNK1, LNK2
(Refer to the instruction manual)

Discrete I/O status indicator LED: Green LED turns on with I/O ON

Read rate: Selectable with R7CFG

PROFINET COMMUNICATION

Communication standard: IEEE 802.3

Transmission: 100BASE-TX

Baud rate: 100 Mbps / full duplex

Transmission media: 100BASE-TX (STP, Category 5)

RJ-45 modular jack \times 2 ports

Network topology: Line, star, tree and ring

Device class: PROFINET IO device

Conformance class: CC-B (PROFINET RT)

Conformance test version: V2.4

Media redundancy: MRP

INPUT SPECIFICATIONS

Common: Negative common (PNP), 8 points per common

Numbers of input: 8 points

Maximum inputs applicable at once: No limit (at 24 V DC)

Sensor excitation: 24 V DC $\pm 10\%$; ripple 5 %p-p max.

ON voltage / current: ≥ 15 V DC (X0 to X7 input terminal to

MODEL: R7F4HPN-DAC16A-4

GND) / ≥ 3.5 mA

OFF voltage / current: ≤ 5 V DC (X0 to X7 input terminal to GND) / ≤ 1.0 mA

Input current: ≤ 5.5 mA per point at 24 V DC

Input resistance: Approx. 4.4 k Ω

ON delay: ≤ 0.2 msec.

OFF delay: ≤ 0.5 msec.

OUTPUT SPECIFICATIONS

Common: Negative common (NPN), 8 points per common

Number of output: 8 points

Maximum outputs applicable at once: No limit (at 24 V DC)

Sensor excitation: 24 V DC ± 10 %, ripple 5 %p-p max.

Rated output current: 0.1 A per point, 0.8 A per common

Residual voltage: ≤ 1.2 V

Leakage current: ≤ 0.1 mA

ON delay: ≤ 0.2 msec.

OFF delay: ≤ 0.5 msec.

Overload current protection function: The current value is limited when overcurrent is detected.

Overheat protection function: The output is turned off when overheat is detected.

(When driving an inductive load, connect a diode in parallel with the load.)

INSTALLATION

Current consumption

• **DC (@ 24 V DC):** ≤ 55 mA

(contact I/O load charge is not included)

Operating temperature: -10 to +55°C (14 to 131°F)

Storage temperature: -20 to +65°C (-4 to +149°F)

Operating humidity: 30 to 90 %RH (non-condensing)

Atmosphere: No corrosive gas or heavy dust

Mounting: Surface or DIN rail (35 mm rail)

Weight: 160 g (0.35 lb)

PERFORMANCE

Insulation resistance: ≥ 100 M Ω with 500 V DC

Dielectric strength: 1500 V AC @ 1 minute

(input or exc. supply to output or exc. supply to PROFINET or FE to power)

STANDARDS & APPROVALS

EU conformity:

EMC Directive

EMI EN 61000-6-4

EMS EN 61000-6-2

RoHS Directive

PC CONFIGURATOR

The following parameters can be set with using PC Configurator Software (model: R7CFG)


Refer to the users manual for the R7CFG for detailed operation of the software program.

■ CHANNEL BATCH SETTING

PARAMETER	SETTING RANGE	DEFAULT SETTING
Conversion rate	1 msec., 5 msec., 10 msec., 20 msec., 50 msec., 70 msec., 100 msec., 200 msec.	10 msec.
Output Hold / Clear	Hold / Clear	Hold

MODEL: R7F4HPN-DAC16A-4

EXTERNAL VIEW

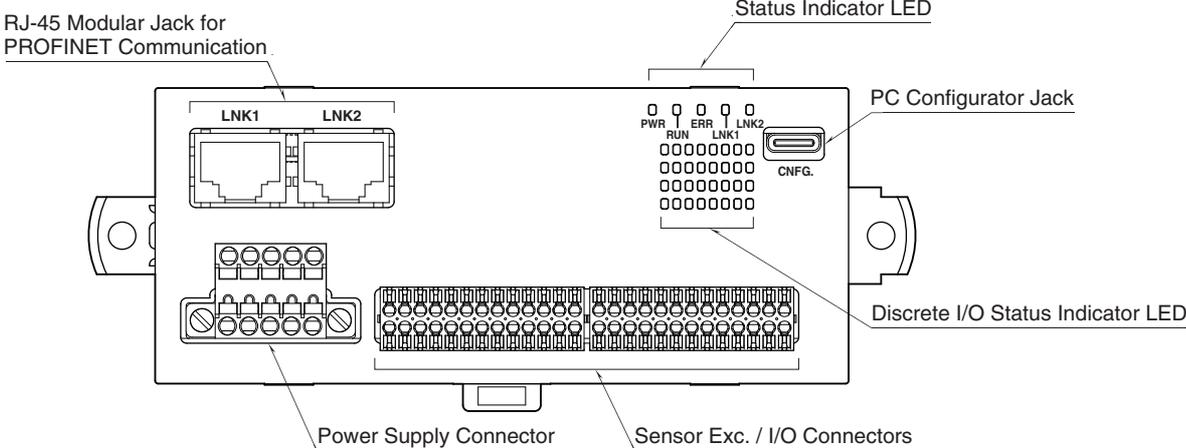

TERMINAL ASSIGNMENTS

■ SENSOR EXC. / I/O CONNECTION


Applicable connector: DFMC0,5/13-ST-2,54 (Phoenix Contact) (included in the package)

Applicable wire size: 0.14 - 0.5mm², stripped length 7mm

Recommended solderless terminal:

- AI0,14-6GY 0.14mm² (Phoenix Contact)
- AI0,14-8GY 0.14mm² (Phoenix Contact)
- AI0,25-6YE 0.25mm² (Phoenix Contact)
- AI0,25-8YE 0.25mm² (Phoenix Contact)
- A0,25-7 0.25mm² (Phoenix Contact)
- A0,34-7 0.34mm² (Phoenix Contact)

Note: If the stripped length does not match the length of recommended solderless terminal, adjust to the stripped length of 7mm by cutting the terminal if it is too long, or by extending the wire if the terminal is too short.

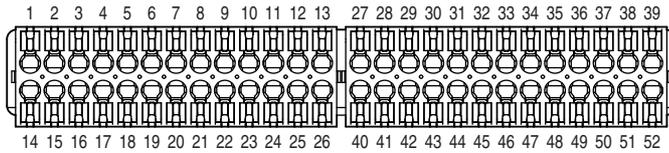

PIN No.	ID	FUNCTION	PIN No.	ID	FUNCTION
1	+24V1	24V DC	27	+24V2	24V DC
2	X0	Input 0	28	Y0	Output 0
3	+24V1	24V DC	29	+24V2	24V DC
4	GND1	0V	30	GND2	0V
5	X2	Input 2	31	Y2	Output 2
6	+24V1	24V DC	32	+24V2	24V DC
7	GND1	0V	33	GND2	0V
8	X4	Input 4	34	Y4	Output 4
9	+24V1	24V DC	35	+24V2	24V DC
10	GND1	0V	36	GND2	0V
11	X6	Input 6	37	Y6	Output 6
12	+24V1	24V DC	38	+24V2	24V DC
13	GND1	0V	39	GND2	0V
PIN No.	ID	FUNCTION	PIN No.	ID	FUNCTION
14	GND1	0V	40	GND2	0V
15	X1	Input 1	41	Y1	Output 1
16	+24V1	24V DC	42	+24V2	24V DC
17	GND1	0V	43	GND2	0V
18	X3	Input 3	44	Y3	Output 3
19	+24V1	24V DC	45	+24V2	24V DC
20	GND1	0V	46	GND2	0V
21	X5	Input 5	47	Y5	Output 5
22	+24V1	24V DC	48	+24V2	24V DC
23	GND1	0V	49	GND2	0V
24	X7	Input 7	50	Y7	Output 7
25	+24V1	24V DC	51	+24V2	24V DC
26	GND1	0V	52	GND2	0V

■ POWER SUPPLY TERMINAL ASSIGNMENT

Module side connector: MC1,5/5-GF-3,5 (Phoenix Contact)


Cable side connector: TFMC1,5/5-STF-3,5 (Phoenix Contact)

Applicable wire size: 0.2 – 1.5 mm²

Stripped length: 10 mm

Recommended solderless terminal

- AI0,25-10YE 0.25mm² (Phoenix Contact)
- AI0,34-10TQ 0.34mm² (Phoenix Contact)
- AI0,5-10WH 0.5mm² (Phoenix Contact)
- AI0,75-10GY 0.75mm² (Phoenix Contact)
- A1-10 1.0mm² (Phoenix Contact)
- A1,5-10 1.5mm² (Phoenix Contact)




PIN NO.	ID	FUNCTION
1	FE	Functional Earth
2	NC	No Connection
3	NC	No Connection
4	+24V	Power Input (24V DC)
5	0V	Power Input (0V)

Note: The numbers marked on the connector have no relationship to the pin number of the module. Wire according to the instruction manual of the module.


I/O DATA DESCRIPTIONS

■ DISCRETE INPUT

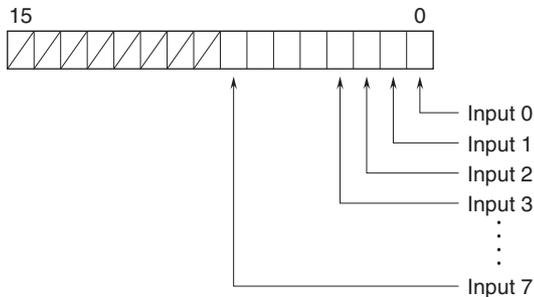

0: OFF 1: ON


■ DISCRETE OUTPUT

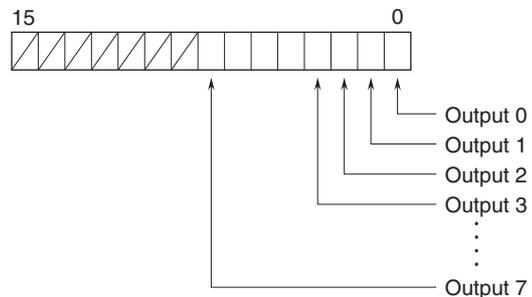


0: OFF 1: ON

MODEL: R7F4HPN-DAC16A-4

EXTERNAL DIMENSIONS unit: mm [inch]

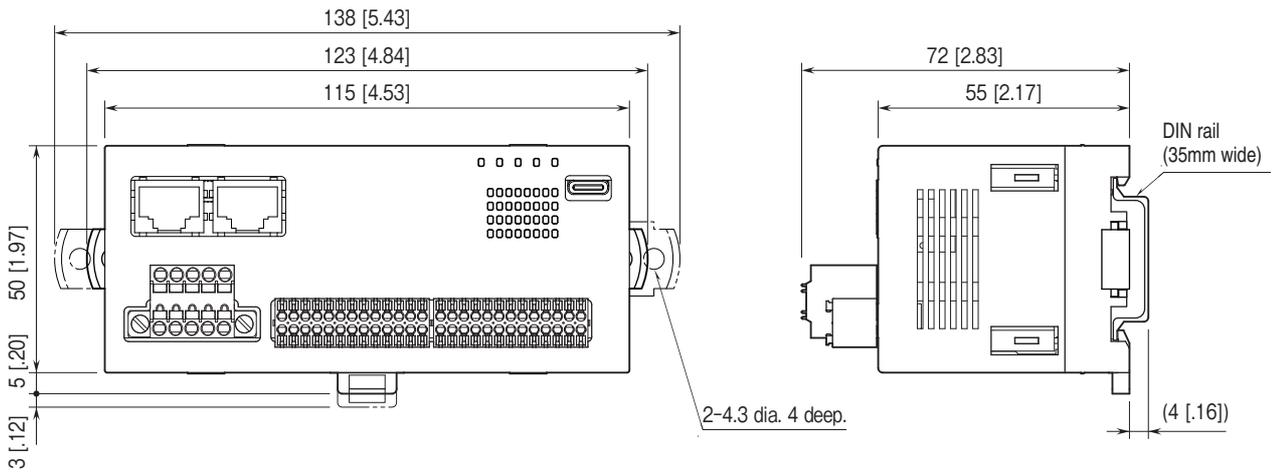


MOUNTING REQUIREMENTS unit: mm [inch]

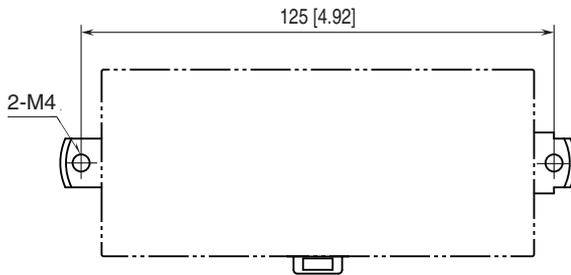

SCHEMATIC CIRCUITRY & CONNECTION DIAGRAM

Note: In order to improve EMC performance, bond the FE terminal to ground.

Caution: FE terminal is NOT a protective conductor terminal.

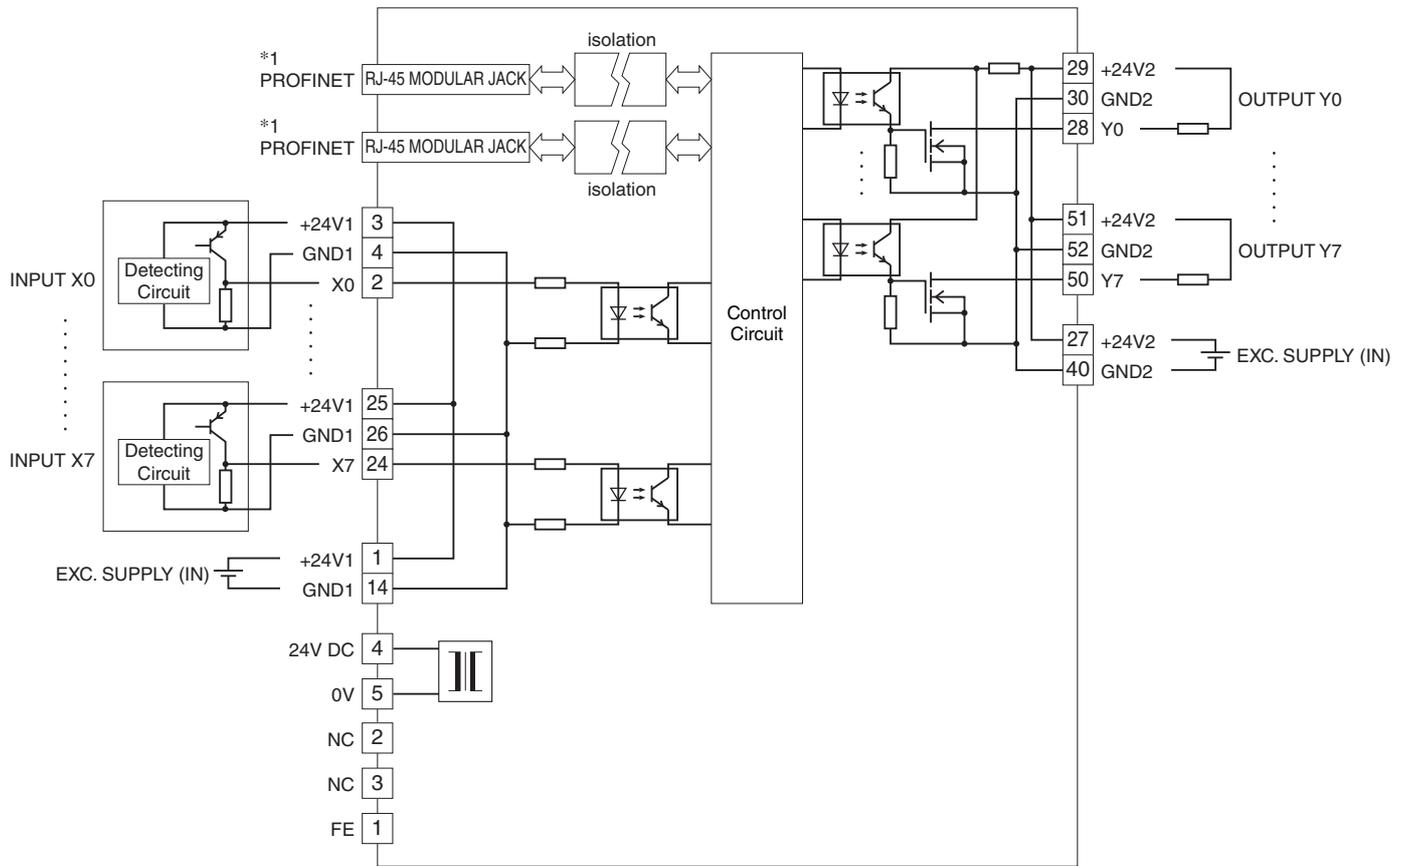

*1. The network cable can be connected to either one.



Specifications are subject to change without notice.