


## Remote I/O R7F4H Series

### PROFINET I/O MODULE

(NPN discrete input, PNP transistor output, 8 points each, tension clamp terminal block)

#### Functions & Features

- Remote I/O module to input/output digital I/O signal to field bus (PROFINET)

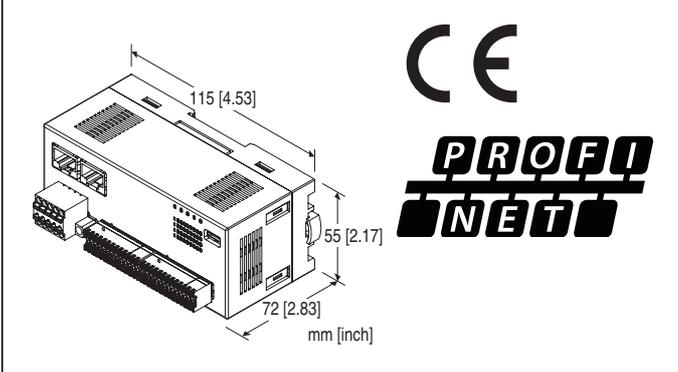

### MODEL: R7F4HPN-DAC16B-4-R[1]

#### ORDERING INFORMATION

- Code number: R7F4HPN-DAC16B-4-R[1]  
Specify a code from below for [1].  
(e.g. R7F4HPN-DAC16B-4-R/Q)
- Specify the specification for option code /Q  
(e.g. /C01/SET)

#### I/O TYPE

**DAC16B:** NPN discrete input & PNP transistor output, 8 points each

#### TERMINAL BLOCK

- 4: Tension clamp terminal block for power supply
- RJ-45 Modular jack for communication
- Tension clamp terminal block for I/O

#### POWER INPUT

##### DC power

R: 24 V DC

(Operational voltage range:  $\pm 10\%$ ; ripple 10 %p-p max.)

#### [1] OPTIONS

**blank:** none

**/Q:** With options (specify the specification)

#### SPECIFICATIONS OF OPTION: Q (multiple selections)

##### COATING (For the detail, refer to our web site.)

/C01: Silicone coating

/C02: Polyurethane coating

/C03: Rubber coating

##### EX-FACTORY SETTING

/SET: Preset according to the Ordering Information Sheet (No. ESU-8010-E)

#### RELATED PRODUCTS

- PC configurator software (model: R7CFG)
- GSDML file

The configurator software and GSDML file are downloadable at our web site.

For connecting to PC, use commercially available Type-C USB cable. (provided by user)

#### GENERAL SPECIFICATIONS

##### Connection

**PROFINET:** RJ-45 Modular Jack

**Power supply, exc. supply, I/O:** Tension clamp terminal

**Housing material:** Flame-resistant resin (gray)

**Isolation:** Input or exc. supply to output or exc. supply to PROFINET or FE to power

**Output at the loss of communication:** Configurable via R7CFG

**Status indicator LEDs:** PWR, RUN, ERR, LNK1, LNK2  
(Refer to the instruction manual)

**Discrete I/O status indicator LED:** Green LED turns on with I/O ON

**Read rate:** Selectable with R7CFG

#### PROFINET COMMUNICATION

**Communication standard:** IEEE 802.3

**Transmission:** 100BASE-TX

**Baud rate:** 100 Mbps / full duplex

**Transmission media:** 100BASE-TX (STP, Category 5)

RJ-45 modular jack  $\times$  2 ports

**Network topology:** Line, star, tree and ring

**Device class:** PROFINET IO device

**Conformance class:** CC-B (PROFINET RT)

**Conformance test version:** V2.4

**Media redundancy:** MRP

#### INPUT SPECIFICATIONS

**Common:** Positive common (NPN), 8 points per common

**Numbers of input:** 8 points

**Maximum inputs applicable at once:** No limit (at 24 V DC)

**Sensor excitation:** 24 V DC  $\pm 10\%$ ; ripple 5 %p-p max.

**ON voltage / current:**  $\geq 15$  V DC (X0 to X7 input terminal -

# MODEL: R7F4HPN-DAC16B-4

+24V) /  $\geq 3.5$  mA

**OFF voltage / current:**  $\leq 5$  V DC (X0 to X7 input terminal -  
+24V) /  $\leq 1.0$  mA

**Input current:**  $\leq 5.5$  mA per point at 24 V DC

**Input resistance:** Approx. 4.4 k $\Omega$

**ON delay:**  $\leq 0.2$  msec.

**OFF delay:**  $\leq 0.5$  msec.

## OUTPUT SPECIFICATIONS

**Common:** Positive common (PNP), 8 points per common

**Number of output:** 8 points

**Maximum outputs applicable at once:** No limit (at 24 V DC)

**Sensor excitation:** 24 V DC  $\pm 10$  %, ripple 5 %p-p max.

**Rated output current:** 0.1 A per point, 0.8 A per common

**Residual voltage:**  $\leq 1.2$  V

**Leakage current:**  $\leq 0.1$  mA

**ON delay:**  $\leq 0.2$  msec.

**OFF delay:**  $\leq 0.5$  msec.

**Overload current protection function:** The current value is limited when overcurrent is detected.

**Overheat protection function:** The output is turned off when overheat is detected.

(When driving an inductive load, connect a diode in parallel with the load.)

## INSTALLATION

**Current consumption**

• **DC (@ 24 V DC):**  $\leq 55$  mA

(contact I/O load charge is not included)

**Operating temperature:** -10 to +55°C (14 to 131°F)

**Storage temperature:** -20 to +65°C (-4 to +149°F)

**Operating humidity:** 30 to 90 %RH (non-condensing)

**Atmosphere:** No corrosive gas or heavy dust

**Mounting:** Surface or DIN rail (35 mm rail)

**Weight:** 160 g (0.35 lb)

## PERFORMANCE

**Insulation resistance:**  $\geq 100$  M $\Omega$  with 500 V DC

**Dielectric strength:** 1500 V AC @ 1 minute

(input or exc. supply to output or exc. supply to PROFINET or FE to power)

## STANDARDS & APPROVALS

**EU conformity:**

EMC Directive

EMI EN 61000-6-4

EMS EN 61000-6-2

RoHS Directive

## PC CONFIGURATOR

The following parameters can be set with using PC Configurator Software (model: R7CFG)

Refer to the users manual for the R7CFG for detailed operation of the software program.

### ■ CHANNEL BATCH SETTING


| PARAMETER           | SETTING RANGE  | DEFAULT SETTING |
|---------------------|--|-----------------|
| Conversion rate     | 1 msec., 5 msec., 10 msec.,<br>20 msec., 50 msec., 70 msec.,<br>100 msec., 200 msec. | 10 msec.        |
| Output Hold / Clear | Hold / Clear   | Hold            |

# MODEL: R7F4HPN-DAC16B-4

## EXTERNAL VIEW

RJ-45 Modular Jack for PROFINET Communication

Status Indicator LED

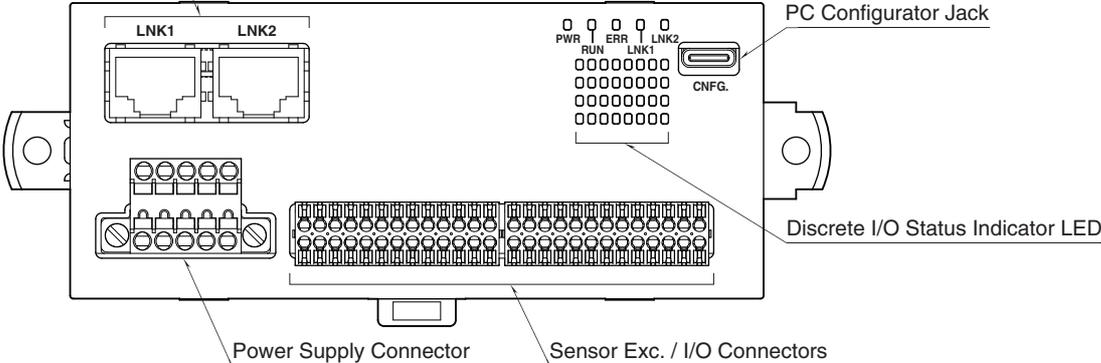

PC Configurator Jack

Discrete I/O Status Indicator LED

Power Supply Connector

Sensor Exc. / I/O Connectors

## TERMINAL ASSIGNMENTS

### ■ SENSOR EXC. / I/O CONNECTION


Applicable connector: DFMC0,5/13-ST-2,54 (Phoenix Contact) (included in the package)

Applicable wire size: 0.14 - 0.5mm<sup>2</sup>, stripped length 7mm

Recommended solderless terminal:

- AI0,14-6GY 0.14mm<sup>2</sup> (Phoenix Contact)
- AI0,14-8GY 0.14mm<sup>2</sup> (Phoenix Contact)
- AI0,25-6YE 0.25mm<sup>2</sup> (Phoenix Contact)
- AI0,25-8YE 0.25mm<sup>2</sup> (Phoenix Contact)
- A0,25-7 0.25mm<sup>2</sup> (Phoenix Contact)
- A0,34-7 0.34mm<sup>2</sup> (Phoenix Contact)

Note: If the stripped length does not match the length of recommended solderless terminal, adjust to the stripped length of 7mm by cutting the terminal if it is too long, or by extending the wire if the terminal is too short.

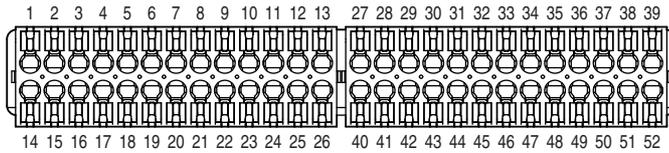

| PIN No. | ID    | FUNCTION | PIN No. | ID    | FUNCTION |
|---------|-------|----------|---------|-------|----------|
| 1       | +24V1 | 24V DC   | 27      | +24V2 | 24V DC   |
| 2       | X0    | Input 0  | 28      | Y0    | Output 0 |
| 3       | +24V1 | 24V DC   | 29      | +24V2 | 24V DC   |
| 4       | GND1  | 0V       | 30      | GND2  | 0V       |
| 5       | X2    | Input 2  | 31      | Y2    | Output 2 |
| 6       | +24V1 | 24V DC   | 32      | +24V2 | 24V DC   |
| 7       | GND1  | 0V       | 33      | GND2  | 0V       |
| 8       | X4    | Input 4  | 34      | Y4    | Output 4 |
| 9       | +24V1 | 24V DC   | 35      | +24V2 | 24V DC   |
| 10      | GND1  | 0V       | 36      | GND2  | 0V       |
| 11      | X6    | Input 6  | 37      | Y6    | Output 6 |
| 12      | +24V1 | 24V DC   | 38      | +24V2 | 24V DC   |
| 13      | GND1  | 0V       | 39      | GND2  | 0V       |
|         |       |          |         |       |          |
| PIN No. | ID    | FUNCTION | PIN No. | ID    | FUNCTION |
| 14      | GND1  | 0V       | 40      | GND2  | 0V       |
| 15      | X1    | Input 1  | 41      | Y1    | Output 1 |
| 16      | +24V1 | 24V DC   | 42      | +24V2 | 24V DC   |
| 17      | GND1  | 0V       | 43      | GND2  | 0V       |
| 18      | X3    | Input 3  | 44      | Y3    | Output 3 |
| 19      | +24V1 | 24V DC   | 45      | +24V2 | 24V DC   |
| 20      | GND1  | 0V       | 46      | GND2  | 0V       |
| 21      | X5    | Input 5  | 47      | Y5    | Output 5 |
| 22      | +24V1 | 24V DC   | 48      | +24V2 | 24V DC   |
| 23      | GND1  | 0V       | 49      | GND2  | 0V       |
| 24      | X7    | Input 7  | 50      | Y7    | Output 7 |
| 25      | +24V1 | 24V DC   | 51      | +24V2 | 24V DC   |
| 26      | GND1  | 0V       | 52      | GND2  | 0V       |

## ■ POWER SUPPLY TERMINAL ASSIGNMENT

**Module side connector:** MC1,5/5-GF-3,5 (Phoenix Contact)


**Cable side connector:** TFMC1,5/5-STF-3,5 (Phoenix Contact)

**Applicable wire size:** 0.2 – 1.5 mm<sup>2</sup>

**Stripped length:** 10 mm

Recommended solderless terminal

- AI0,25-10YE 0.25mm<sup>2</sup> (Phoenix Contact)
- AI0,34-10TQ 0.34mm<sup>2</sup> (Phoenix Contact)
- AI0,5-10WH 0.5mm<sup>2</sup> (Phoenix Contact)
- AI0,75-10GY 0.75mm<sup>2</sup> (Phoenix Contact)
- A1-10 1.0mm<sup>2</sup> (Phoenix Contact)
- A1,5-10 1.5mm<sup>2</sup> (Phoenix Contact)




| PIN NO. | ID   | FUNCTION             |
|---------|------|----------------------|
| 1       | FE   | Functional Earth     |
| 2       | NC   | No Connection        |
| 3       | NC   | No Connection        |
| 4       | +24V | Power Input (24V DC) |
| 5       | 0V   | Power Input (0V)     |

Note: The numbers marked on the connector have no relationship to the pin number of the module. Wire according to the instruction manual of the module.


## I/O DATA DESCRIPTIONS

### ■ DISCRETE INPUT

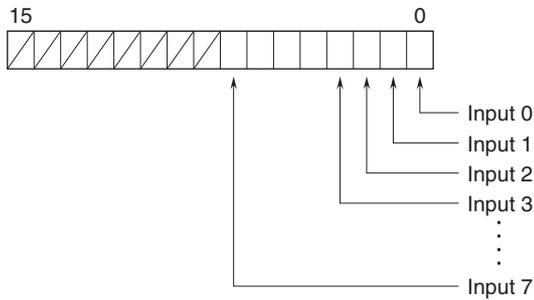

0: OFF 1: ON


### ■ DISCRETE OUTPUT

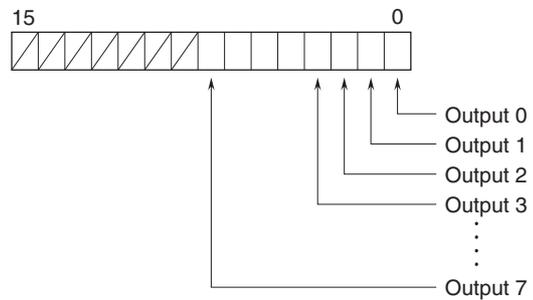


0: OFF 1: ON

# MODEL: R7F4HPN-DAC16B-4

## EXTERNAL DIMENSIONS unit: mm [inch]

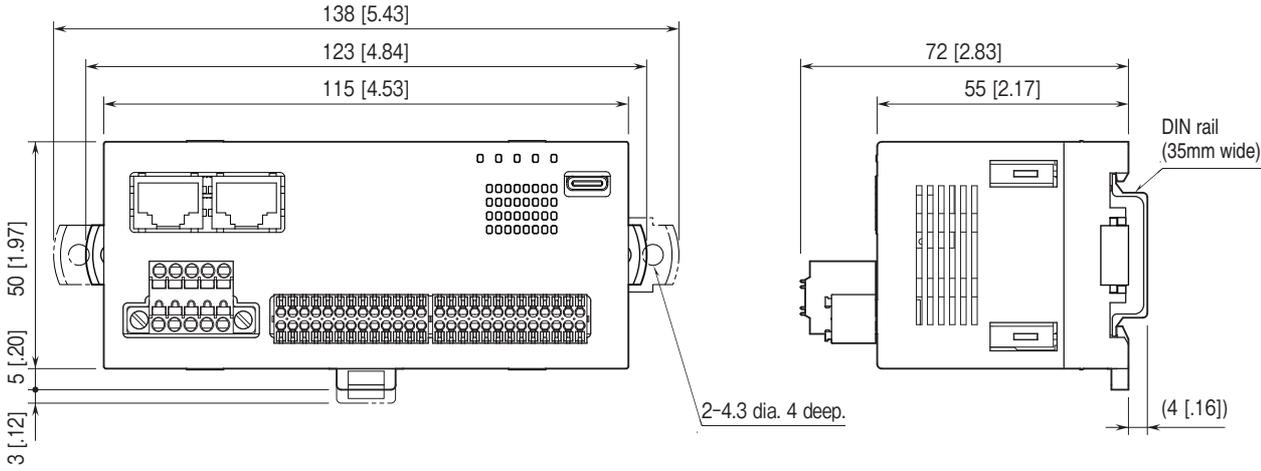

## MOUNTING REQUIREMENTS unit: mm [inch]

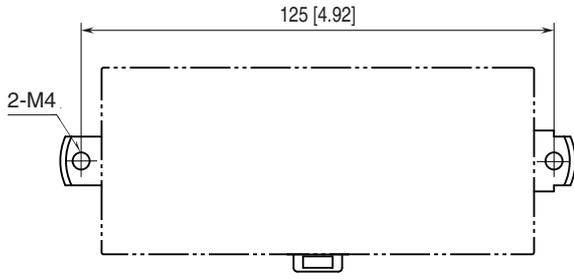


# MODEL: R7F4HPN-DAC16B-4

## SCHEMATIC CIRCUITRY & CONNECTION DIAGRAM

Note: In order to improve EMC performance, bond the FE terminal to ground.

Caution: FE terminal is NOT a protective conductor terminal.

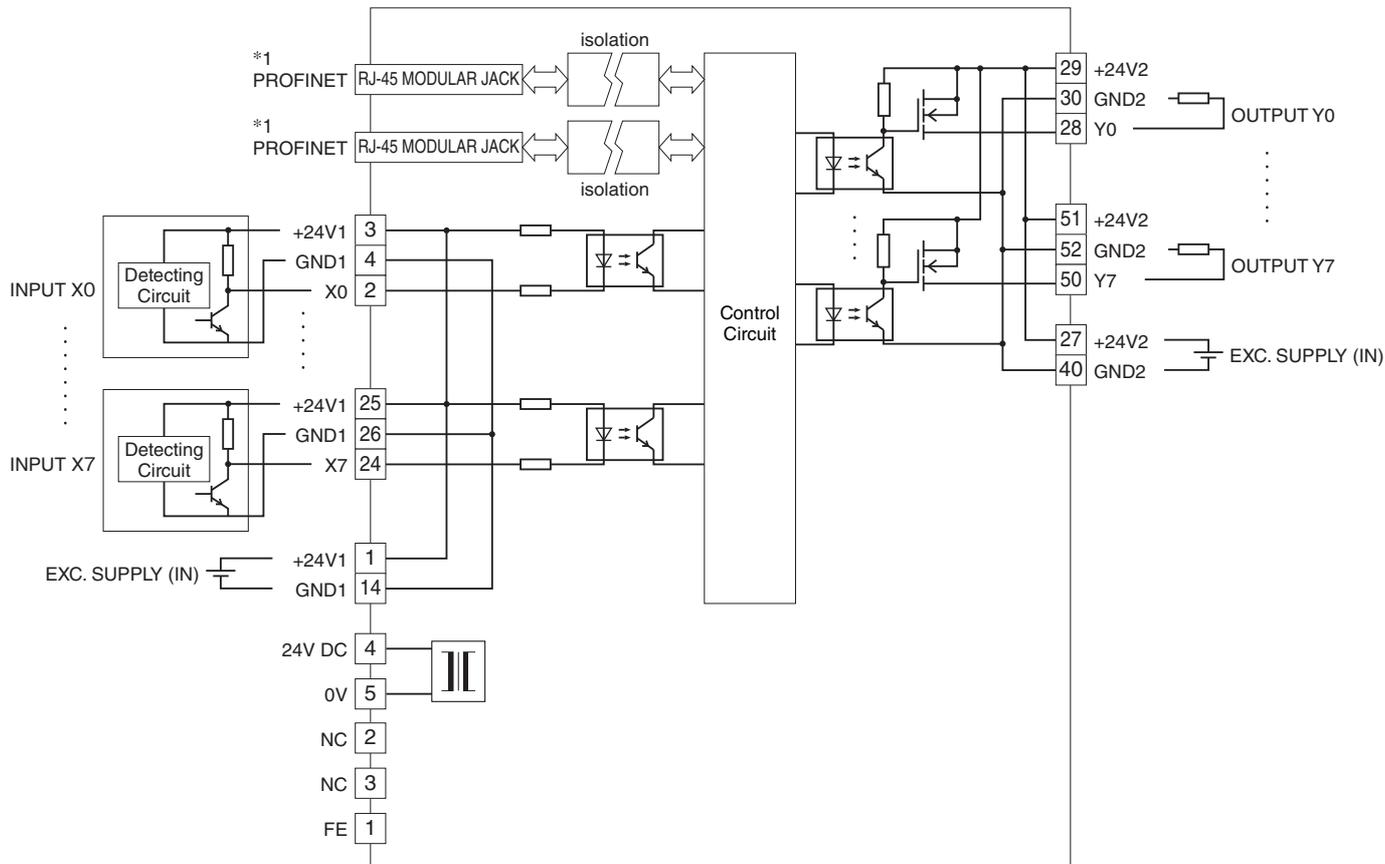

\*1. The network cable can be connected to either one.



Specifications are subject to change without notice.