

Plug-in Signal Conditioners K-UNIT

DC/FREQUENCY CONVERTER


(field-configurable)

Functions & Features

- Providing a pulse rate output in proportion to DC input signal
- Frequency range adjustable with a front-mounted 16-position rotary switch and potentiometer
- Low-end cutout adjustable
- Isolation up to 2000 V AC
- High-density mounting

Typical Applications

- Totalizing applications in combination with a counter

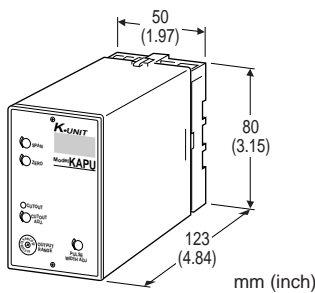

MODEL: KAPU-[1][2]-[3][4]

ORDERING INFORMATION

- Code number: KAPU-[1][2]-[3][4]
- Specify a code from below for each of [1] through [4].
(e.g. KAPU-61-B/Q)
- Special input range (For codes Z & 0)
 - Output frequency range (e.g. 0 - 500 Hz)
 - Specify the specification for option code /Q
(e.g. /C01/S01)

[1] INPUT

Current

- A:** 4 - 20 mA DC (Input resistance 250 Ω)
- A1:** 4 - 20 mA DC (Input resistance 50 Ω)
- B:** 2 - 10 mA DC (Input resistance 500 Ω)
- C:** 1 - 5 mA DC (Input resistance 1000 Ω)
- D:** 0 - 20 mA DC (Input resistance 50 Ω)
- E:** 0 - 16 mA DC (Input resistance 62.5 Ω)
- F:** 0 - 10 mA DC (Input resistance 100 Ω)
- G:** 0 - 1 mA DC (Input resistance 1000 Ω)
- H:** 10 - 50 mA DC (Input resistance 100 Ω)
- Z:** Specify current (See INPUT SPECIFICATIONS)

Voltage

- 1:** 0 - 10 mV DC (Input resistance 10 kΩ min.)

- 15:** 0 - 50 mV DC (Input resistance 10 kΩ min.)
- 16:** 0 - 60 mV DC (Input resistance 10 kΩ min.)
- 2:** 0 - 100 mV DC (Input resistance 100 kΩ min.)
- 3:** 0 - 1 V DC (Input resistance 1 MΩ min.)
- 4:** 0 - 10 V DC (Input resistance 1 MΩ min.)
- 5:** 0 - 5 V DC (Input resistance 1 MΩ min.)
- 6:** 1 - 5 V DC (Input resistance 1 MΩ min.)
- 4W:** -10 - +10 V DC (Input resistance 1 MΩ min.)
- 0:** Specify voltage (See INPUT SPECIFICATIONS)

[2] OUTPUT

- 1:** Open collector (max. frequency 10 kHz)
- 2:** 5 V pulse (max. frequency 10 kHz)
- 3:** Relay contact (max. 130 pulses/min.)
- 4:** Low frequency open collector (max. 130 pulses/min.)
- 5:** Low frequency 5 V pulse (max. 130 pulses/min.)
- 6:** 24 V pulse (max. 130 pulses/min.)
- 7:** Middle range frequency open collector (max. 312 Hz)
- 8:** Middle range frequency 5 V voltage pulse (max. 312 Hz)

[3] POWER INPUT

AC Power

- B:** 100 V AC
 - C:** 110 V AC
 - D:** 115 V AC
 - F:** 120 V AC
 - G:** 200 V AC
 - H:** 220 V AC
 - J:** 240 V AC
- DC Power
- S:** 12 V DC
 - R:** 24 V DC

[4] OPTIONS

- blank:** none
- /Q:** With options (specify the specification)

SPECIFICATIONS OF OPTION: Q (multiple selections)

- COATING** (For the detail, refer to our web site.)
- /C01:** Silicone coating
- /C02:** Polyurethane coating
- /C03:** Rubber coating
- TERMINAL SCREW MATERIAL**
- /S01:** Stainless steel

GENERAL SPECIFICATIONS

- Construction:** Plug-in
- Connection:** M3.5 screw terminals
- Screw terminal:** Chromated steel (standard) or stainless steel

Housing material: Flame-resistant resin (black)
Isolation: Input to output to power
Zero adjustment: 0 - 5 % (front)
Span adjustment: 50 - 100 % of range (front)
Output frequency adjustment: Preselecting range with a rotary switch and fine control with span adjustment (50 - 100 %)
Output pulse width adjustment: Three-turn screwdriver adjustment (front)
Low-end cutout: 0 to 10 % (front); a red LED assists in adjusting the cutout point; turns on during the cutout.

INPUT SPECIFICATIONS

■ DC Current:

Shunt resistor attached to the input terminals (0.5 W)
 Specify input resistance value for code Z.

■ DC Voltage: -300 - +300 V DC

Minimum span: 10 mV

Offset: Max. 1.5 times span

Input resistance

Span 10 - 100 mV : $\geq 10 \text{ k}\Omega$

Span 0.1 - 1 V : $\geq 100 \text{ k}\Omega$

Span $\geq 1 \text{ V}$: $\geq 1 \text{ M}\Omega$

OUTPUT SPECIFICATIONS

Note: For factory setting, maximum frequency of the selected range is used to determine pulse width. Pulse width is adjusted until the duty ratio becomes 50 % of the maximum frequency. If this value lies outside of the adjustable range, either maximum or minimum selectable value will be used.

■ Open Collector:

50 V DC @ 50 mA (resistive load)

Frequency range: 0 - 10 kHz

ON pulse width: 40 $\mu\text{sec.}$ - 0.8 msec. adjustable

Saturation voltage: 0.6 V DC

■ Low Frequency Open Collector:

50 V DC @ 50 mA (resistive load)

Frequency range: 0 - 130 pulses/min.

ON pulse width: 40 msec. - 0.8 sec. adjustable

Saturation voltage: 0.6 V DC

■ Middle Range Frequency Open Collector:

50 V DC @ 50 mA (resistive load)

Frequency range: 0 - 312 Hz

ON pulse width: 2 - 35 msec. adjustable

Saturation voltage: 0.6 V DC

■ Relay Contact: 120 V AC @ 200 mA ($\cos \phi = 1$)

240 V AC @ 100 mA ($\cos \phi = 1$)

24 V DC @ 200 mA (resistive load)

Maximum switching voltage: 380 V AC or 125V DC

Maximum switching power: 24 VA or 4.8 W

Minimum load: 5 V DC @ 10 mA

Frequency range: 0 - 130 pulses/min.

ON pulse width: 40 msec. - 0.8 sec. adjustable

Relay life:

$\geq 5 \times 10^7$ cycles (mechanical)

$\geq 10^5$ cycles (electrical)

■ 5 V Pulse

Frequency range: 0 - 10 kHz

Low pulse width: 40 $\mu\text{sec.}$ - 0.8 msec. adjustable

High level: 5 V $\pm 10 \%$

Low level: $\leq 0.5 \text{ V}$

Load resistance: 600 Ω min.

■ Middle Range Frequency 5 V Pulse

Frequency range: 0 - 312 Hz

Low pulse width: 2 - 35 msec. adjustable

High level: 5 V $\pm 10 \%$

Low level: $\leq 0.5 \text{ V}$

Load resistance: 600 Ω min.

■ Low Frequency 5 V Pulse

Frequency range: 0 - 130 pulses/min.

Low pulse width: 40 msec. - 0.8 sec. adjustable

High level: 5 V $\pm 10 \%$

Low level: $\leq 0.5 \text{ V}$

Load resistance: 600 Ω min.

■ 24 V Pulse

Frequency range: 0 - 130 pulses/min.

High pulse width: 40 msec. - 0.8 sec. adjustable

High level: 24 V $\pm 10 \%$

Low level: $\leq 0.5 \text{ V}$

Load current: 30 mA max.

Load resistance: 800 Ω min.

• Open Collector, 5V Pulse

SW No.	SPAN RANGE	
	MIN. (50%)	MAX. (100%)
0	0 - 5 kHz	0 - 10 kHz
1	0 - 2.5 kHz	0 - 5 kHz
2	0 - 1.25 kHz	0 - 2.5 kHz
3	0 - 625 Hz	0 - 1.25 kHz
4	0 - 312 Hz	0 - 625 Hz
5	0 - 156 Hz	0 - 312 Hz
6	0 - 78 Hz	0 - 156 Hz
7	0 - 39 Hz	0 - 78 Hz
8	0 - 20 Hz	0 - 39 Hz
9	0 - 10 Hz	0 - 20 Hz
A	0 - 5 Hz	0 - 10 Hz
B	0 - 2.5 Hz	0 - 5 Hz
C	0 - 1.25 Hz	0 - 2.5 Hz
D	0 - 36 pulses/min.	0 - 1.25 Hz
E	0 - 18 pulses/min.	0 - 36 pulses/min.
F	0 - 9 pulses/min.	0 - 18 pulses/min.

• Middle Range Frequency Open Collector & 5V Pulse

SW No.	SPAN RANGE	
	MIN. (50%)	MAX. (100%)
0	Not Used	Not Used
1	Not Used	Not Used
2	Not Used	Not Used
3	Not Used	Not Used
4	Not Used	Not Used
5	0 – 156 Hz	0 – 312 Hz
6	0 – 78 Hz	0 – 156 Hz
7	0 – 39 Hz	0 – 78 Hz
8	0 – 20 Hz	0 – 39 Hz
9	0 – 10 Hz	0 – 20 Hz
A	0 – 5 Hz	0 – 10 Hz
B	0 – 2.5 Hz	0 – 5 Hz
C	0 – 1.25 Hz	0 – 2.5 Hz
D	0 – 36 pulses/min.	0 – 1.25 Hz
E	0 – 18 pulses/min.	0 – 36 pulses/min.
F	0 – 9 pulses/min.	0 – 18 pulses/min.

Line voltage effect: ± 0.1 % over voltage range

Insulation resistance: ≥ 100 M Ω with 500 V DC

Dielectric strength: 2000 V AC @1 minute (input to output to power to ground)

• Relay Contact, Low-Freq. Open Collector & 5V Pulse, 24V Pulse

SW No.	SPAN RANGE	
	MIN. (50%)	MAX. (100%)
0	0 – 65 pulses/min.	0 – 130 pulses/min.
1	0 – 32 pulses/min.	0 – 65 pulses/min.
2	0 – 16 pulses/min.	0 – 32 pulses/min.
3	0 – 8 pulses/min.	0 – 16 pulses/min.
4	0 – 4 pulses/min.	0 – 8 pulses/min.
5	0 – 2 pulses/min.	0 – 4 pulses/min.
6	0 – 1 pulses/min.	0 – 2 pulses/min.
7	0 – 0.5 pulses/min.	0 – 1 pulses/min.
8	0 – 0.25 pulses/min.	0 – 0.5 pulses/min.
9	0 – 8 pulses/hour	0 – 0.25 pulses/min.
A	0 – 4 pulses/hour	0 – 8 pulses/hour
B	0 – 2 pulses/hour	0 – 4 pulses/hour
C	0 – 1 pulses/hour	0 – 2 pulses/hour
D	0 – 0.5 pulses/hour	0 – 1 pulses/hour
E	0 – 0.24 pulses/hour	0 – 0.5 pulses/hour
F	0 – 0.12 pulses/hour	0 – 0.24 pulses/hour

INSTALLATION

Power input

• **AC:** Operational voltage range: rating ± 10 %, 50/60 ± 2 Hz, approx. 2 VA

• **DC:** operational voltage range: rating ± 10 % (ripple 10 %p-p max.)

approx. 2 W (70 mA at 24 V)

Operating temperature: -5 to +55°C (23 to 131°F)

Operating humidity: 30 to 90 %RH (non-condensing)

Mounting: Surface or DIN rail


Weight: 350 g (0.77 lb)

PERFORMANCE in percentage of span


Accuracy: ± 0.25 %

Temp. coefficient: ± 0.05 %/°C (± 0.03 %/°F)

EXTERNAL VIEW

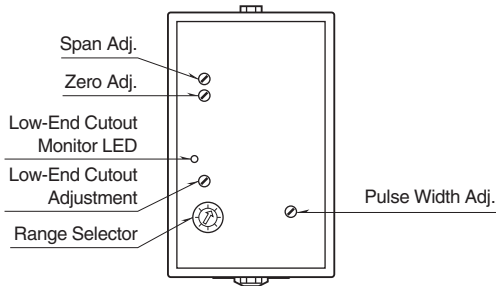


EXTERNAL DIMENSIONS unit: mm [inch]

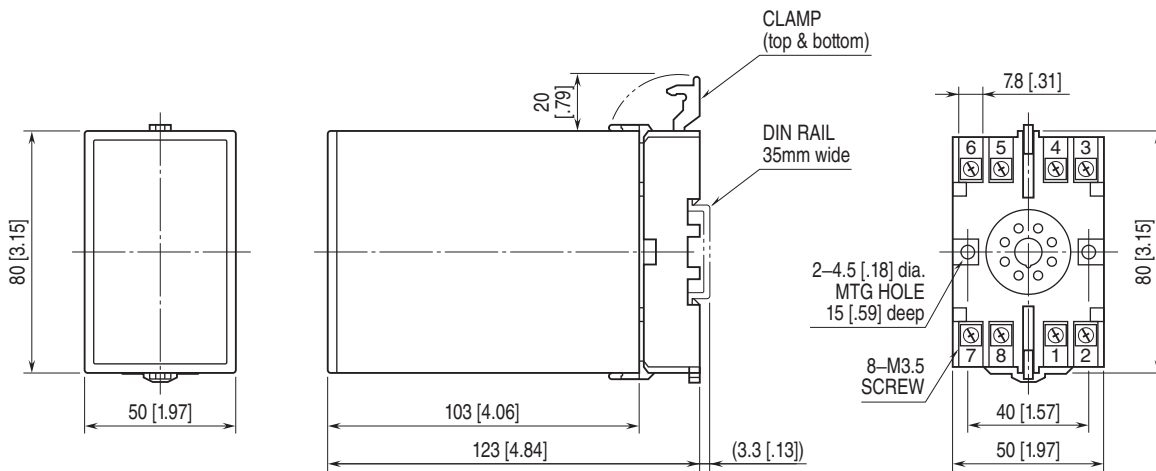


• When mounting, no extra space is needed between units.

TERMINAL ASSIGNMENTS unit: mm [inch]

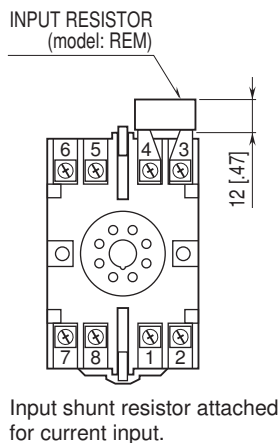


SCHEMATIC CIRCUITRY & CONNECTION DIAGRAM

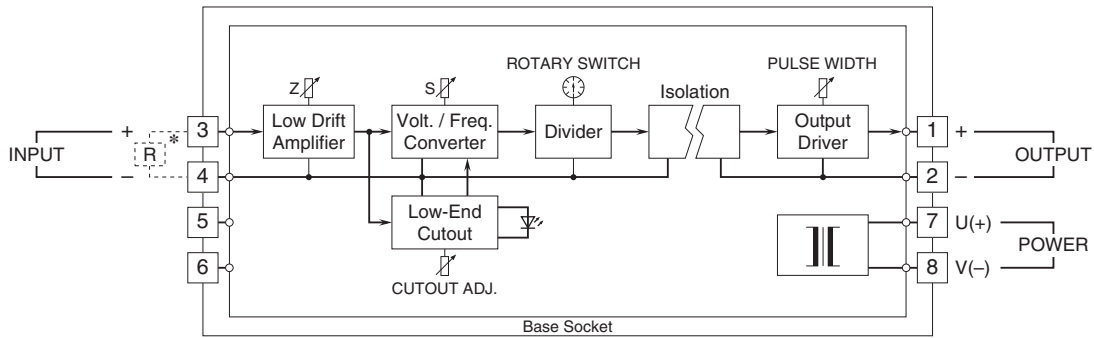


*Input shunt resistor attached for current input.

Output Connection Examples

■ Open Collector

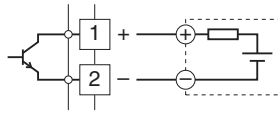


■ Voltage Pulse

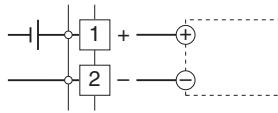


■ Relay

•AC Powered

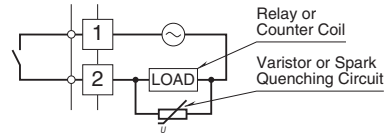

•DC Powered

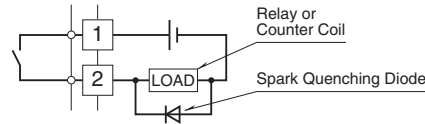

Specifications are subject to change without notice.