

**Plug-in Signal Conditioners K-UNIT**

**POWER FACTOR TRANSDUCER**


(self-powered)

**Functions & Features**

- Providing a DC output signal in proportion to power factor
- DC output containing little ripple is ideal for computer input
- Isolation up to 2000 V AC
- High-density mounting

**Typical Applications**

- Centralized monitoring and control of power management system in a manufacturing facility or building
- Measuring power factor for a motor



**MODEL: KEPFN-[1][2][3][4][5]**

**ORDERING INFORMATION**

- Code number: KEPFN-[1][2][3][4][5]
- Specify a code from below for each of [1] through [5].  
(e.g. KEPFN-11PA/Q)
- Special output range (For codes Z & 0)
- Specify the specification for option code /Q  
(e.g. /C01/S01)

**[1] CONFIGURATION**

- 1: 3-phase / 3-wire
- 4: 3-phase / 4-wire

**[2] INPUT (balanced load)**

- 1: 110 V / 5 A AC
- 2: 110 V / 1 A AC
- 3: 220 V / 1 A AC
- 4: 220 V / 5 A AC
- 5: 220 V / 380 V / 1 A AC (3-phase / 4-wire)
- 6: 220 V / 380 V / 5 A AC (3-phase / 4-wire)
- 7: 110 V / 190 V / 1 A AC (3-phase / 4-wire)
- 8: 110 V / 190 V / 5 A AC (3-phase / 4-wire)

**[3] OUTPUT SIGNAL POLARITY**

- P: Negative in lag, positive in lead
- M: Negative in lead, positive in lag

**[4] OUTPUT**

Current

- A: 4 - 20 mA DC (Load resistance 600 Ω max.)
- B: 2 - 10 mA DC (Load resistance 1200 Ω max.)
- C: 1 - 5 mA DC (Load resistance 2400 Ω max.)
- D: 0 - 20 mA DC (Load resistance 600 Ω max.)
- E: 0 - 16 mA DC (Load resistance 750 Ω max.)
- F: 0 - 10 mA DC (Load resistance 1200 Ω max.)
- G: 0 - 1 mA DC (Load resistance 12 kΩ max.)
- GW: -1 - +1 mA DC (Load resistance 10 kΩ max.)
- Z: Specify current (See OUTPUT SPECIFICATIONS)

Voltage

- 1: 0 - 10 mV DC (Load resistance 10 kΩ min.)
- 2: 0 - 100 mV DC (Load resistance 100 kΩ min.)
- 3: 0 - 1 V DC (Load resistance 1000 Ω min.)
- 4: 0 - 10 V DC (Load resistance 10 kΩ min.)
- 5: 0 - 5 V DC (Load resistance 5000 Ω min.)
- 6: 1 - 5 V DC (Load resistance 5000 Ω min.)
- 1W: -10 - +10 mV DC (Load resistance 10 kΩ min.)
- 2W: -100 - +100 mV DC (Load resistance 100 kΩ min.)
- 3W: -1 - +1 V DC (Load resistance 1000 Ω min.)
- 4W: -10 - +10 V DC (Load resistance 10 kΩ min.)
- 5W: -5 - +5 V DC (Load resistance 5000 Ω min.)
- 0: Specify voltage (See OUTPUT SPECIFICATIONS)

**[5] OPTIONS**

- blank: none
- /Q: With options (specify the specification)

**SPECIFICATIONS OF OPTION: Q (multiple selections)**

- COATING (For the detail, refer to our web site.)
- /C01: Silicone coating
- /C02: Polyurethane coating
- /C03: Rubber coating
- TERMINAL SCREW MATERIAL
- /S01: Stainless steel

**GENERAL SPECIFICATIONS**

- Construction: Plug-in
- Connection: M3.5 screw terminals
- Screw terminal: Chromated steel (standard) or stainless steel
- Housing material: Flame-resistant resin (black)
- Isolation: Voltage input to current input to output
- Computation: Phase angle detection
- Overrange output: Approx. -10 to +120 % at 1 - 5 V

Zero adjustment: -5 to +5 % (front)  
 Span adjustment: 95 to 105 % (front)

## INPUT SPECIFICATIONS

A device which employs different measuring methods may show different outputs from ours.

Frequency: 50 or 60 Hz

### • Voltage Input

Input burden: 2.5 VA

Operational range: 85 - 110 % of rating

Overload capacity: 150 % of rating for 10 sec., 110 % continuous

### • Current Input

Input burden:

0.1 VA (input 1A)

0.5 VA (input 5A)

Operational range: 10 - 120 % of rating

Overload capacity: 1000 % of rating for 3 sec., 200 % for 10 sec., 120 % continuous

### ■ Input range:

Lag 0.5 - 1 - lead 0.5

Lead 0.5 - 1 - lag 0.5

## OUTPUT SPECIFICATIONS

■ DC Current: 0 - 20 mA DC and  $\pm 1$  mA

Minimum span: 1 mA

Offset: Max. 1.5 times span

Load resistance: Output drive 12 V max.

■ DC Voltage: -10 - +12 V DC


Minimum span: 5 mV

Offset: Max. 1.5 times span


Load resistance: Output drive 1 mA max. at  $\geq 0.5$  V

### ■ OPERATION DIAGRAM (example)

#### • Negative in lag, positive in lead

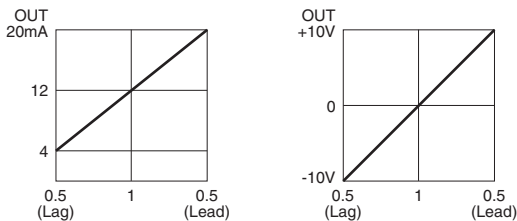

#### • Negative in lead, positive in lag

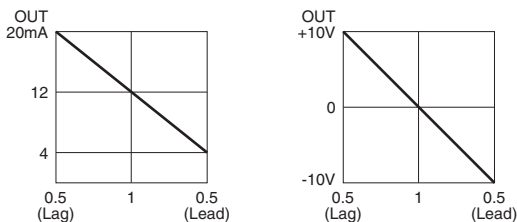

Note: When there is 5% or less of rated input current, the output may become unstable (hunting).

## INSTALLATION

Operating temperature: -10 to +55°C (14 to 131°F)

Operating humidity: 30 to 85 %RH (non-condensing)

Mounting: Surface or DIN rail

Weight: 400 g (0.88 lb)

## PERFORMANCE in percentage of span

Accuracy:  $\pm 2$  % with input 1 - 0.866, balanced load

$\pm 4$  % with input 0.866 - 0.5, balanced load (at 23°C  $\pm 10$ °C or 73.4°F  $\pm 18$ °F, 45 - 65 Hz)

Response time:  $\leq 2$  sec. (0 - 100 %  $\pm 1$  %)

Ripple: 0.5 %p-p max.


Insulation resistance:  $\geq 100$  M $\Omega$  with 500 V DC

Dielectric strength: 2000 V AC @ 1 minute (voltage input to current input to output to ground)

Impulse withstand voltage: 1.2 / 50  $\mu$ sec.,  $\pm 5$  kV (input to output or ground)


## CONNECTION DIAGRAM

### ■ 3-PHASE/3-WIRE

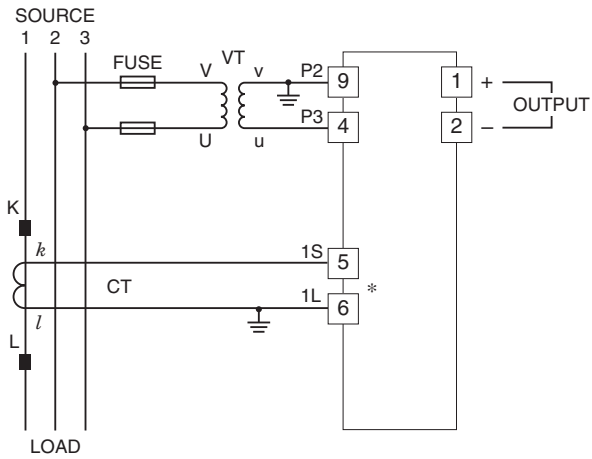


\*CT Protector (model: CTM) attached to these terminals.

### ■ 3-PHASE/4-WIRE

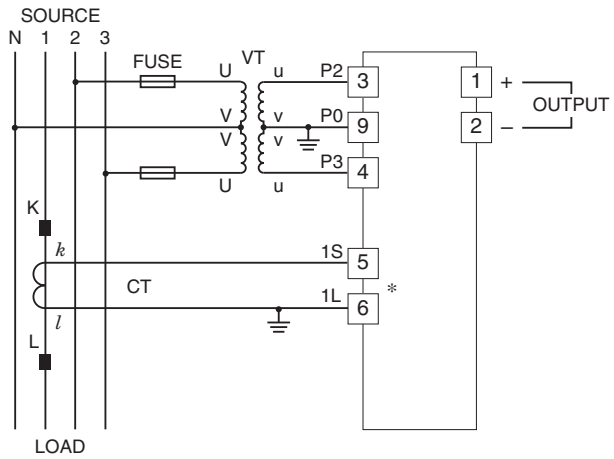


\*CT Protector (model: CTM) attached to these terminals.

## EXTERNAL DIMENSIONS unit: mm [inch]

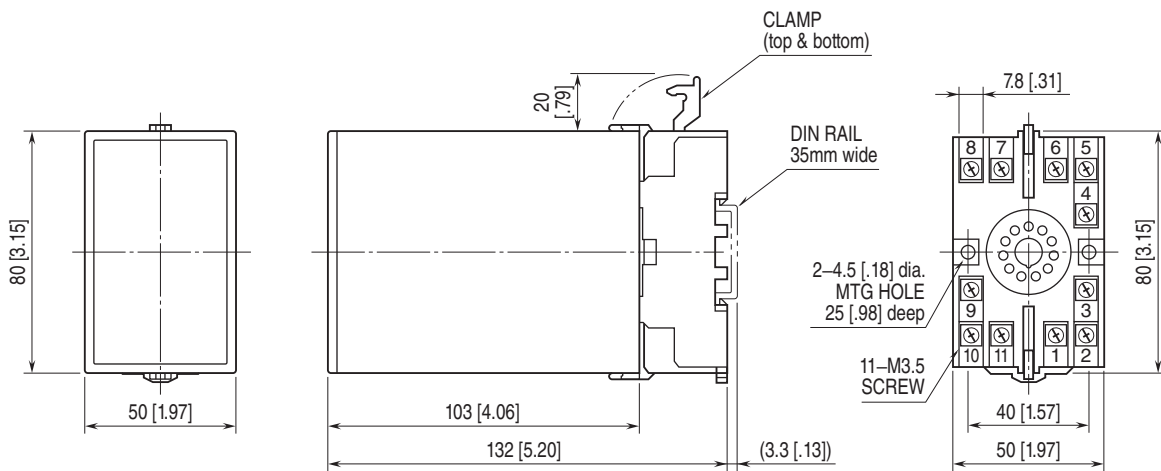

• When mounting, no extra space is needed between units.

## TERMINAL ASSIGNMENTS unit: mm [inch]

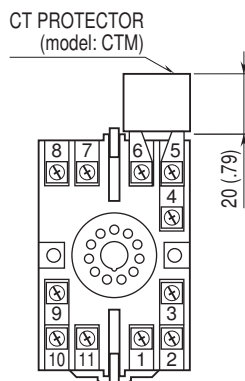



Specifications are subject to change without notice.