

Plug-in Signal Conditioners K-UNIT

LOW FREQUENCY TRANSMITTER


(50 Hz minimum)

Functions & Features

- Converting the output from a pulse-type transducer into standard process signal
- Isolation up to 2000 V AC
- High-density mounting

Typical Applications

- Positive displacement flowmeters, turbine flowmeters and vortex flowmeters
- Proximity switches

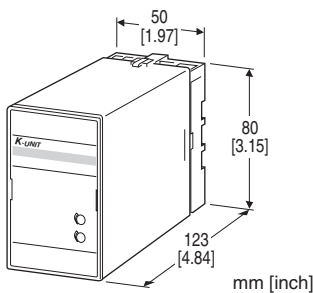

MODEL: KSP-[1][2]-[3][4]

ORDERING INFORMATION

- Code number: KSP-[1][2]-[3][4]
- Specify a code from below for each of [1] through [4]. (e.g. KSP-2A-B/DN/Q)
- Input frequency range (e.g. 0 - 10 kHz)
- Special output range (For codes Z & 0)
- Specify the specification for option code /Q (e.g. /C01/S01)

[1] INPUT

- 1: Dry contact
- 2: Voltage pulse

[2] OUTPUT

Current

- A: 4 - 20 mA DC (Load resistance 750 Ω max.)
- B: 2 - 10 mA DC (Load resistance 1500 Ω max.)
- C: 1 - 5 mA DC (Load resistance 3000 Ω max.)
- D: 0 - 20 mA DC (Load resistance 750 Ω max.)
- E: 0 - 16 mA DC (Load resistance 900 Ω max.)
- F: 0 - 10 mA DC (Load resistance 1500 Ω max.)
- G: 0 - 1 mA DC (Load resistance 15 kΩ max.)
- Z: Specify current (See OUTPUT SPECIFICATIONS)

Voltage

- 1: 0 - 10 mV DC (Load resistance 10 kΩ min.)
- 2: 0 - 100 mV DC (Load resistance 100 kΩ min.)
- 3: 0 - 1 V DC (Load resistance 100 Ω min.)
- 4: 0 - 10 V DC (Load resistance 1000 Ω min.)
- 5: 0 - 5 V DC (Load resistance 500 Ω min.)
- 6: 1 - 5 V DC (Load resistance 500 Ω min.)
- 4W: -10 - +10 V DC (Load resistance 2000 Ω min.)
- 5W: -5 - +5 V DC (Load resistance 1000 Ω min.)
- 0: Specify voltage (See OUTPUT SPECIFICATIONS)

[3] POWER INPUT

AC Power

- B: 100 V AC
- C: 110 V AC
- D: 115 V AC
- F: 120 V AC
- G: 200 V AC
- H: 220 V AC
- J: 240 V AC

DC Power

- S: 12 V DC
- R: 24 V DC

[4] OPTIONS (multiple selections)

Low-end Cutout

- blank: With
- /DN: Without

Other Options

- blank: none
- /Q: Option other than the above (specify the specification)

SPECIFICATIONS OF OPTION: Q (multiple selections)

COATING (For the detail, refer to our web site.)

- /C01: Silicone coating
- /C02: Polyurethane coating
- /C03: Rubber coating

TERMINAL SCREW MATERIAL

- /S01: Stainless steel

GENERAL SPECIFICATIONS

Construction: Plug-in

Connection: M3.5 screw terminals

Screw terminal: Chromated steel (standard) or stainless steel

Housing material: Flame-resistant resin (black)

Isolation: Input to output to power

Overrange output: 0 to 120 % at 1 - 5 V

Zero adjustment: -5 to +5 % (front)

Span adjustment: 95 to 105 % (front)

Low-end cutout: 2 to 5 %

(For /DN option, the output signal may fluctuate when the input signal is less than 5 %.)

to power to ground)

INPUT SPECIFICATIONS

Frequency range: 0 - 50 Hz through 10 kHz

Pulse width (time) requirement: Duty ratio 20 - 80 % at 100 % input

■ **Dry Contact:** Mechanical contact or open collector

Sensing: Approx. 7.5 V DC @1 mA

ON/OFF level: $\leq 200 \Omega / 0.6 \text{ V}$ for ON, $\geq 100 \text{ k}\Omega / 2 \text{ V}$ for OFF

■ **Voltage Pulse:** Square or sine waveforms

Pulse sensing: Capacitor coupled; detecting pulse rise

Input amplitude: 2 - 50 Vp-p

Input impedance: 100 k Ω min.

OUTPUT SPECIFICATIONS

■ **DC Current:** 0 - 20 mA DC

Minimum span: 1 mA

Offset: Max. 1.5 times span

Load resistance: Output drive 15 V max.

■ **DC Voltage:** -10 - +12 V DC

Minimum span: 5 mV

Offset: Max. 1.5 times span

Load resistance: Output drive 10 mA max.; 5 mA for negative voltage output; at $\geq 0.5 \text{ V}$

INSTALLATION

Power input

• **AC:** Operational voltage range: rating $\pm 10 \%$, 50/60 ± 2 Hz, approx. 2.5 VA

• **DC:** Operational voltage range: rating $\pm 10 \%$, ripple 10% p-p max.; approx. 2.5 W (100 mA at 24 V)

Operating temperature: -5 to +55°C (23 to 131°F)

Operating humidity: 30 to 90 %RH (non-condensing)

Mounting: Surface or DIN rail

Weight: 350 g (0.77 lb)

PERFORMANCE in percentage of span

Accuracy: $\pm 0.3 \%$ (output 10 - 100 %)

Temp. coefficient: $\pm 0.02 \%/^{\circ}\text{C}$ ($\pm 0.01 \%/^{\circ}\text{F}$)

Response time: (0 - 90 %)

Approx. 2 sec. for 0 - 50 Hz

Approx. 1 sec. for 0 - 100 Hz

Approx. 0.5 sec. for 0 - 500 Hz

Approx. 0.5 sec. for 0 - 10 kHz


Ripple: 0.2 %p-p max. with input $\geq 10 \%$

Line voltage effect: $\pm 0.1 \%$ over voltage range

Insulation resistance: $\geq 100 \text{ M}\Omega$ with 500 V DC


Dielectric strength: 2000 V AC @1 minute (input to output)

EXTERNAL DIMENSIONS & TERMINAL ASSIGNMENTS unit: mm [inch]

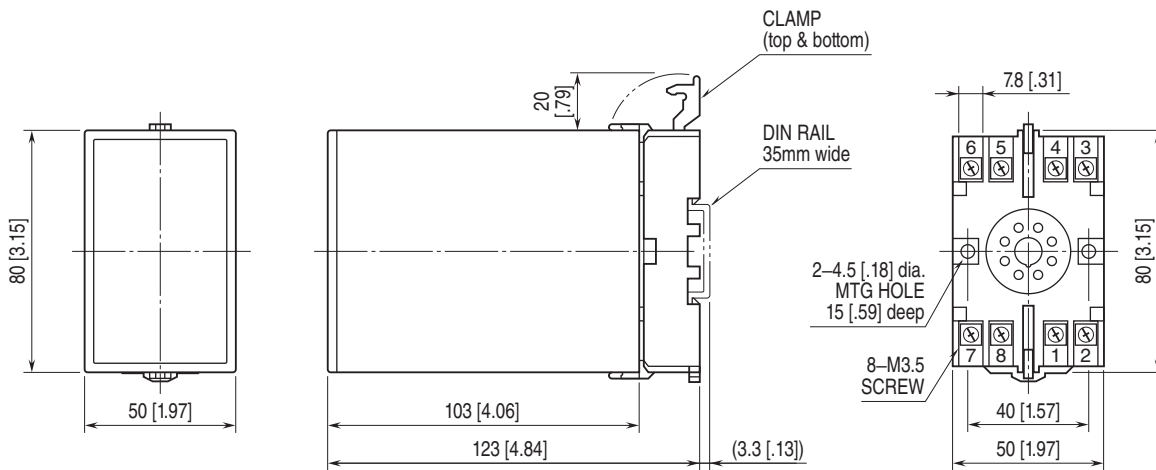


• When mounting, no extra space is needed between units.

SCHEMATIC CIRCUITRY & CONNECTION DIAGRAM

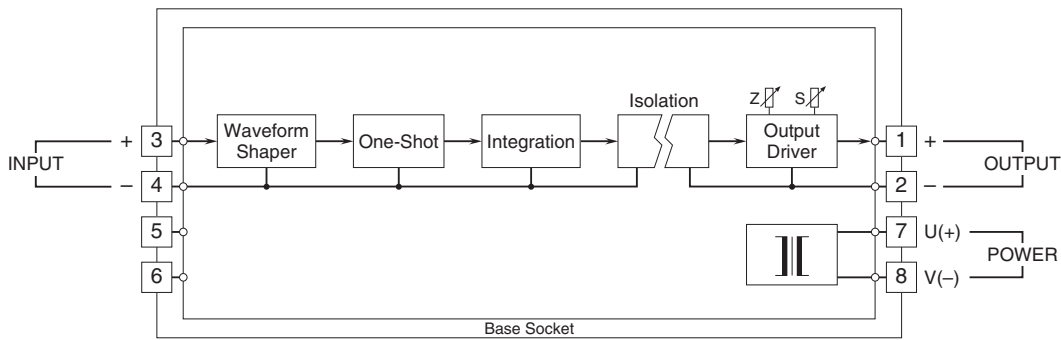


Input Connection Examples

■ Dry Contact

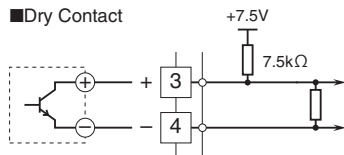

■ Voltage Pulse



Specifications are subject to change without notice.