


## Remote I/O R80 Series

### DC VOLTAGE OUTPUT MODULE, 4 points

(4 points, non-isolated, Tension clamp terminal block)

#### Functions & Features

- 4 points DC voltage output remote I/O module
- Non-isolated
- Tension clamp terminal block

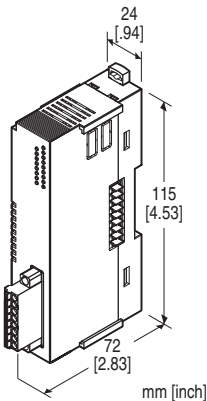

### MODEL: R80YVT4N[1]

#### ORDERING INFORMATION

- Code number: R80YVT4N[1]  
Specify a code from below for [1].  
(e.g. R80YVT4N/Q)
- Specify the specification for option code /Q  
(e.g. /C01)

#### [1] OPTIONS

**blank:** none

**/Q:** With options (specify the specification)

#### SPECIFICATIONS OF OPTION: Q

COATING (For the detail, refer to our web site.)

**/C01:** Silicone coating

**/C02:** Polyurethane coating

#### RELATED PRODUCTS

- PC configurator software (model: R80CFG)  
Downloadable at our web site.  
For connecting to PC, use commercially available Mini-B type USB cable. (provided by user)

#### GENERAL SPECIFICATIONS

**Connection**

**Output:** Separable tension clamp terminal

**Internal bus, internal power:** Connected to internal bus connector

**Housing material:** Flame-resistant resin (black)

**Isolation:** Output 1-4 to excitation supply to internal bus or internal power to FE

**Output setting:** Scaling is configurable individually for each 4 points with configurator software (model: R80CFG)

**Module address:** With DIP switch

**Terminating resistor:** Built-in (DIP Switch, default: disable)

**Status indicator:** Bi-color (red/green) LED; Refer to the instruction manual.

**Output status indicators:** Red LED; Refer to the instruction manual.

#### OUTPUT

**Output range:** Selectable between -10 - +10 V DC

**Operational range:** -5 - +105 % (in percentage of output range)

**Load resistance:**  $\geq 5 \text{ k}\Omega$

#### INSTALLATION

**Current consumption:** 210 mA

**Operating temperature:** -10 to +55°C (14 to 131°F)

**Storage temperature:** -10 to +55°C (14 to +131°F)

**Operating humidity:** 10 to 90 %RH (non-condensing)

**Atmosphere:** No corrosive gas or heavy dust

**Mounting:** DIN rail

**Weight:** 105 g (0.23 lb)

#### PERFORMANCE

**Conversion accuracy (in percentage of output range)**

$\pm 0.05 \%$  (@ output range -10 - +10 V)

Conversion accuracy is inversely proportional to output span.

**Conversion rate:** 1 msec.

**Output circuit time constant:**  $\leq 1 \text{ msec.}$  (0  $\rightarrow$  90 %)

**Data range:** 0 - 10000 of the output range

(Scaling of converted data is configurable with the configurator software)

**Temp. coefficient:**  $\pm 0.015 \%/^{\circ}\text{C}$  ( $\pm 0.008 \%/^{\circ}\text{F}$ )

**Insulation resistance:**  $\geq 100 \text{ M}\Omega$  with 500 V DC

**Dielectric strength:**

1500 V AC @ 1 minute (output1 - 4 to exc. supply to internal bus or internal power to ground)

#### CALCULATION EXAMPLES OF CONVERSION ACCURACY

When output range is 1 - 5 V: conversion accuracy = output span standard value (20 V)  $\div$  output span (4 V)  $\times$  0.05(%) = 0.25 (%).

output span standard value is the same as the span at

output range -10 - +10 V DC.

## STANDARDS & APPROVALS

EU conformity:

EMC Directive


EMI EN 61000-6-4

EMS EN 61000-6-2


RoHS Directive

## EXTERNAL VIEW


### LEFT VIEW

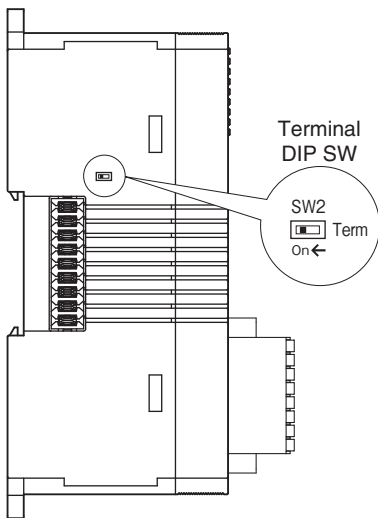

### FRONT VIEW

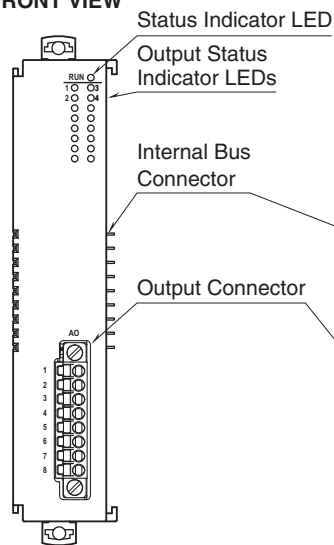

### RIGHT VIEW

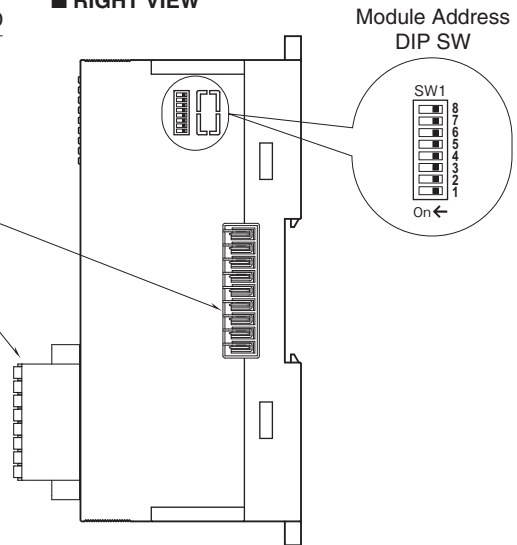

## CONNECTION DIAGRAMS

### Tension clamp terminal block

Unit side connector: MC1,5/8-GF-3,5 (Phoenix Contact)

Applicable connector: FMC1,5/8-STF-3,5 (Phoenix Contact)

Applicable wire size: 0.2 – 1.5 mm<sup>2</sup>

Stripped length: 10 mm

### Recommended solderless terminal

- AI0,25–10YE 0.25 mm<sup>2</sup> (Phoenix Contact)
- AI0,34–10TQ 0.34 mm<sup>2</sup> (Phoenix Contact)
- AI0,5–10WH 0.5 mm<sup>2</sup> (Phoenix Contact)
- AI0,75–10GY 0.75 mm<sup>2</sup> (Phoenix Contact)
- A1–10 1.0 mm<sup>2</sup> (Phoenix Contact)
- A1,5–10 1.5 mm<sup>2</sup> (Phoenix Contact)

## OPERATING MODE SETTING

(\*) factory default setting

Note: Be sure to set unused SW1-5 to 8 to OFF.

### · Module Address Setting

Configure the module address with DIP switch.


0-15 are available for module address.

MODULE ADDRESS	SW1			
	1	2	3	4
0(*)	OFF	OFF	OFF	OFF
1	ON	OFF	OFF	OFF
2	OFF	ON	OFF	OFF
3	ON	ON	OFF	OFF
4	OFF	OFF	ON	OFF
5	ON	OFF	ON	OFF
6	OFF	ON	ON	OFF
7	ON	ON	ON	OFF
8	OFF	OFF	OFF	ON
9	ON	OFF	OFF	ON
10	OFF	ON	OFF	ON
11	ON	ON	OFF	ON
12	OFF	OFF	ON	ON
13	ON	OFF	ON	ON
14	OFF	ON	ON	ON
15	ON	ON	ON	ON

### · Terminator Setting


Terminator	SW2
Disabled (*)	OFF
Enabled	ON

## TERMINAL ASSIGNMENTS




PIN NO.	ID	FUNCTION
1	Ao1+	Output 1 (+)
2	Ao1-	Output 1 (-)
3	Ao2+	Output 2 (+)
4	Ao2-	Output 2 (-)
5	Ao3+	Output 3 (+)
6	Ao3-	Output 3 (-)
7	Ao4+	Output 4 (+)
8	Ao4-	Output 4 (-)

## EXTERNAL DIMENSIONS unit: mm [inch]

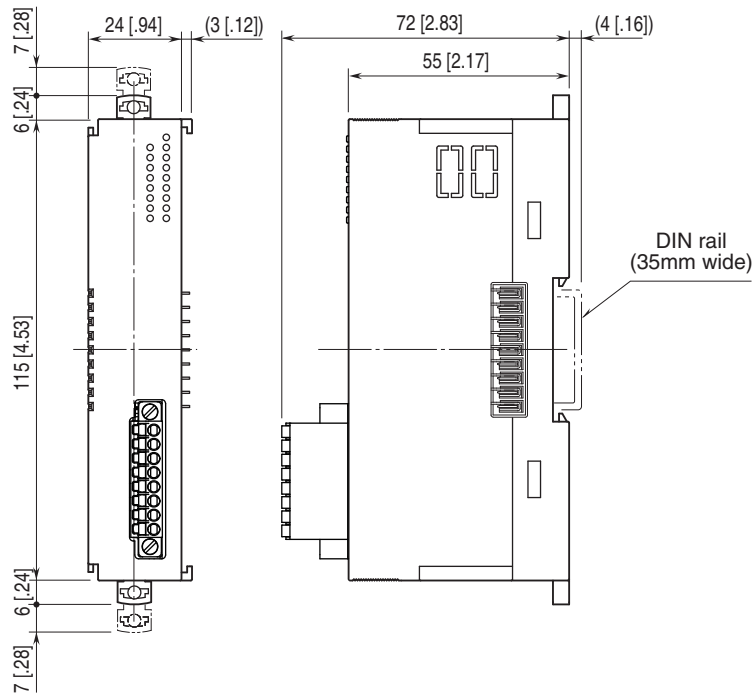

## SCHEMATIC CIRCUITRY & CONNECTION DIAGRAM

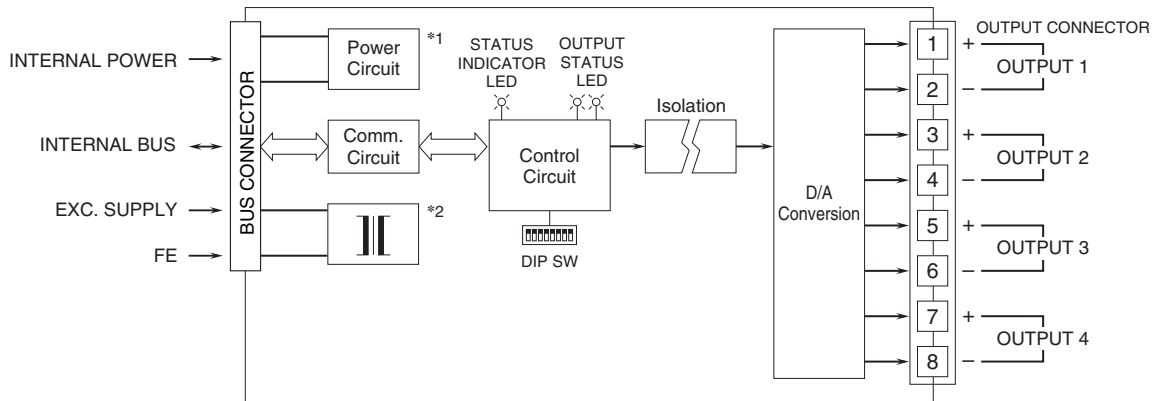

\*1. The power supply for control circuit, which is non-isolated from internal power.

\*2. The power supply for output 1 through output 4, which is isolated from the Exc. supply and the internal power.



Specifications are subject to change without notice.