


STRAIN GAUGE LOAD CELL

(Compression type)

Functions & Features

- Rated capacity 100 kN
- Slim type



Hysteresis: ± 0.35 % R.O.

Repeatability: ± 0.2 % R.O.

Temperature effect on zero: ± 0.005 % R.O./°C

Temperature effect on output: ± 0.01 % LOAD/°C

Insulation resistance: 1000 MΩ or more (B/E 50V DC)

MODEL: LCC-100K-B

ORDERING INFORMATION

- Code number: LCC-100K-B

GENERAL SPECIFICATIONS

Cable type: 9 dia., 4-core shielded cable, split wire at the end

Cable length: 3 m

Body material: stainless

Rated flexure: 0.1 mm or less

Natural frequency: Approx. 12 kHz

INPUT SPECIFICATIONS

Rated capacity (R.C.): 100 kN (10.2 tf)

Safe overload: 150 % R.C.

Recommended excitation voltage: 10 V

Maximum excitation voltage: 15 V

Input terminal resistance: $420 \Omega \pm 40 \Omega$

OUTPUT SPECIFICATIONS

Rated output (R.O.): 2 mV/V ± 0.5 %

Output terminal resistance: $350 \Omega \pm 5 \Omega$

INSTALLATION

Compensated temperature range: -10 to +60 °C (14 to 140 °F)

Safe temperature range: -20 to +70 °C (-4 to 158 °F)

Weight: 1.8 kg (4.0 lb)


PERFORMANCE in percentage of span

Rated output error: ± 0.5 %

Zero balance: ± 2 % R.O.

Non-linearity: ± 0.35 % R.O.

MODEL: LCC-100K-B

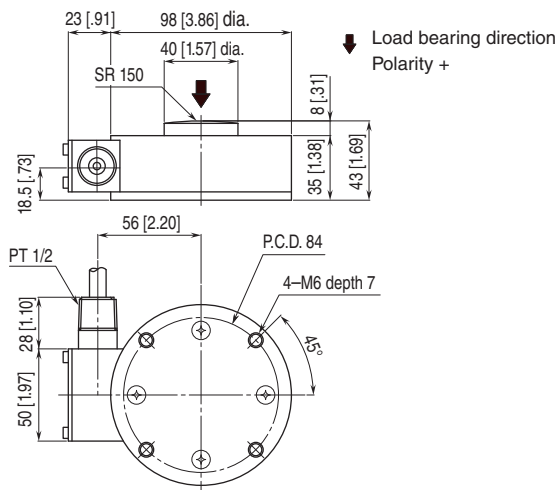EXTERNAL DIMENSIONS unit: mm [inch]

• **WIRING COLOR**

ITEM	COLOR
Excitation voltage +	Red
Excitation voltage –	White
Output signal +	Green
Output signal –	Black
Shield	Yellow



Specifications are subject to change without notice.