


STRAIN GAUGE LOAD CELL

(Compression type)

Functions & Features

- Rated capacity 200 kN
- Slim type



Hysteresis: ± 0.35 % R.O.

Repeatability: ± 0.2 % R.O.

Temperature effect on zero: ± 0.005 % R.O./ $^{\circ}\text{C}$

Temperature effect on output: ± 0.01 % LOAD/ $^{\circ}\text{C}$

Insulation resistance: 1000 M Ω or more (B/E 50V DC)

MODEL: LCC-200K-B

ORDERING INFORMATION

- Code number: LCC-200K-B

GENERAL SPECIFICATIONS

Cable type: 9 dia., 4-core shielded cable, split wire at the end

Cable length: 3 m

Body material: stainless

Rated flexure: 0.1 mm or less

Natural frequency: Approx. 11 kHz

INPUT SPECIFICATIONS

Rated capacity (R.C.): 200 kN (20.4 tf)

Safe overload: 150 % R.C.

Recommended excitation voltage: 10 V

Maximum excitation voltage: 15 V

Input terminal resistance: 420 $\Omega \pm 40 \Omega$

OUTPUT SPECIFICATIONS

Rated output (R.O.): 2 mV/V ± 0.5 %

Output terminal resistance: 350 $\Omega \pm 5 \Omega$

INSTALLATION

Compensated temperature range: -10 to +60 $^{\circ}\text{C}$ (14 to 140 $^{\circ}\text{F}$)

Safe temperature range: -20 to +70 $^{\circ}\text{C}$ (-4 to 158 $^{\circ}\text{F}$)


Weight: 4.5 kg (9.9 lb)

PERFORMANCE in percentage of span

Rated output error: ± 0.5 %

Zero balance: ± 2 % R.O.

Non-linearity: ± 0.35 % R.O.

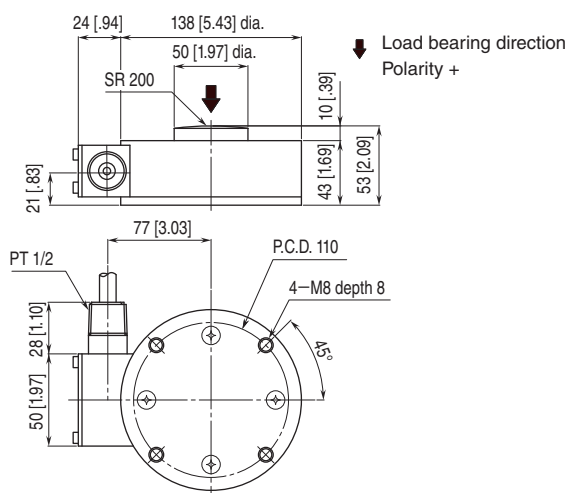EXTERNAL DIMENSIONS unit: mm [inch]

- **WIRING COLOR**

ITEM	COLOR
Excitation voltage +	Red
Excitation voltage –	White
Output signal +	Green
Output signal –	Black
Shield	Yellow



Specifications are subject to change without notice.