

CABLE

(40-pin to 26-pin)

PERFORMANCE

Dielectric strength: 500 V AC @ 1 minute

MODEL: MCN26-FR-[1]

ORDERING INFORMATION

- Code number: MCN26-FR-[1]
- Specify a code from below for [1].
(e.g. MCN26-FR-10)

CONNECTOR, SIDE A

F: OTAX
(Fujitsu ... discontinued)

CONNECTOR, SIDE B

R: Omron

[1] CABLE LENGTH

- 03:** 30 cm (11.8 in.)
05: 50 cm (19.7 in.)
10: 1 m (3.3 ft.)
30: 3 m (9.8 ft.)

RELATED PRODUCTS

- A/D converter (model: AD3V, KAD3V)
- D/A converter (model: DA3, KDA3)
- Strain gauge/digital converter (model: AD2LC)
- Multi-transmission module (model: 22LA1-3A2, 22LA1-3C2)
- Connector terminal block (model: CNT)

GENERAL SPECIFICATIONS

Connector, Side A

Connector model: OTAX N361J040AU
(Fujitsu FCN-361J040-AU...discontinued)

Cover model: OTAX N360C040B
(Fujitsu FCN-360C040-B...discontinued)

Connector, Side B

Connector model: XG5M-2635-N

Cover model: XG5S-2612


Cable: Shielded cable with 26 core wires

INSTALLATION

Weight


- MCN26-FR-03:** 80 g (0.18 lb)
MCN26-FR-05: 100 g (0.22 lb)
MCN26-FR-10: 170 g (0.37 lb)
MCN26-FR-30: 370 g (0.82 lb)

EXTERNAL DIMENSIONS & CONNECTOR PIN ASSIGNMENT unit: mm [inch]

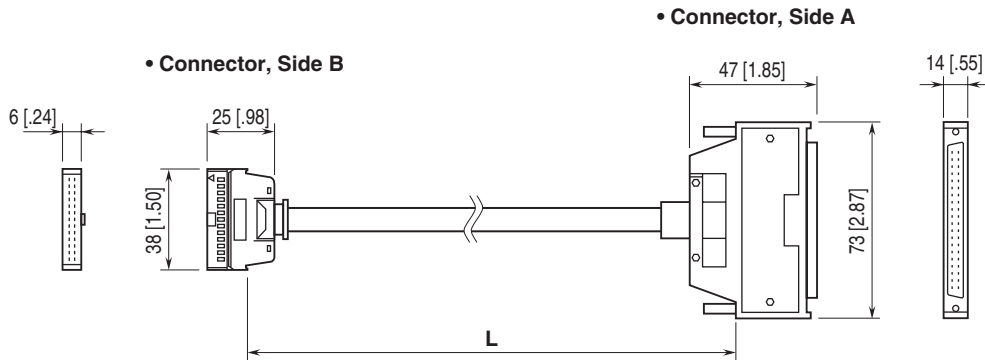


	MCN26-03	MCN26-05	MCN26-10	MCN26-30
L	30 cm [11.8 in.]	50 cm [19.7 in.]	1 m [3.3 ft.]	3 m [9.8 ft.]

CONNECTOR PIN ASSIGNMENT

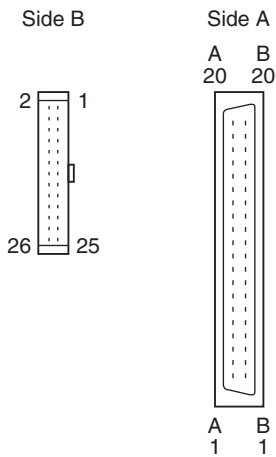

WIRING DIAGRAM

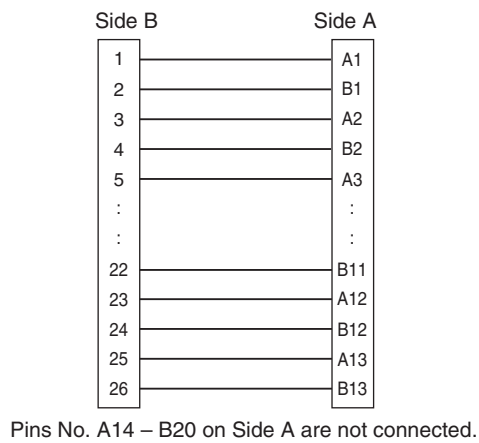

Specifications are subject to change without notice.