

## Plug-in Signal Conditioners M-UNIT

### CONTACT ISOLATOR


(18 channels)

#### Functions & Features

- Galvanically isolating the output pulse from the input signal
- 18 channels housed in one module
- Isolation between input, output and power (non-isolated between each channel)
- High-density mounting

#### Typical Applications

- Isolating and sending 4-digit BCD signals from a digital panel meter to a PLC
- Multi-point isolation for low-speed pulse or digital (status) signals

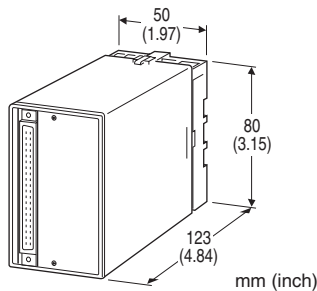

### MODEL: MNS-11[1]-[2][3]

#### ORDERING INFORMATION

- Code number: MNS-11[1]-[2][3]
- Specify a code from below for each of [1] through [3].  
(e.g. MNS-111-B/Q)
- Specify the specification for option code /Q  
(e.g. /C01/S01)

#### INPUT

1: Dry contact

#### OUTPUT

1: Open collector

#### [1] OUTPUT LOGIC

- 1: Positive logic
- 2: Negative logic

#### [2] POWER INPUT

- AC Power
- B: 100 V AC
  - C: 110 V AC
  - D: 115 V AC
  - F: 120 V AC
  - G: 200 V AC
  - H: 220 V AC
  - J: 240 V AC
- DC Power
- S: 12 V DC
  - R: 24 V DC
  - V: 48 V DC

#### [3] OPTIONS

- blank: none  
/Q: With options (specify the specification)

#### SPECIFICATIONS OF OPTION: Q (multiple selections)

COATING (For the detail, refer to our web site.)

- /C01: Silicone coating
  - /C02: Polyurethane coating
  - /C03: Rubber coating
- TERMINAL SCREW MATERIAL
- /S01: Stainless steel

#### RELATED PRODUCTS

- Connector terminal block (model: CNT)
- Special cable with 40-pin connector (model: FCN)

#### GENERAL SPECIFICATIONS

**Construction:** Plug-in

**Connection**

**Power input:** M3.5 screw terminals

**I/O:** 40-pin connector

(OTAX N365P040AU)

(Fujitsu FCN-365P040-AU...discontinued)

**Screw terminal:** Chromated steel (standard) or stainless steel

**Housing material:** Flame-resistant resin (black)

**Isolation:** Input to output to power

**Frequency range:** Input and output are the same.

#### INPUT SPECIFICATIONS

■ Dry contact

**Maximum frequency:** 100 Hz

**Pulse width time requirement:** 5 msec. min. for ON and OFF

**Sensing:** Approx. 12 V DC @ 1.5 mA

**ON/OFF level:** ≤200 Ω/0.3 V for ON, ≥100k Ω/11.1 V for OFF

## OUTPUT SPECIFICATIONS

■ Open Collector

Maximum frequency: 100 Hz

Rating: 30 V DC @ 10 mA per channel

Saturation voltage: 0.3 V DC

## INSTALLATION

Power input

• AC: Operational voltage range: rating  $\pm 10\%$ ,  
50/60  $\pm 2$  Hz, approx. 2 VA

• DC: Operational voltage range: rating  $\pm 10\%$ ,  
ripple 10 %p-p max., approx. 2 W (80 mA at 24 V)

Operating temperature: -5 to +60°C (23 to 140°F)

Operating humidity: 30 to 90 %RH (non-condensing)

Mounting: Surface or DIN rail

Weight: 400 g (0.88 lb)

## PERFORMANCE

Insulation resistance:  $\geq 100\text{ M}\Omega$  with 500 V DC


Dielectric strength: 1000 V AC @ 1 minute

(input to output to power)


2000 V AC @ 1 minute

(input or output or power to ground)


## EXTERNAL VIEW

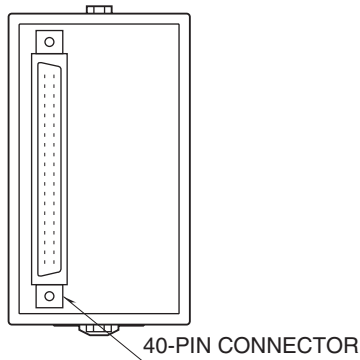

• Connector Pin Assignment




## EXTERNAL DIMENSIONS & TERMINAL ASSIGNMENTS unit: mm [inch]

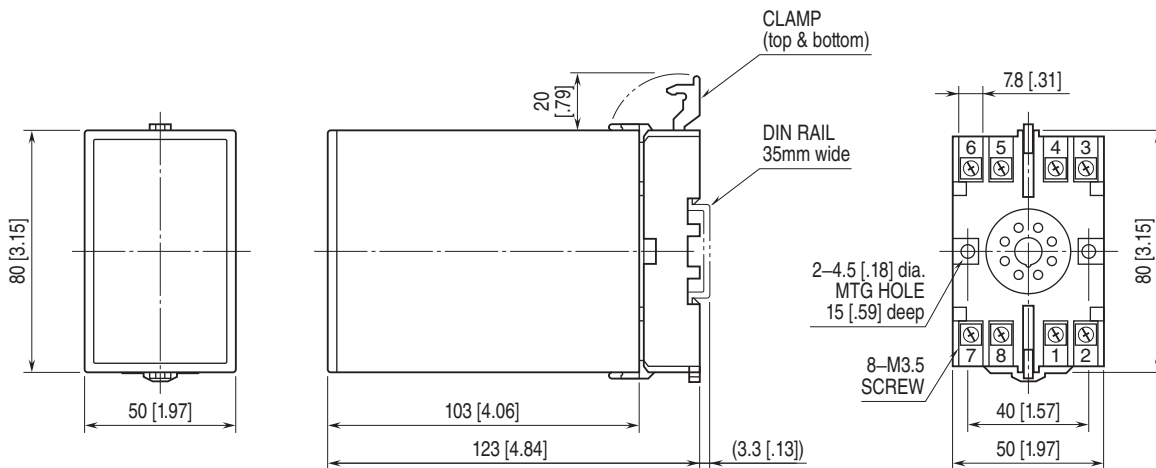

• When mounting, no extra space is needed between units.

## SCHEMATIC CIRCUITRY & CONNECTION DIAGRAM

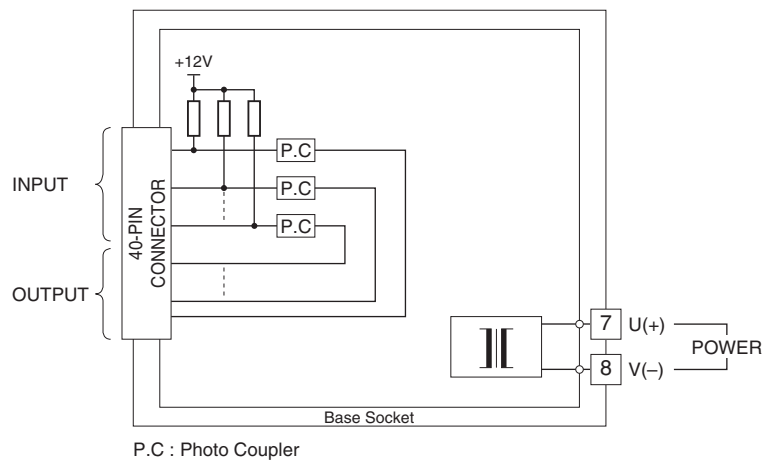

## I/O CONNECTOR PIN ASSIGNMENT

PIN NO.	INPUT NO.	PIN NO.	OUTPUT NO.	PIN NO.	INPUT NO.	PIN NO.	OUTPUT NO.
A 1	ch. 1	A11	N.C.	B 1	ch.10	B11	COM2
A 2	ch. 2	A12	ch. 1	B 2	ch.11	B12	ch.10
A 3	ch. 3	A13	ch. 2	B 3	ch.12	B13	ch.11
A 4	ch. 4	A14	ch. 3	B 4	ch.13	B14	ch.12
A 5	ch. 5	A15	ch. 4	B 5	ch.14	B15	ch.13
A 6	ch. 6	A16	ch. 5	B 6	ch.15	B16	ch.14
A 7	ch. 7	A17	ch. 6	B 7	ch.16	B17	ch.15
A 8	ch. 8	A18	ch. 7	B 8	ch.17	B18	ch.16
A 9	ch. 9	A19	ch. 8	B 9	ch.18	B19	ch.17
A10	COM1	A20	ch. 9	B10	N.C.	B20	ch.18



Specifications are subject to change without notice.