


## Euro Terminal Ultra-Slim Signal Conditioners M6D Series

**5W:** -5 – +5 V DC (Load resistance 10 kΩ min.)  
**0:** Specify voltage (See OUTPUT SPECIFICATIONS)

### FREQUENCY TRANSMITTER

#### Functions & Features

- 5.9-mm wide ultra-slim design
- Low profile allows the M6D module mounted in a 120-mm deep panel
- Converts the output from a pulse-type transducer into a standard process signal
- High-density mounting
- Power indicator LED

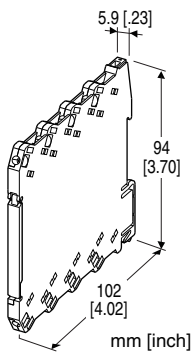

### POWER INPUT

DC Power

**R:** 24 V DC

(Operational voltage range 24 V ±10 %, ripple 10 %p-p max.)

### [3] OPTIONS

Other Options

**blank:** none

**/Q:** Option other than the above (specify the specification)

### SPECIFICATIONS OF OPTION: Q

COATING (For the detail, refer to our web site.)

**/C01:** Silicone coating

**/C02:** Polyurethane coating

### GENERAL SPECIFICATIONS

Connection

**Input and output:** Euro terminal (torque 0.3 N·m)

**Power input:** Via the Installation Base (model: M6DBS)

or Euro terminal (torque 0.3 N·m)

**Applicable wire size:** 0.2 to 2.5 mm<sup>2</sup>, stripped length 8 mm

**Housing material:** Flame-resistant resin (black)

**Isolation:** Input to output to power

**Zero adjustment:** -2 to +2 % (front)

(Output code 4W, 5W: Adjustable at 0V.)

**Span adjustment:** 98 to 102 % (front)

**Chattering protection:** Filter provided for mechanical contact input

**Power indicator LED:** Green LED turns on when the power is supplied.

### INPUT SPECIFICATIONS

■ **Open Collector**

**Frequency range:** 0 – 0.01 Hz through 100 kHz

**Pulse width time requirement:** ≥ 4 μsec. for both H and L levels

**Sensing voltage/current:** 2.5 V DC @1 mA (approx.)

**Detecting levels:** ≤ 750 Ω/0.75 V for ON;

≥ 3 kΩ/1.6 V for OFF

■ **Mechanical Contact**

**Frequency range:** 0 – 0.01 Hz through 30 Hz

**Pulse width time requirement:** ≥ 10 msec. for both ON and OFF

**Sensing voltage/current:** 2.5 V DC @1 mA (approx.)

**Detecting levels:** ≤ 750 Ω/0.75 V for ON;

≥ 3 kΩ/1.6 V for OFF

■ **Voltage Pulse**

## MODEL: M6DPA-[1][2]-R[3]

### ORDERING INFORMATION

- Code number: M6DPA-[1][2]-R[3]  
Specify a code from below for each of [1] through [3]. (e.g. M6DPA-CA-R/Q)
- Frequency range (e.g. 0 – 1 kHz)
- Special output range (For codes Z & 0)
- Specify the specification for option code /Q (e.g. /C01)

### [1] INPUT

**A1:** Open collector

**A2:** Mechanical contact

**C:** 5 V pulse (sensitivity 2 V)

**D:** 24 V pulse (sensitivity 10 V)

### [2] OUTPUT

Current

**A:** 4 – 20 mA DC (Load resistance 550 Ω max.)

**Z:** Specify current (See OUTPUT SPECIFICATIONS)

Voltage

**4:** 0 – 10 V DC (Load resistance 10 kΩ min.)

**5:** 0 – 5 V DC (Load resistance 5000 Ω min.)

**6:** 1 – 5 V DC (Load resistance 5000 Ω min.)

**4W:** -10 – +10 V DC (Load resistance 20 kΩ min.)

**Frequency range:** 0 - 0.01 Hz through 100 kHz  
**Pulse width time requirement:**  $\geq 4 \mu\text{sec.}$  for both H and L levels

**Waveform:** Square or sine

**Input impedance:**  $\geq 10 \text{ k}\Omega$

**Max. voltage between input terminals:**  $\pm 50 \text{ V}$

**Detecting H level**

5 V pulse:  $\geq 3 \text{ V}$

24 V pulse:  $\geq 14 \text{ V}$

**Detecting L level**

5 V pulse:  $\leq 1 \text{ V}$

24 V pulse:  $\leq 6 \text{ V}$

## OUTPUT SPECIFICATIONS

■ **DC Current:** 2 - 20 mA DC (and 0 - 1 mA DC)

**Minimum span:** 1 mA

**Offset:** Max. 1.5 times span

**Load resistance:** Output drive 11 V max.

■ **DC Voltage:** 0 - 10 V DC

**Minimum span:** 1 V

**Offset:** Max. 1.5 times span

**Load resistance:** Output drive 1 mA max.; at  $\geq 1 \text{ V}$

## INSTALLATION

**Power consumption:** Approx. 0.5 W

**Operating temperature:** -20 to +55°C (-4 to +131°F)

**Operating humidity:** 30 to 90 %RH (non-condensing)

**Mounting:** Installation Base (model: M6DBS) or DIN rail

**Weight:** 60 g (2.1 oz)

## PERFORMANCE in percentage of span

**Accuracy:**  $\pm 0.1 \%$

**Temp. coefficient:**  $\pm 0.015 \%/^{\circ}\text{C}$  ( $\pm 0.008 \%/^{\circ}\text{F}$ )

**Response time:** Max. 0.5 sec. + 1 pulse cycle (0 - 90 %)

**Line voltage effect:**  $\pm 0.1 \%$  over voltage range

**Insulation resistance:**  $\geq 100 \text{ M}\Omega$  with 500 V DC

**Dielectric strength:** 2000 V AC @1 minute (input to output to power to ground)

## STANDARDS & APPROVALS

**EU conformity:**

EMC Directive


EMI EN 61000-6-4

EMS EN 61000-6-2


RoHS Directive

## EXTERNAL VIEW

(With the cover open)

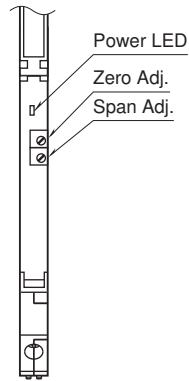


## EXTERNAL DIMENSIONS & TERMINAL ASSIGNMENTS unit: mm [inch]

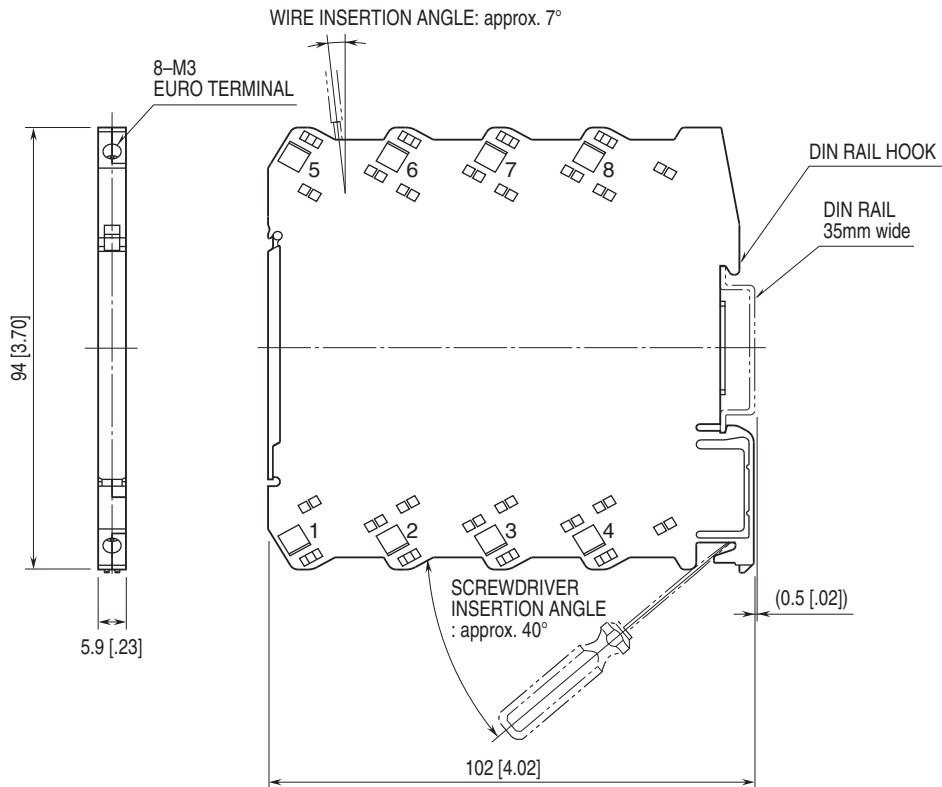


• When mounting, no extra space is needed between units.

**SCHEMATIC CIRCUITRY & CONNECTION DIAGRAM**

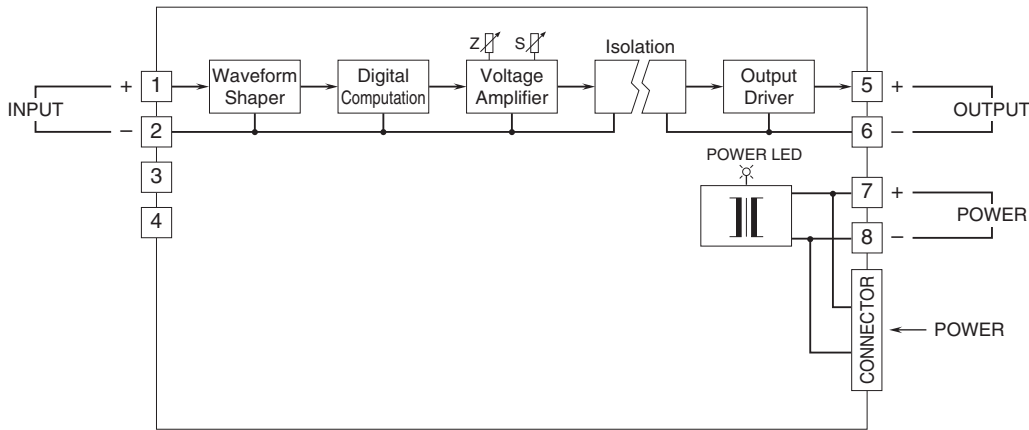


**Input Connection Examples**

■ Open Collector or Mechanical Contact

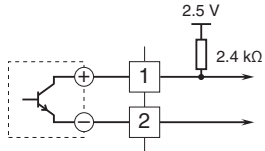

■ Voltage Pulse



Specifications are subject to change without notice.