

Euro Terminal Ultra-Slim Signal Conditioners M6D Series


PULSE ISOLATOR

Functions & Features

- 5.9-mm wide ultra-slim design
- Low profile allows the M6D module mounted in a 120-mm deep panel
- Galvanically isolates pulse rate signals
- High-density mounting
- Power indicator and input monitor LED

Typical Applications

- Isolating field pulse signals in order to reduce noises
- Changing e.g. dry contact signal to e.g. 5 V signals

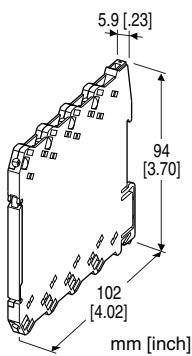

MODEL: M6DPP-[1][2][3]-R[4]

ORDERING INFORMATION

- Code number: M6DPP-[1][2][3]-R[4]
- Specify a code from below for each of [1] through [4].
(e.g. M6DPP-CMN-R/Q)
- Specify the specification for option code /Q
(e.g. /C01)

[1] INPUT

- A1:** Open collector
- A2:** Mechanical contact
- C:** 5 V pulse (sensitivity 2 V)
- D:** 12 V/24 V pulse (sensitivity 5 V)
- H:** Two-wire current pulse

[2] OUTPUT

- A1:** High frequency open collector (max. 100 kHz)
- A2:** Low frequency open collector (max. 30 Hz)
- M:** 5 V pulse
- N:** 12 V pulse
- P:** 24 V pulse

[3] OUTPUT LOGIC

- N:** The same as the input
- R:** Inverted

POWER INPUT

- DC Power**
- R:** 24 V DC
(Operational voltage range 24 V \pm 10 %, ripple 10 %p-p max.)

[4] OPTIONS

- blank:** none
- /Q:** With options (specify the specification)

SPECIFICATIONS OF OPTION: Q

- COATING** (For the detail, refer to our web site.)
- /C01:** Silicone coating
- /C02:** Polyurethane coating

GENERAL SPECIFICATIONS

Connection

- Input and output:** Euro terminal (torque 0.3 N·m)
- Power input:** Via the Installation Base (model: M6DBS)
or Euro terminal (torque 0.3 N·m)
- Applicable wire size:** 0.2 to 2.5 mm², stripped length 8 mm
- Housing material:** Flame-resistant resin (black)
- Isolation:** Input to output to power
- Chattering protection:** Filter provided for mechanical contact input
- Power indicator LED:** Green LED turns on when the power is supplied.
- Input monitor LED**
- Open collector, Mechanical contact:** Orange LED turns on when the input is ON.
- Voltage pulse, 2-wire current pulse:** Orange LED turns on when the input is high.
- Input pulse sensing:** DC coupled

INPUT SPECIFICATIONS

- Excitation:** 12 V DC @20 mA, shortcircuit protection
- **Open Collector**
- Maximum frequency:** 100 kHz
- Pulse width time requirement:** \geq 5 μ sec. for ON and OFF
- Sensing:** Approx. 11 V DC @2.4 mA
- Detecting levels:** \leq 1.8 k Ω /3 V for ON, \geq 4 k Ω /5 V for OFF
- **Mechanical Contact**
- Maximum frequency:** 30 Hz
- Pulse width time requirement:** \geq 10 msec. for ON and OFF
- Sensing:** Approx. 11 V DC @2.4 mA
- Detecting levels:** \leq 1.8 k Ω /3 V for ON, \geq 4 k Ω /5 V for OFF
- **Voltage Pulse**

Maximum frequency: 100 kHz
Pulse width time requirement: $\geq 5 \mu\text{sec.}$ for high and low levels
Waveform: Square or sine
Input impedance: $\geq 10 \text{ k}\Omega$
Max. voltage between input terminals: 50 V
Detecting H level
5 V pulse: $\geq 3 \text{ V}$
12 V, 24 V pulse: $\geq 6 \text{ V}$
Detecting L level
5 V pulse: $\leq 1 \text{ V}$
12 V, 24 V pulse: $\leq 4 \text{ V}$
■ **Two-wire Current Pulse**
Max. frequency: 100 kHz
Input resistance: Receiving resistor 200 Ω
Input range: 0 - 25 mA
Detecting levels: $\leq 5 \text{ mA}$ for Lo, $\geq 15 \text{ mA}$ for Hi

STANDARDS & APPROVALS

EU conformity:
EMC Directive
EMI EN 61000-6-4
EMS EN 61000-6-2
RoHS Directive

OUTPUT SPECIFICATIONS

■ **High Frequency Open Collector:**
50 V DC @100 mA (resistive load)
Maximum frequency: 100 kHz
Saturation voltage: 0.5 V DC
■ **Low Frequency Open Collector:**
50 V DC @100 mA (resistive load)
Maximum frequency: 30 Hz
Timer: Limits $\geq 75 \text{ msec.}$ within $75 \pm 25 \text{ msec.}$
ON time for output logic non-inverted
OFF time for output logic inverted
Saturation voltage: 0.5 V DC
■ **Voltage Pulse**
Maximum frequency: 100 kHz
High level: Rating (5, 12 or 24 V) $\pm 10 \%$
Low level: $\leq 0.5 \text{ V}$
Load resistance:
 $\geq 1.0 \text{ k}\Omega$ for 5 V
 $\geq 2.4 \text{ k}\Omega$ for 12 V
 $\geq 4.8 \text{ k}\Omega$ for 24 V

INSTALLATION


Power consumption: Approx. 1 W
Operating temperature: -20 to +55°C (-4 to +131°F)
Operating humidity: 30 to 90 %RH (non-condensing)
Mounting: Installation Base (model: M6DBS) or DIN rail
Weight: 60 g (2.1 oz)

PERFORMANCE

Insulation resistance: $\geq 100 \text{ M}\Omega$ with 500 V DC
Dielectric strength: 2000 V AC @1 minute (input to output to power to ground)

EXTERNAL VIEW


(With the cover open)

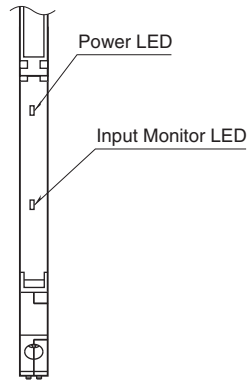

OUTPUT LOGIC


| INPUT TYPE | PULSE LOGIC | INPUT | VOLTAGE PULSE OUTPUT | OPEN COLLECTOR OUTPUT |
|---|--------------|-----------|----------------------|-----------------------|
| Voltage Pulse Input 2-wire Current Pulse Input | Non Inverted | H L | H L | OFF ON |
| | Inverted | H L | H L | OFF ON |
| Mechanical Contact Input Open Collector Input | Non Inverted | OFF ON | H L | OFF ON |
| | Inverted | OFF ON | H L | OFF ON |

EXTERNAL DIMENSIONS & TERMINAL ASSIGNMENTS unit: mm [inch]

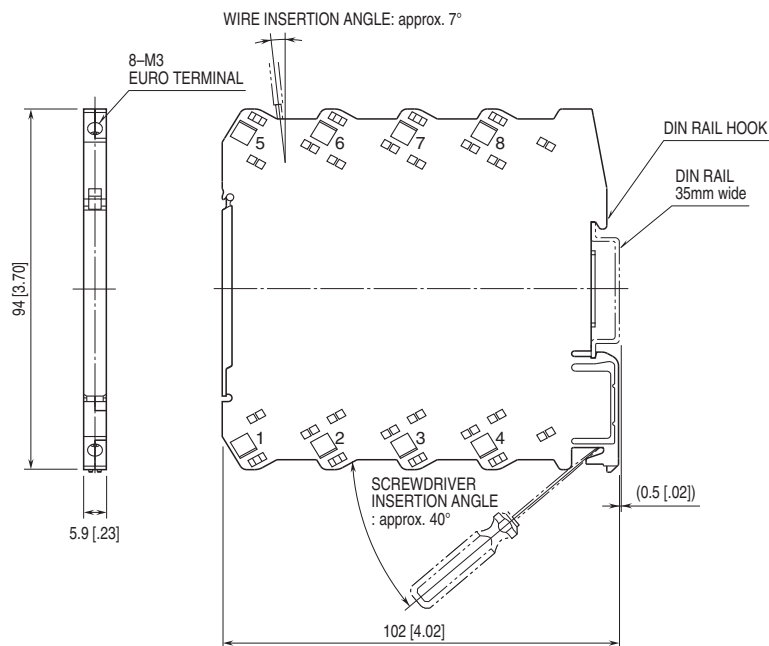

• When mounting, no extra space is needed between units.


SCHEMATIC CIRCUITRY & CONNECTION DIAGRAM

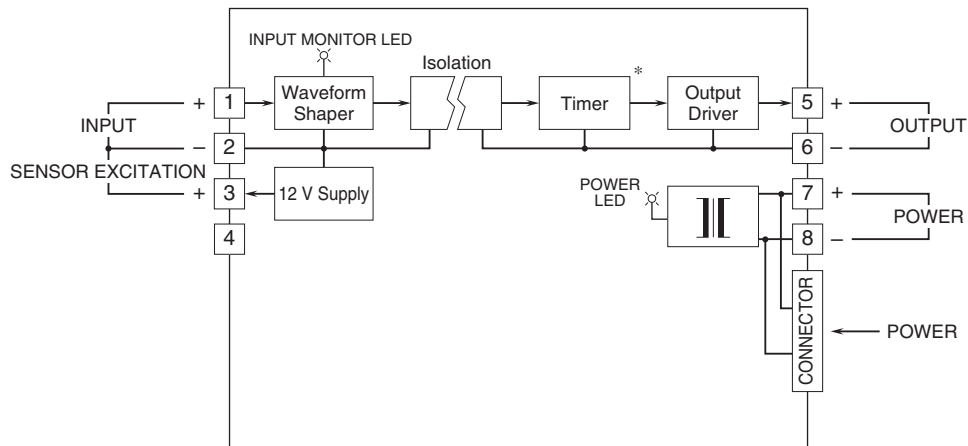


* Low freq. open collector output only.

Input Connection Examples

■ Mechanical Contact or Open Collector

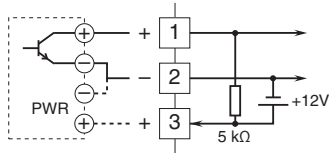


■ Voltage Pulse

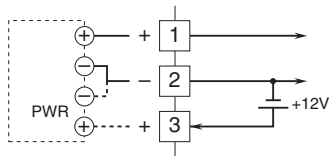


■ 2-Wire Current Pulse

• Built-in Excitation

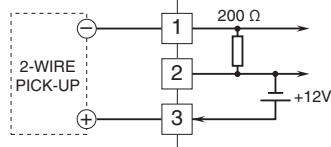


• External DC Supply

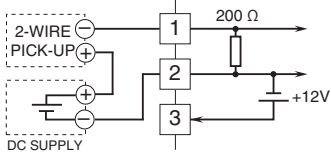


Output Connection Examples

■ Open Collector

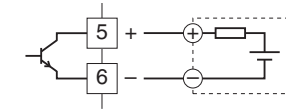

■ Voltage Pulse

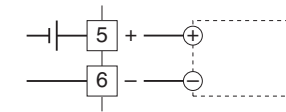

Specifications are subject to change without notice.