

**Plug-in Signal Conditioners M-UNIT**

**2-WIRE POTENTIOMETER TRANSMITTER**


(molded)

**Functions & Features**

- Providing a 4 – 20 mA DC signal proportional to a potentiometer or slidewire position input
- Constant voltage excitation allows use with pots with total resistances from 100 Ω – 2 kΩ without affecting accuracy
- Small, molded unit is suitable for being incorporated into another device

**Typical Applications**

- Tank levels
- Positions

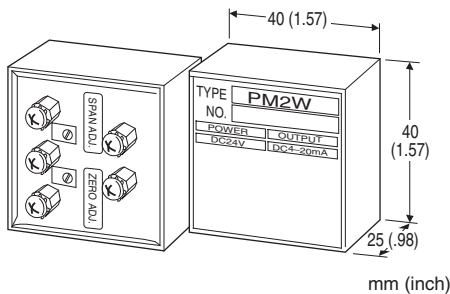

**MODEL: PM2W**

**ORDERING INFORMATION**

- Code number: PM2W

**RELATED PRODUCTS**

- Current loop supply (model: YVD)
- Mounting Frame (model: PM2W-FR)

**GENERAL SPECIFICATIONS**


**Construction:** Molded  
**Connection:** M3 screw terminals (torque 0.5 N·m)  
**Screw terminal:** Nickel-plated brass  
**Housing material:** Flame-resistant resin (black)  
**Zero adjustment:** 0 to 10 % of total resistance  
**Span adjustment:** (of total resistance)  
 135 Ω or above: 50 - 100 %  
 Below 135 Ω: 70 - 100 %

**INPUT SPECIFICATIONS**

**Potentiometer:** 100 Ω – 2 kΩ  
**Minimum span:** 50 % of total resistance (≥ 135 Ω); 70 % of total resistance (< 135 Ω)  
**Excitation:** 0.2 V DC

**OUTPUT SPECIFICATIONS**

**Output range:** 4 – 20 mA DC  
**Load resistance vs. supply voltage:**  
 Load Resistance (Ω) = (Supply Voltage (V) – 9 (V)) ÷ 0.02 (A)  
 (including leadwire resistance)

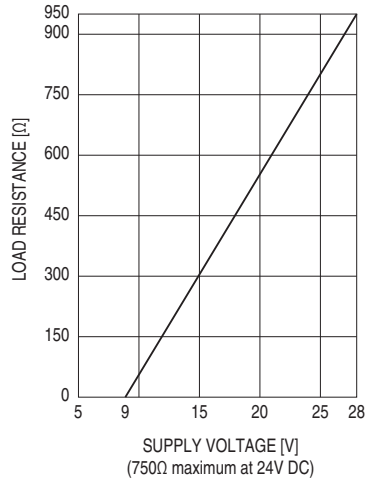


**INSTALLATION**

**Supply voltage:** 9 – 28 V DC  
**Operating temperature:** -5 to +60°C (23 to 140°F)  
**Operating humidity:** 30 to 90 %RH (non-condensing)  
**Mounting:** Surface with the Mounting Frame (model: PM2W-FR)  
**Weight:** 90 g (0.2 lb)


**PERFORMANCE in percentage of span**

**Accuracy:** ±0.2 %  
**Temp. coefficient:** ±0.015 %/°C (±0.008 %/°F)  
**Response time:** ≤ 0.1 sec. (0 – 90 %)  
**Dielectric strength:** 2000 V AC @1 minute (input or output to ground)


**EXTERNAL DIMENSIONS & TERMINAL ASSIGNMENTS** unit: mm [inch]

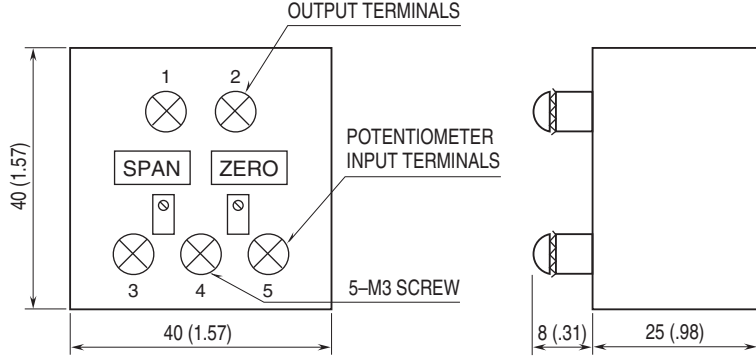

**MOUNTING REQUIREMENTS** unit: mm [inch]

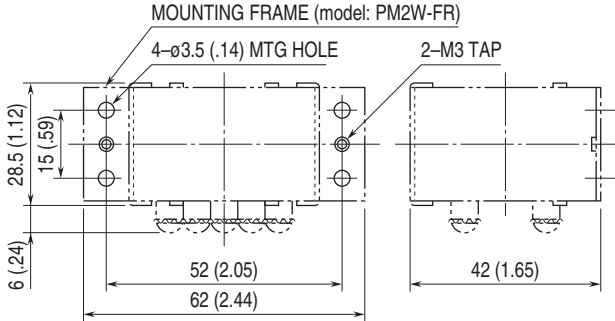

**SCHEMATIC CIRCUITRY & CONNECTION DIAGRAM**

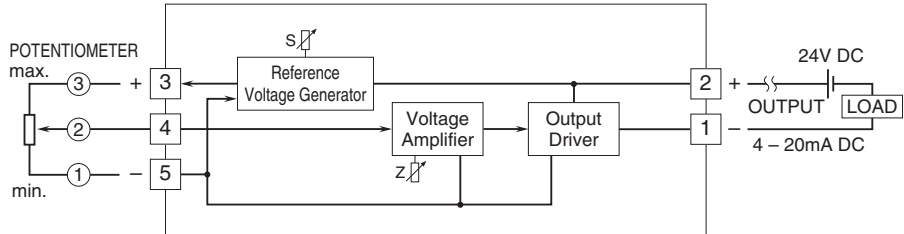

Specifications are subject to change without notice.