


PROGRAMMING UNIT

Functions & Features

- Hand held programmer used for programming input range, adjusting zero/span, etc. for our field programmable transmitters and other products
- Same function as conventional PU-2

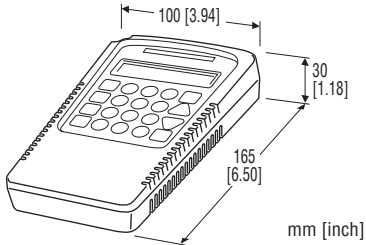

MODEL: PU-2A

ORDERING INFORMATION

- Code number: PU-2A

PACKAGE INCLUDES...

- Connection Cable

GENERAL SPECIFICATIONS

Connection: modular jack (provided with programmer)

INSTALLATION

Power input: supplied from transmitter

Operating temperature: 0 to 45°C (32 to 113°F)

Operating humidity: 30 to 90 %RH (non-condensing)

Weight: 250 g (0.55 lb)

STANDARDS & APPROVALS

EU conformity:


EMC Directive

EMI EN 61000-6-4

EMS EN 61000-6-2

RoHS Directive

EXTERNAL DIMENSIONS unit: mm [inch]

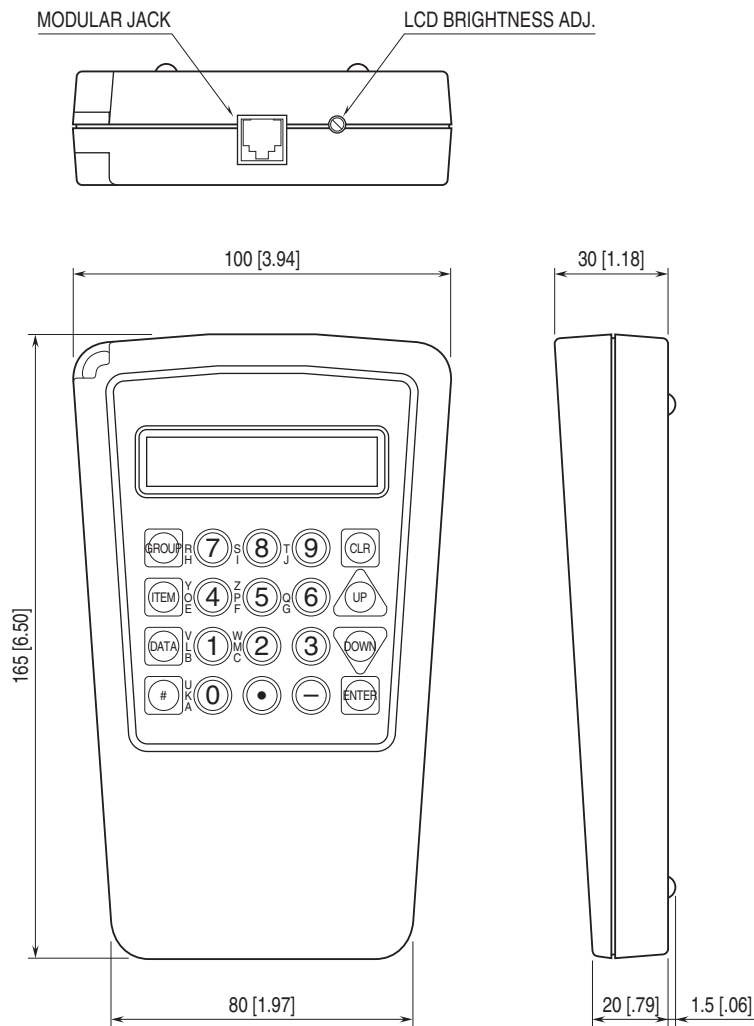

Connection cable is provided.



Specifications are subject to change without notice.